Trailing-edge thickness / opening

Isentropic (zero losses) / $R = 0.5$

50 bar / 600 K total inlet

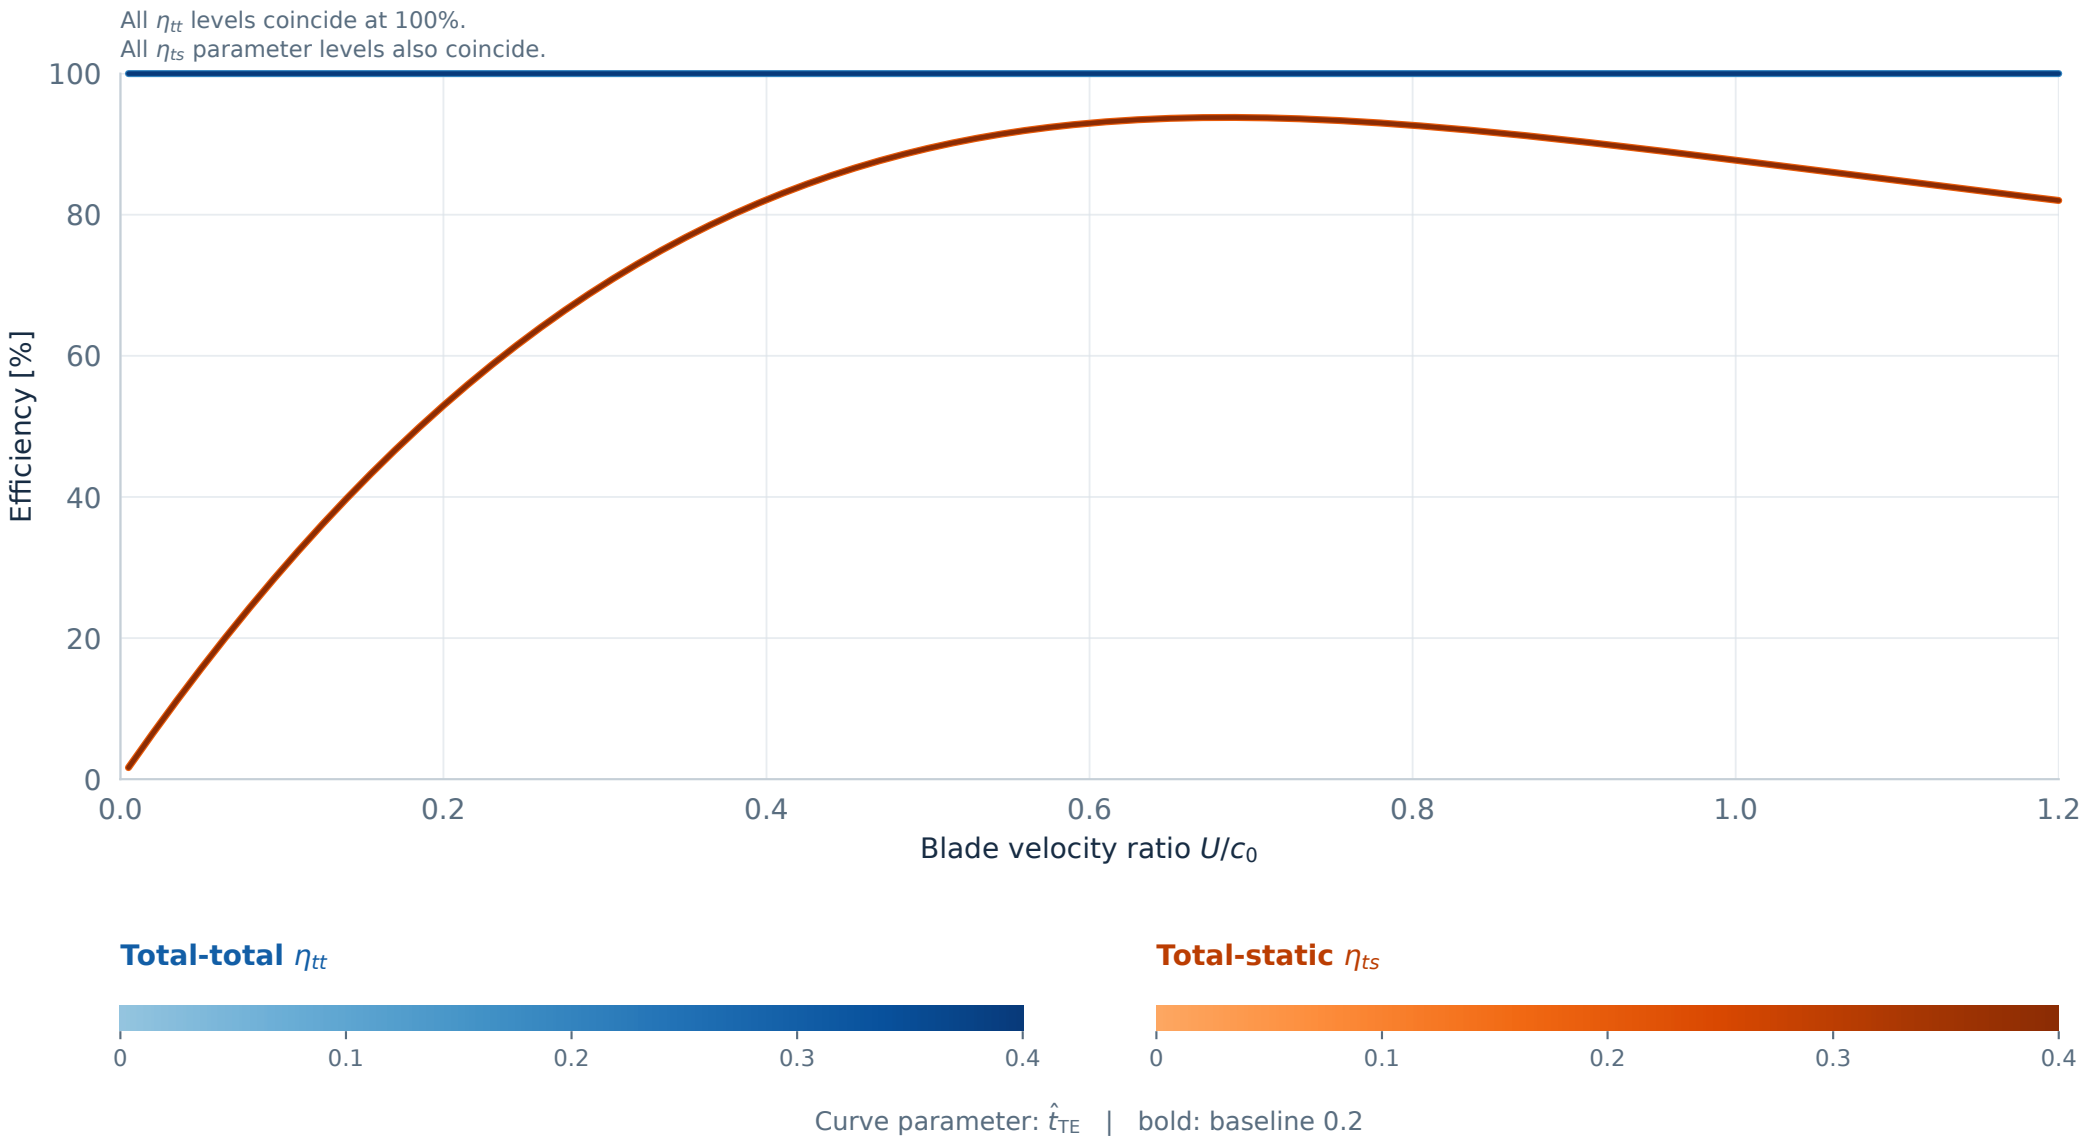

1,200/1,205 finite samples; signed efficiencies retained. Gray: no real reference design.