Mass flow

Kacker–Okapuu / $U/c_0 = 0.6$

50 bar / 600 K total inlet

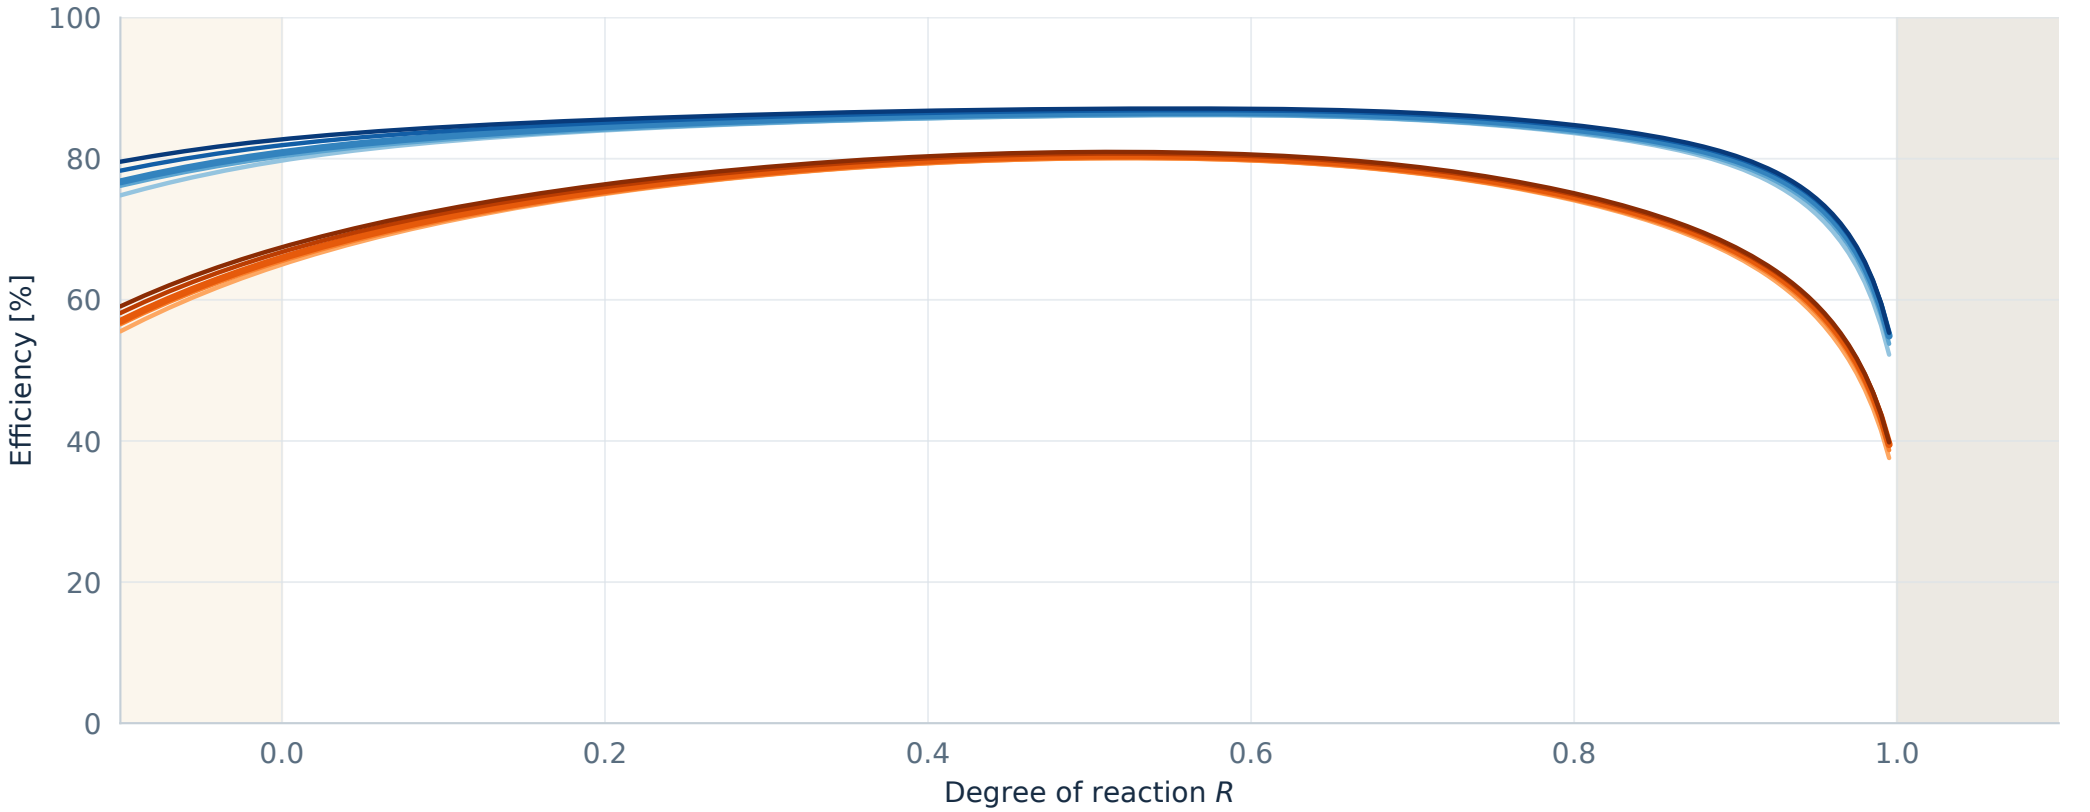

Total-total η_{tt}



Total-static η_{ts}



Curve parameter: $\dot{m}$ [kg/s] | bold: baseline 10

1,100/1,205 finite samples; signed efficiencies retained. Gray: no real reference design.