Trailing-edge thickness / opening

Kacker–Okapuu / $U/c_0 = 0.6$

50 bar / 600 K total inlet

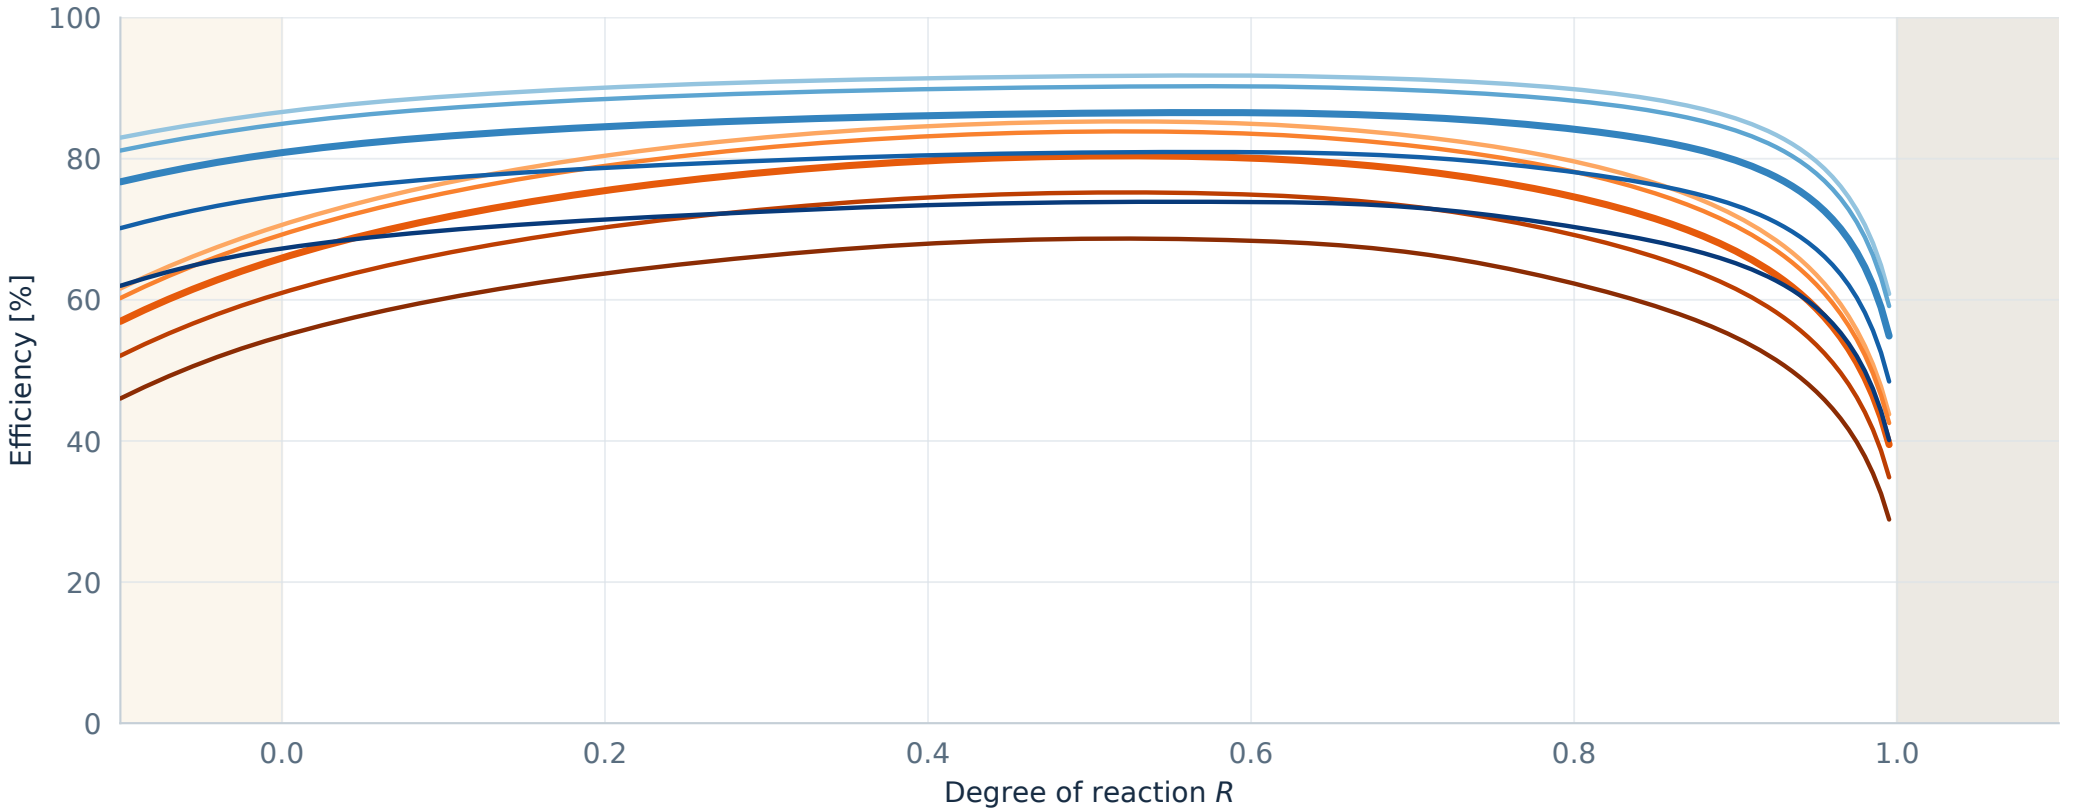

Total-total η_{tt}



Total-static η_{ts}



Curve parameter: $\hat{t}_{TE}$ | bold: baseline 0.2

1,100/1,205 finite samples; signed efficiencies retained. Gray: no real reference design.