Trailing-edge thickness / opening

Kacker–Okapuu / $R = 0.5$

50 bar / 600 K total inlet

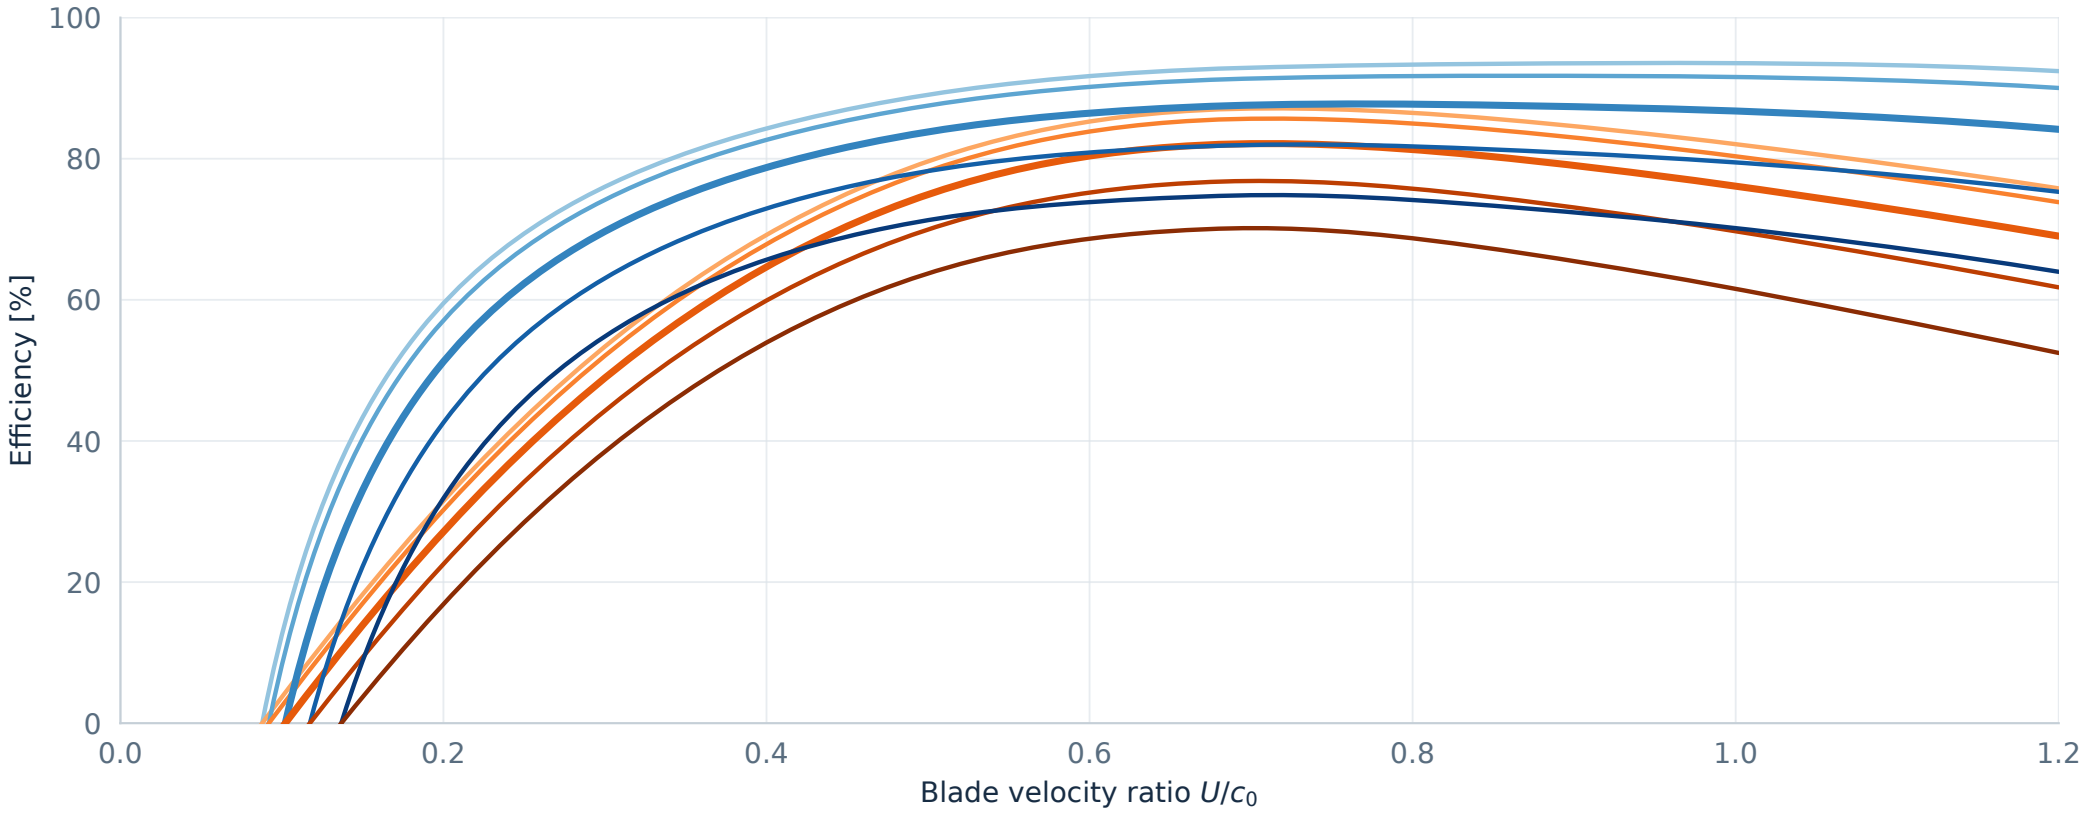

Total-total η_{tt}



Total-static η_{ts}



Curve parameter: $\hat{t}_{TE}$ | bold: baseline 0.2

1,200/1,205 finite samples; signed efficiencies retained. Gray: no real reference design.