Mass flow

Kacker–Okapuu / $R = 0$

50 bar / 600 K total inlet

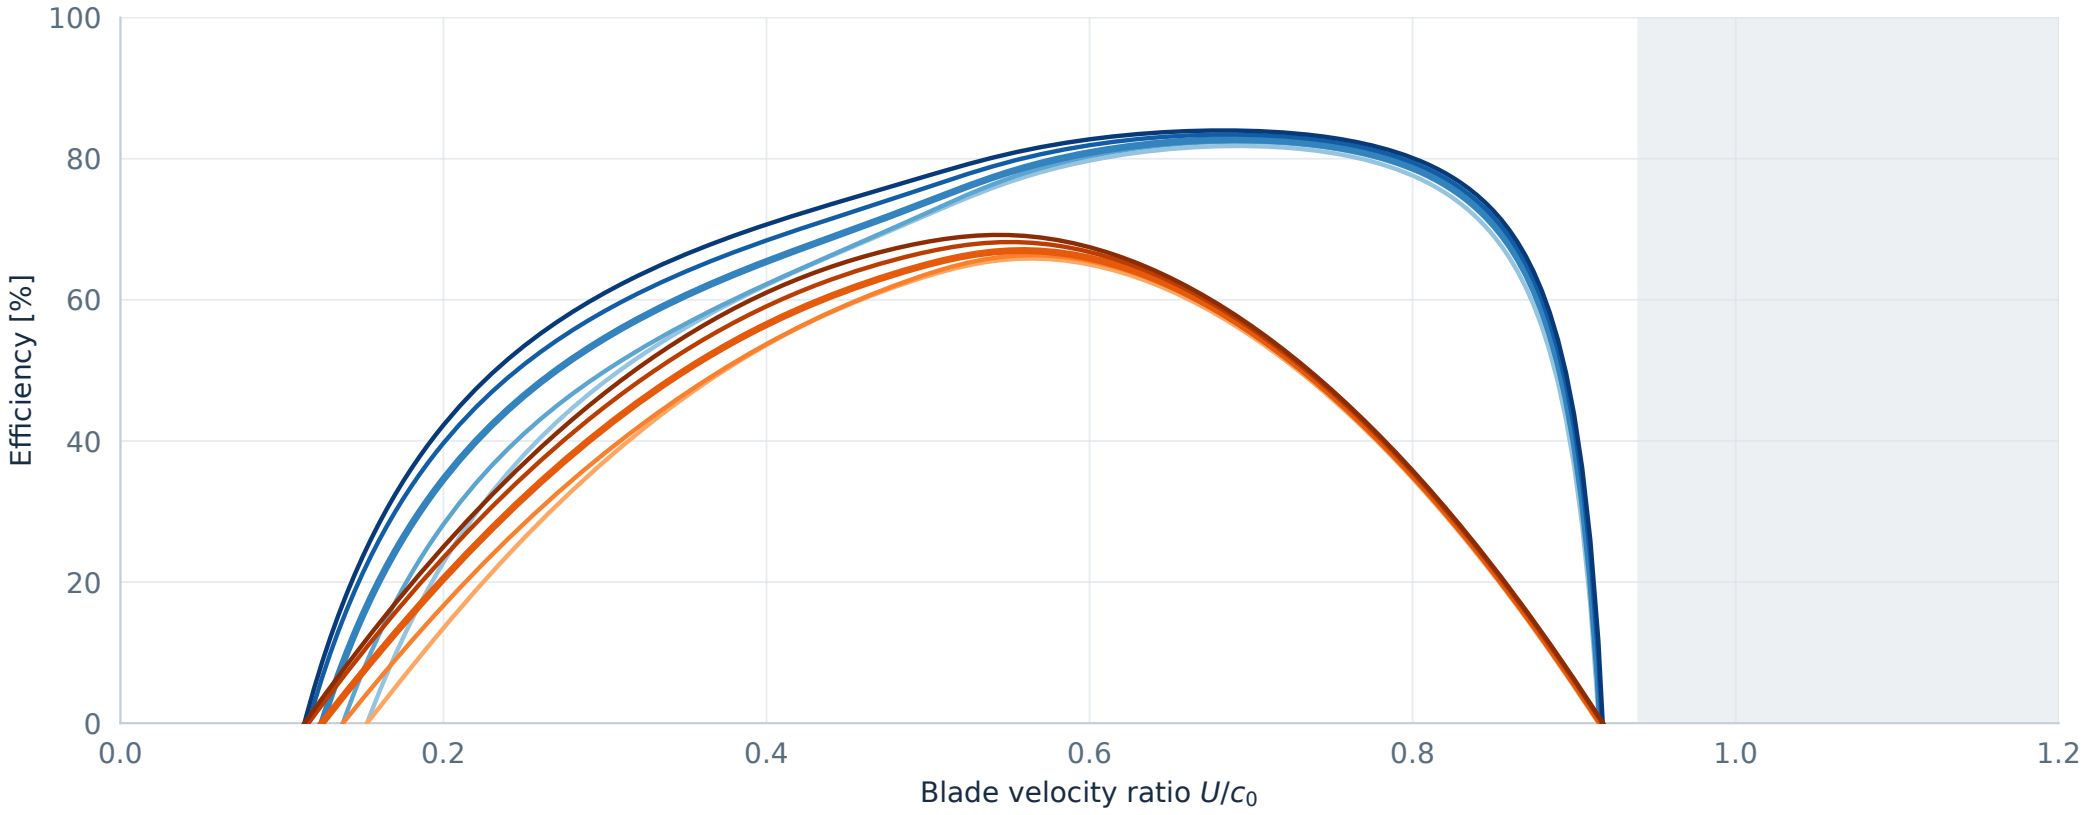

Total-total η_{tt}

0.1 1 10 100 1000

Total-static η_{ts}

0.1 1 10 100 1000

Curve parameter: $\dot{m}$ [kg/s] | bold: baseline 10

935/1,205 finite samples; signed efficiencies retained. Gray: no real reference design.