Trailing-edge thickness / opening

Kacker–Okapuu / $R = 0$

50 bar / 600 K total inlet

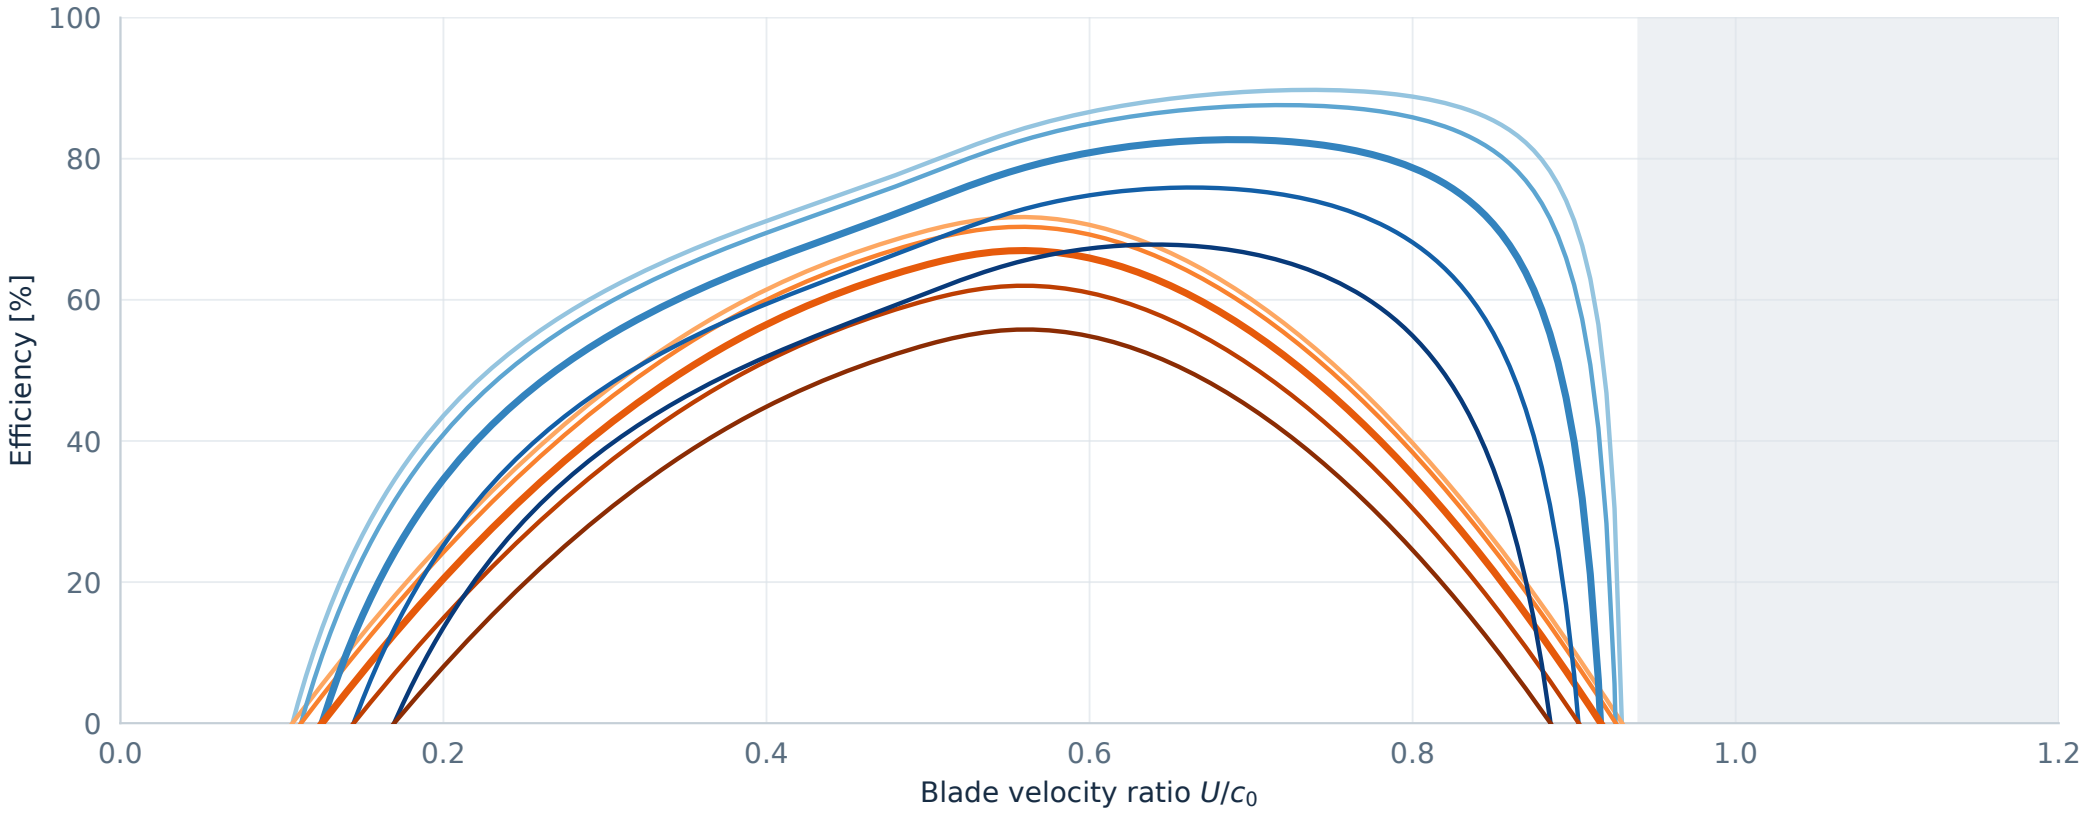

Total-total η_{tt}

0 0.1 0.2 0.3 0.4

Total-static η_{ts}

0 0.1 0.2 0.3 0.4

Curve parameter: $\hat{t}_{TE}$ | bold: baseline 0.2

935/1,205 finite samples; signed efficiencies retained. Gray: no real reference design.