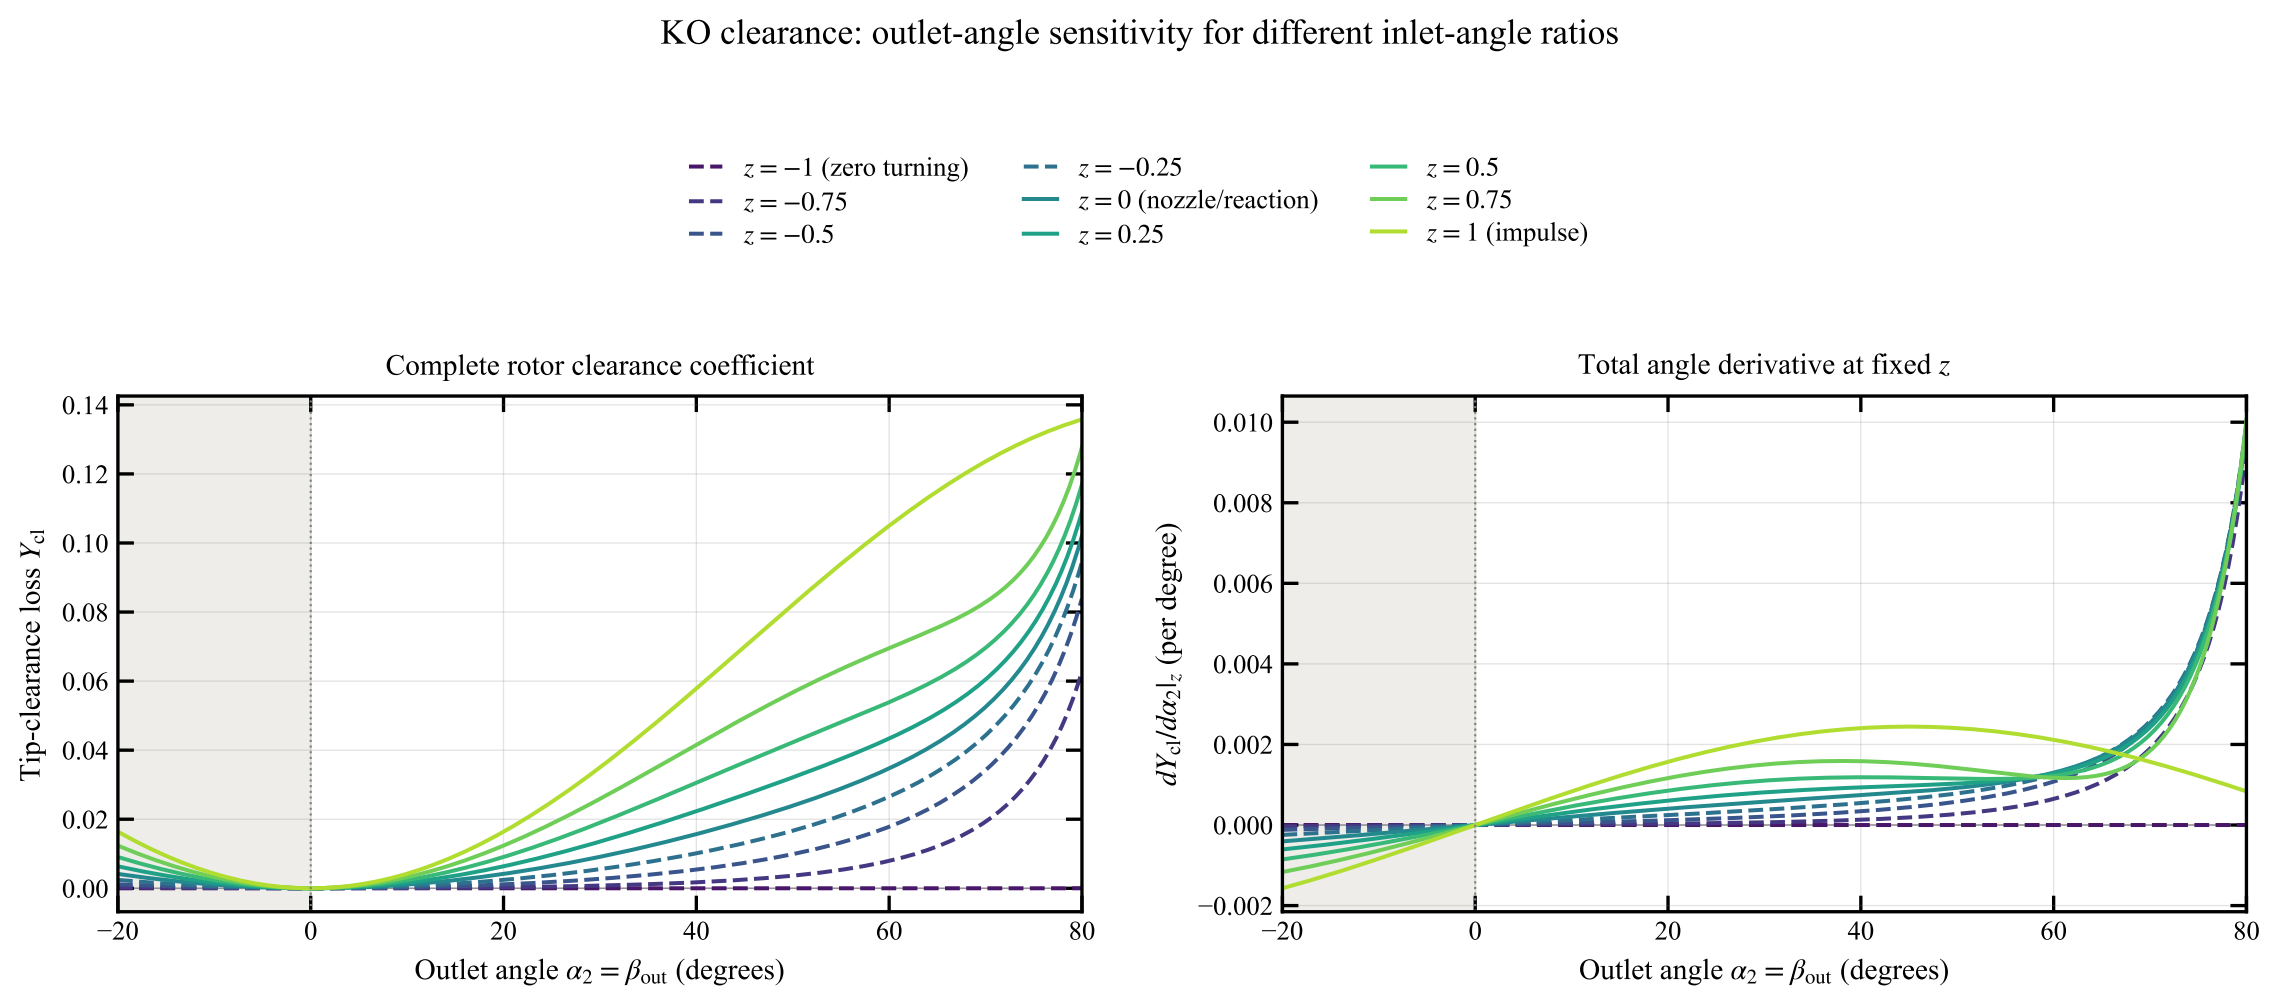


AR = 2; effective gap/height = 0.01; chord = 0.05 m; height = 0.10 m; effective gap = 1 mm.
Inlet flow = inlet metal angle = -z alpha2. Dashed: same-sign inlet/outlet flow (diagnostic extension).
Beige: negative trial outlet angles. Derivatives include both changing angles; stator clearance is zero.