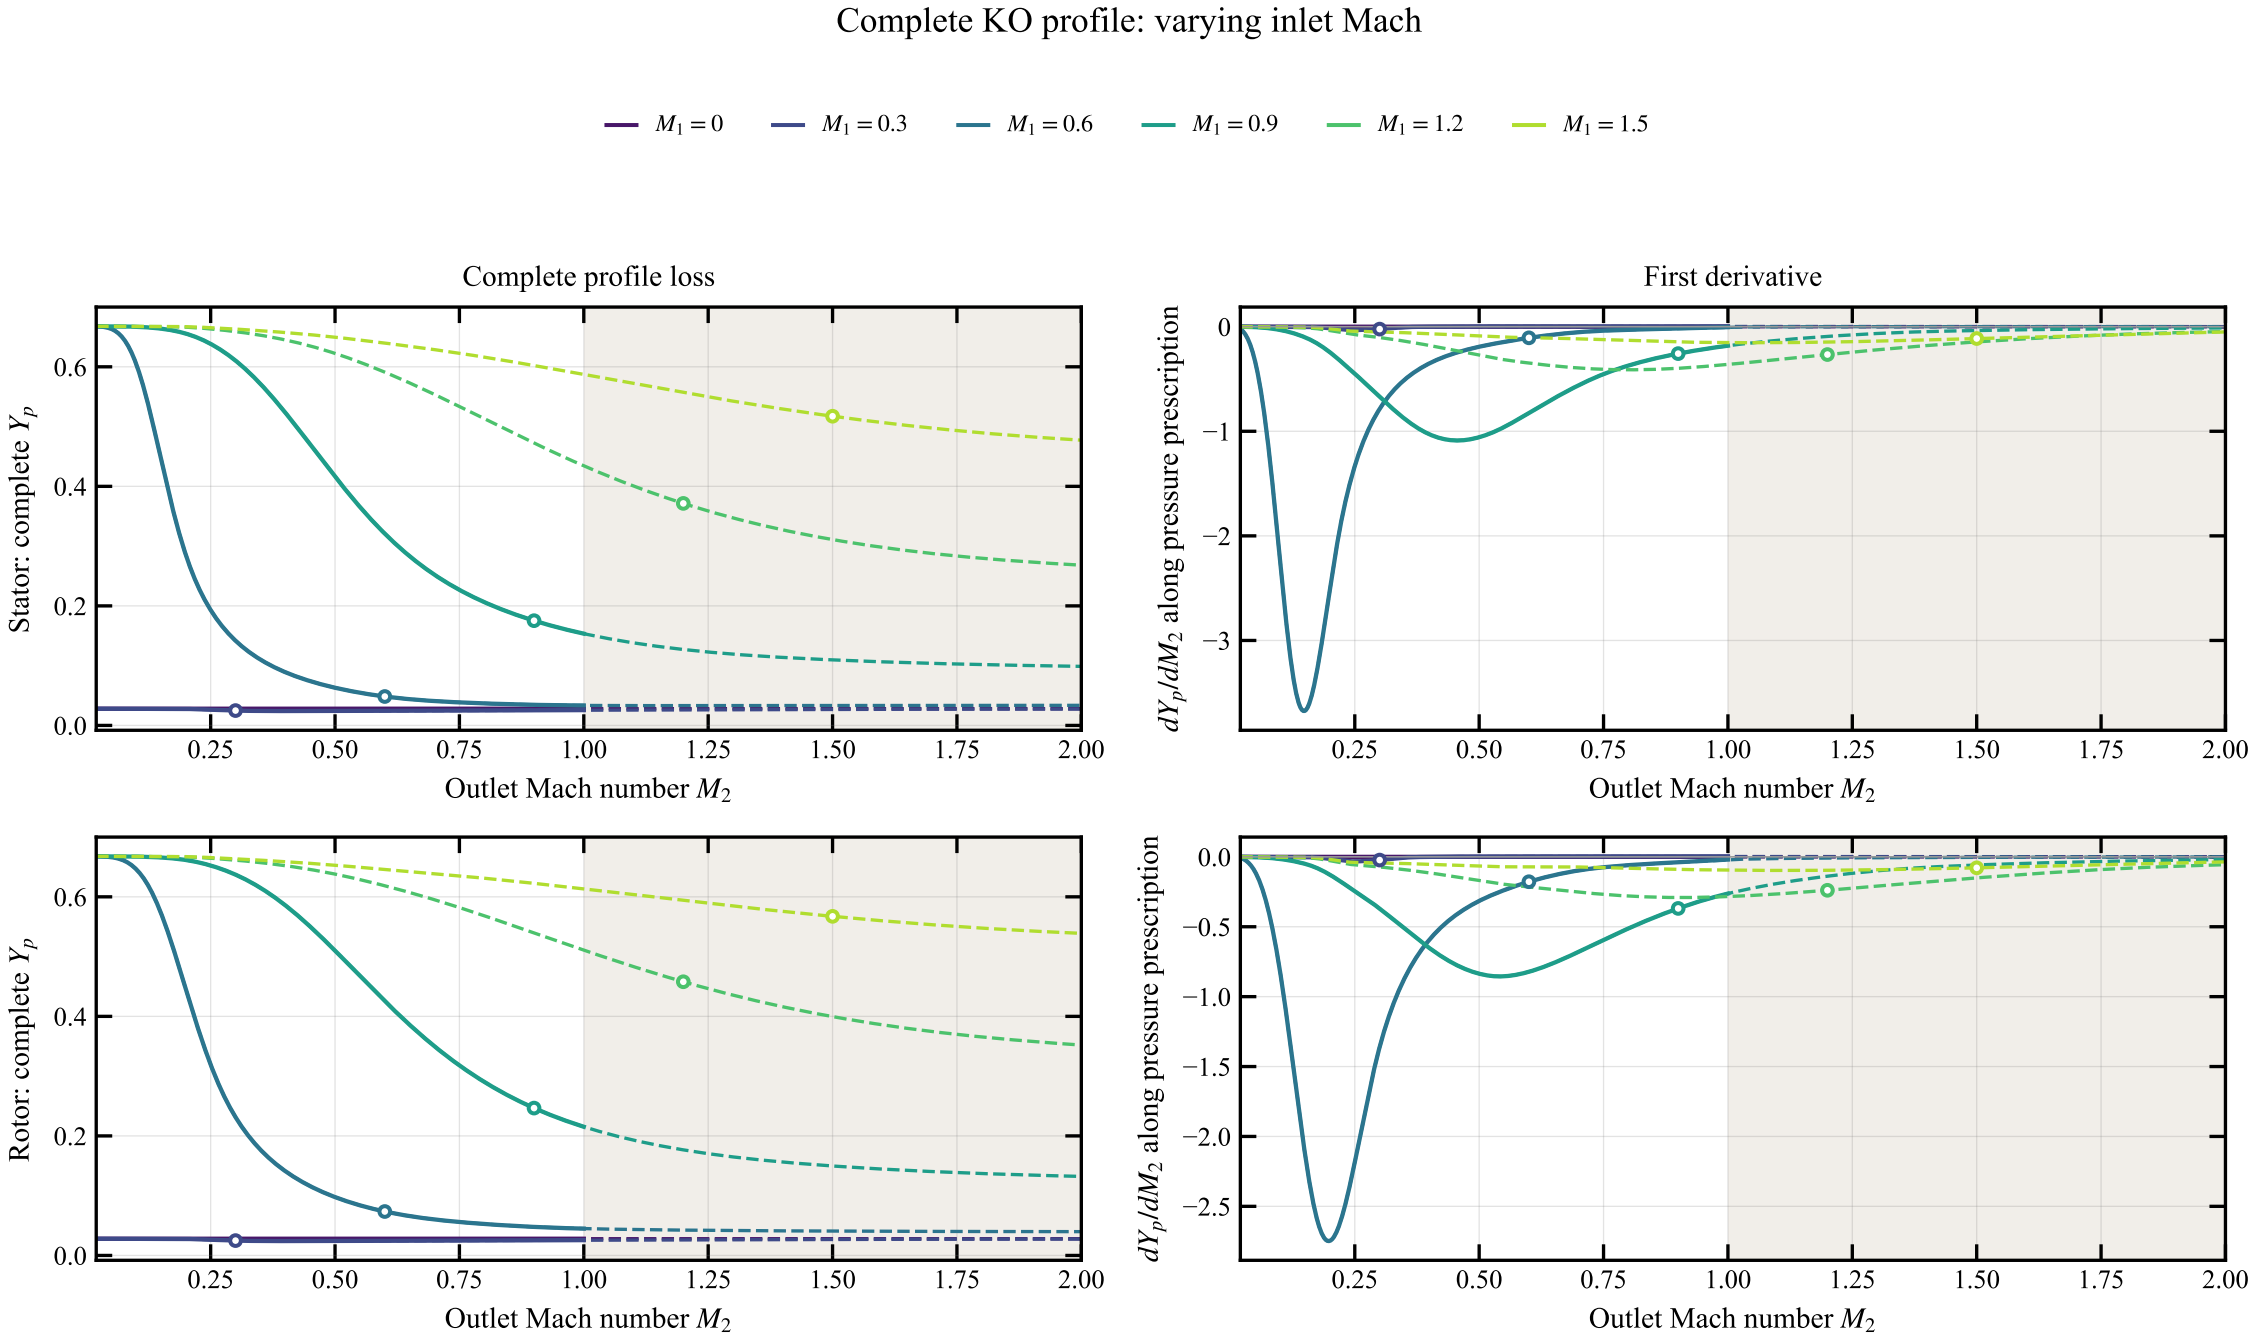

Angle = 60 deg; s/c = 0.7; z = 0.5; thickness/chord = 0.2; Re = 500000; hub/tip = 0.8.
Prescribed gamma = 1.4, equal row-frame p0 = 200 kPa; static pressures vary with Mach.
All M1 > M2 cases included; circles: M1 = M2. Tint: M2 > 1. Dashed: M2 > 1, hub M1 > 1.2 or hub/tip < 0.5.