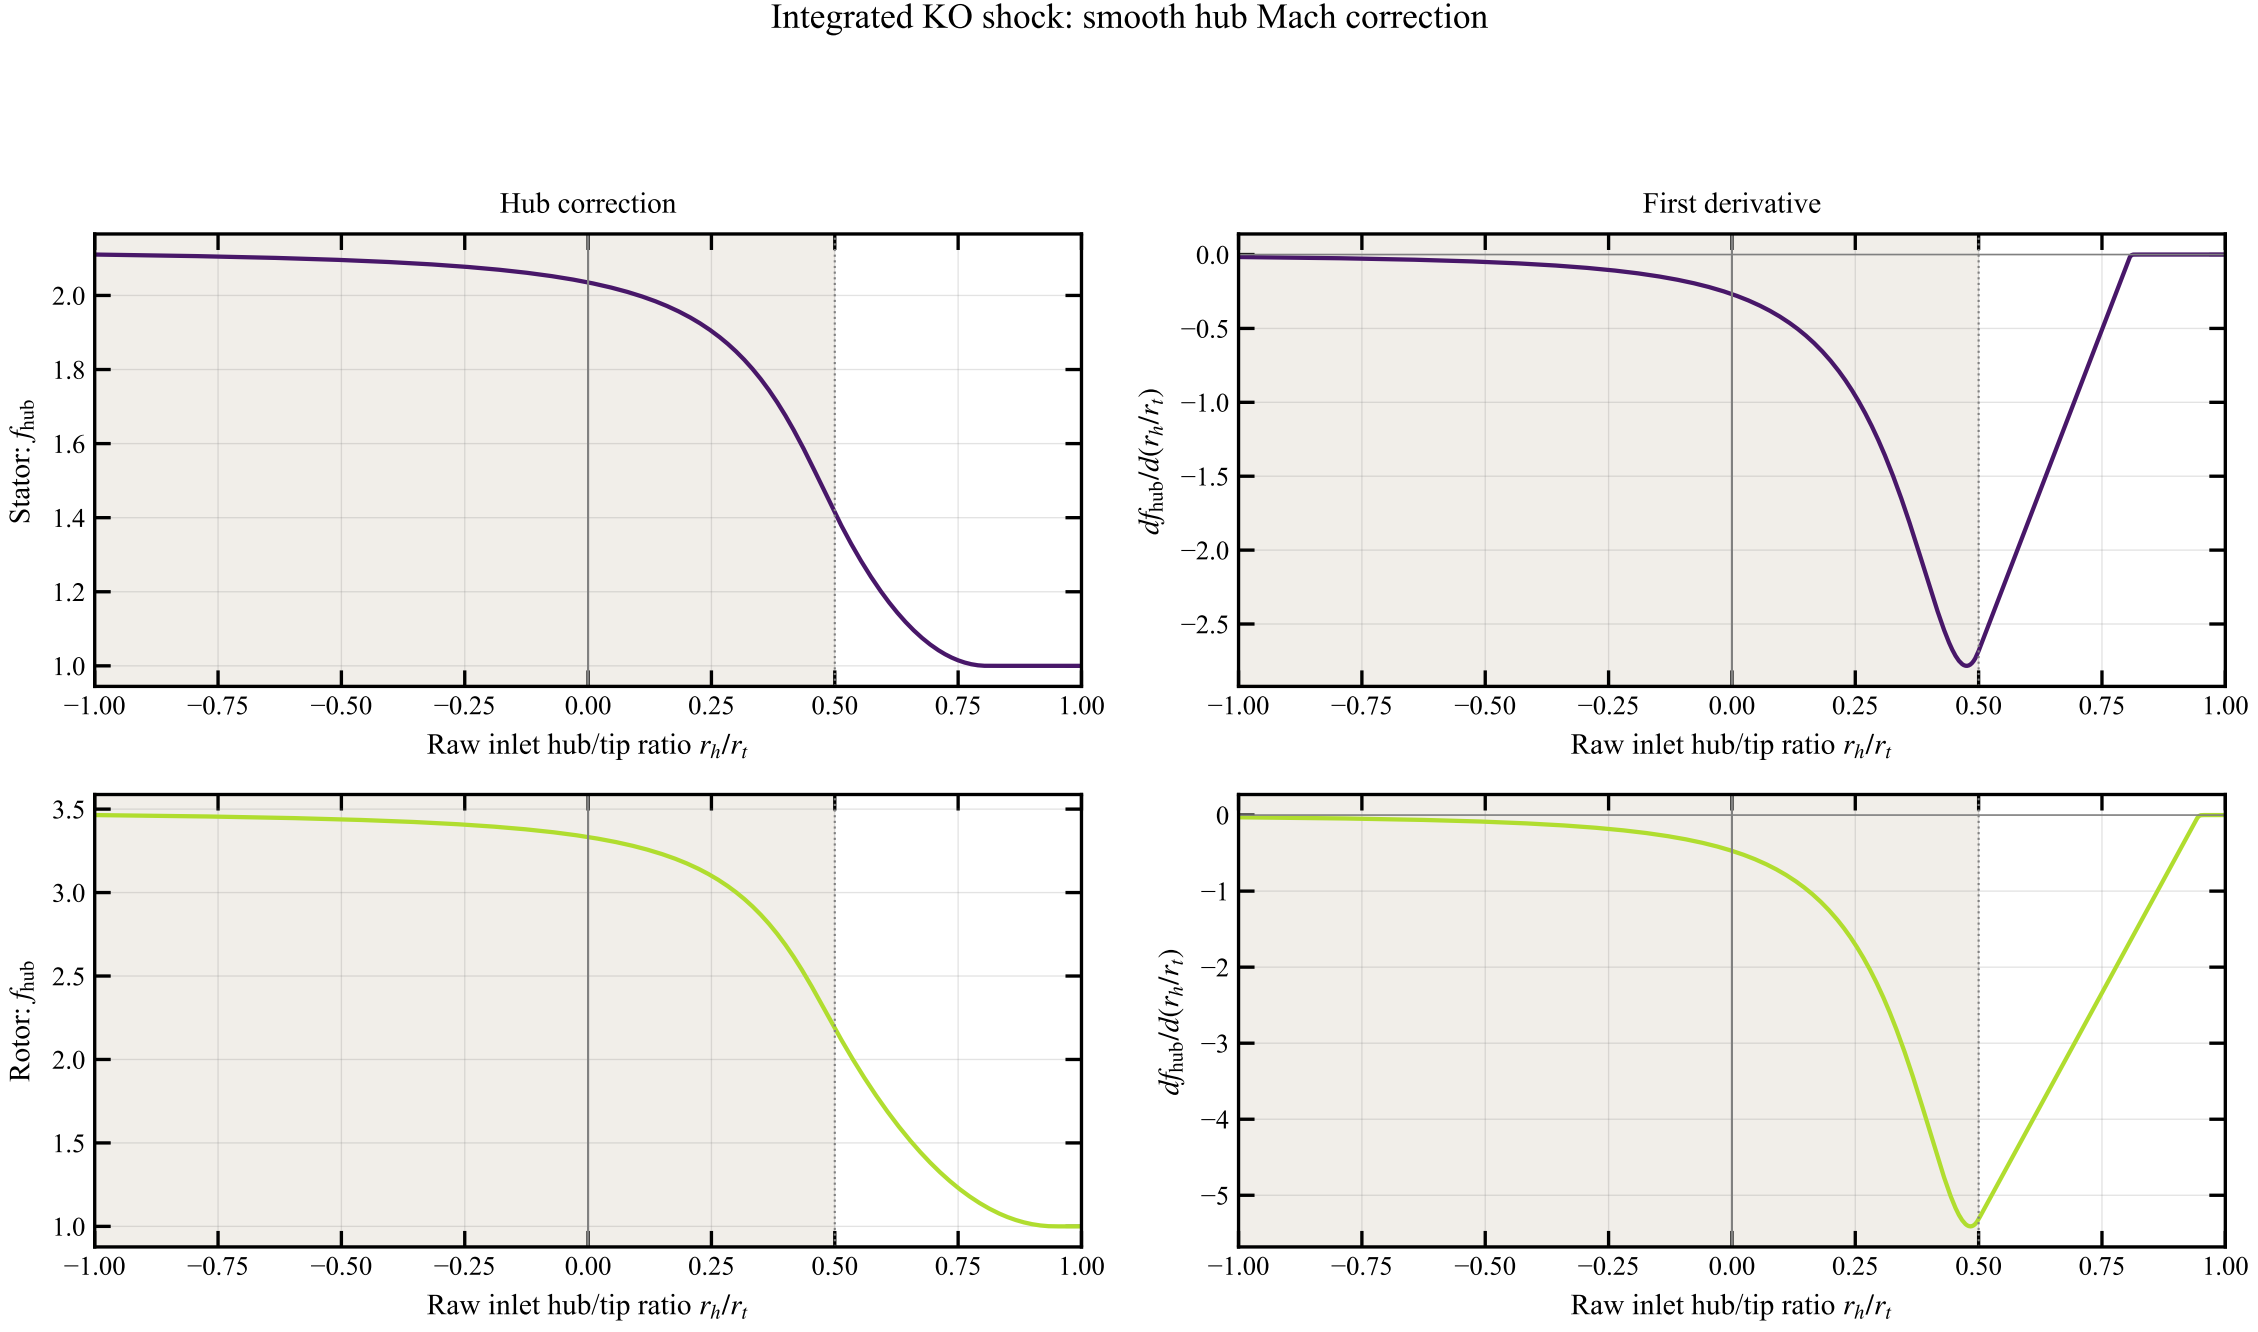
Integrated KO shock: smooth hub Mach correction
Hub correction
First derivative
Stator: f_{hub}
Rotor: f_{hub}
$df_{\mathrm{hub}}/d(r_h/r_t)$
Raw inlet hub/tip ratio r_h/r_t
Tint: raw r_h/r_t < 0.5, beyond the digitized chart. Dotted line: C2 continuation starts at 0.5.
Solid vertical line: zero hub radius. The shared loss coordinate tends to 0.3; signed geometry is retained.