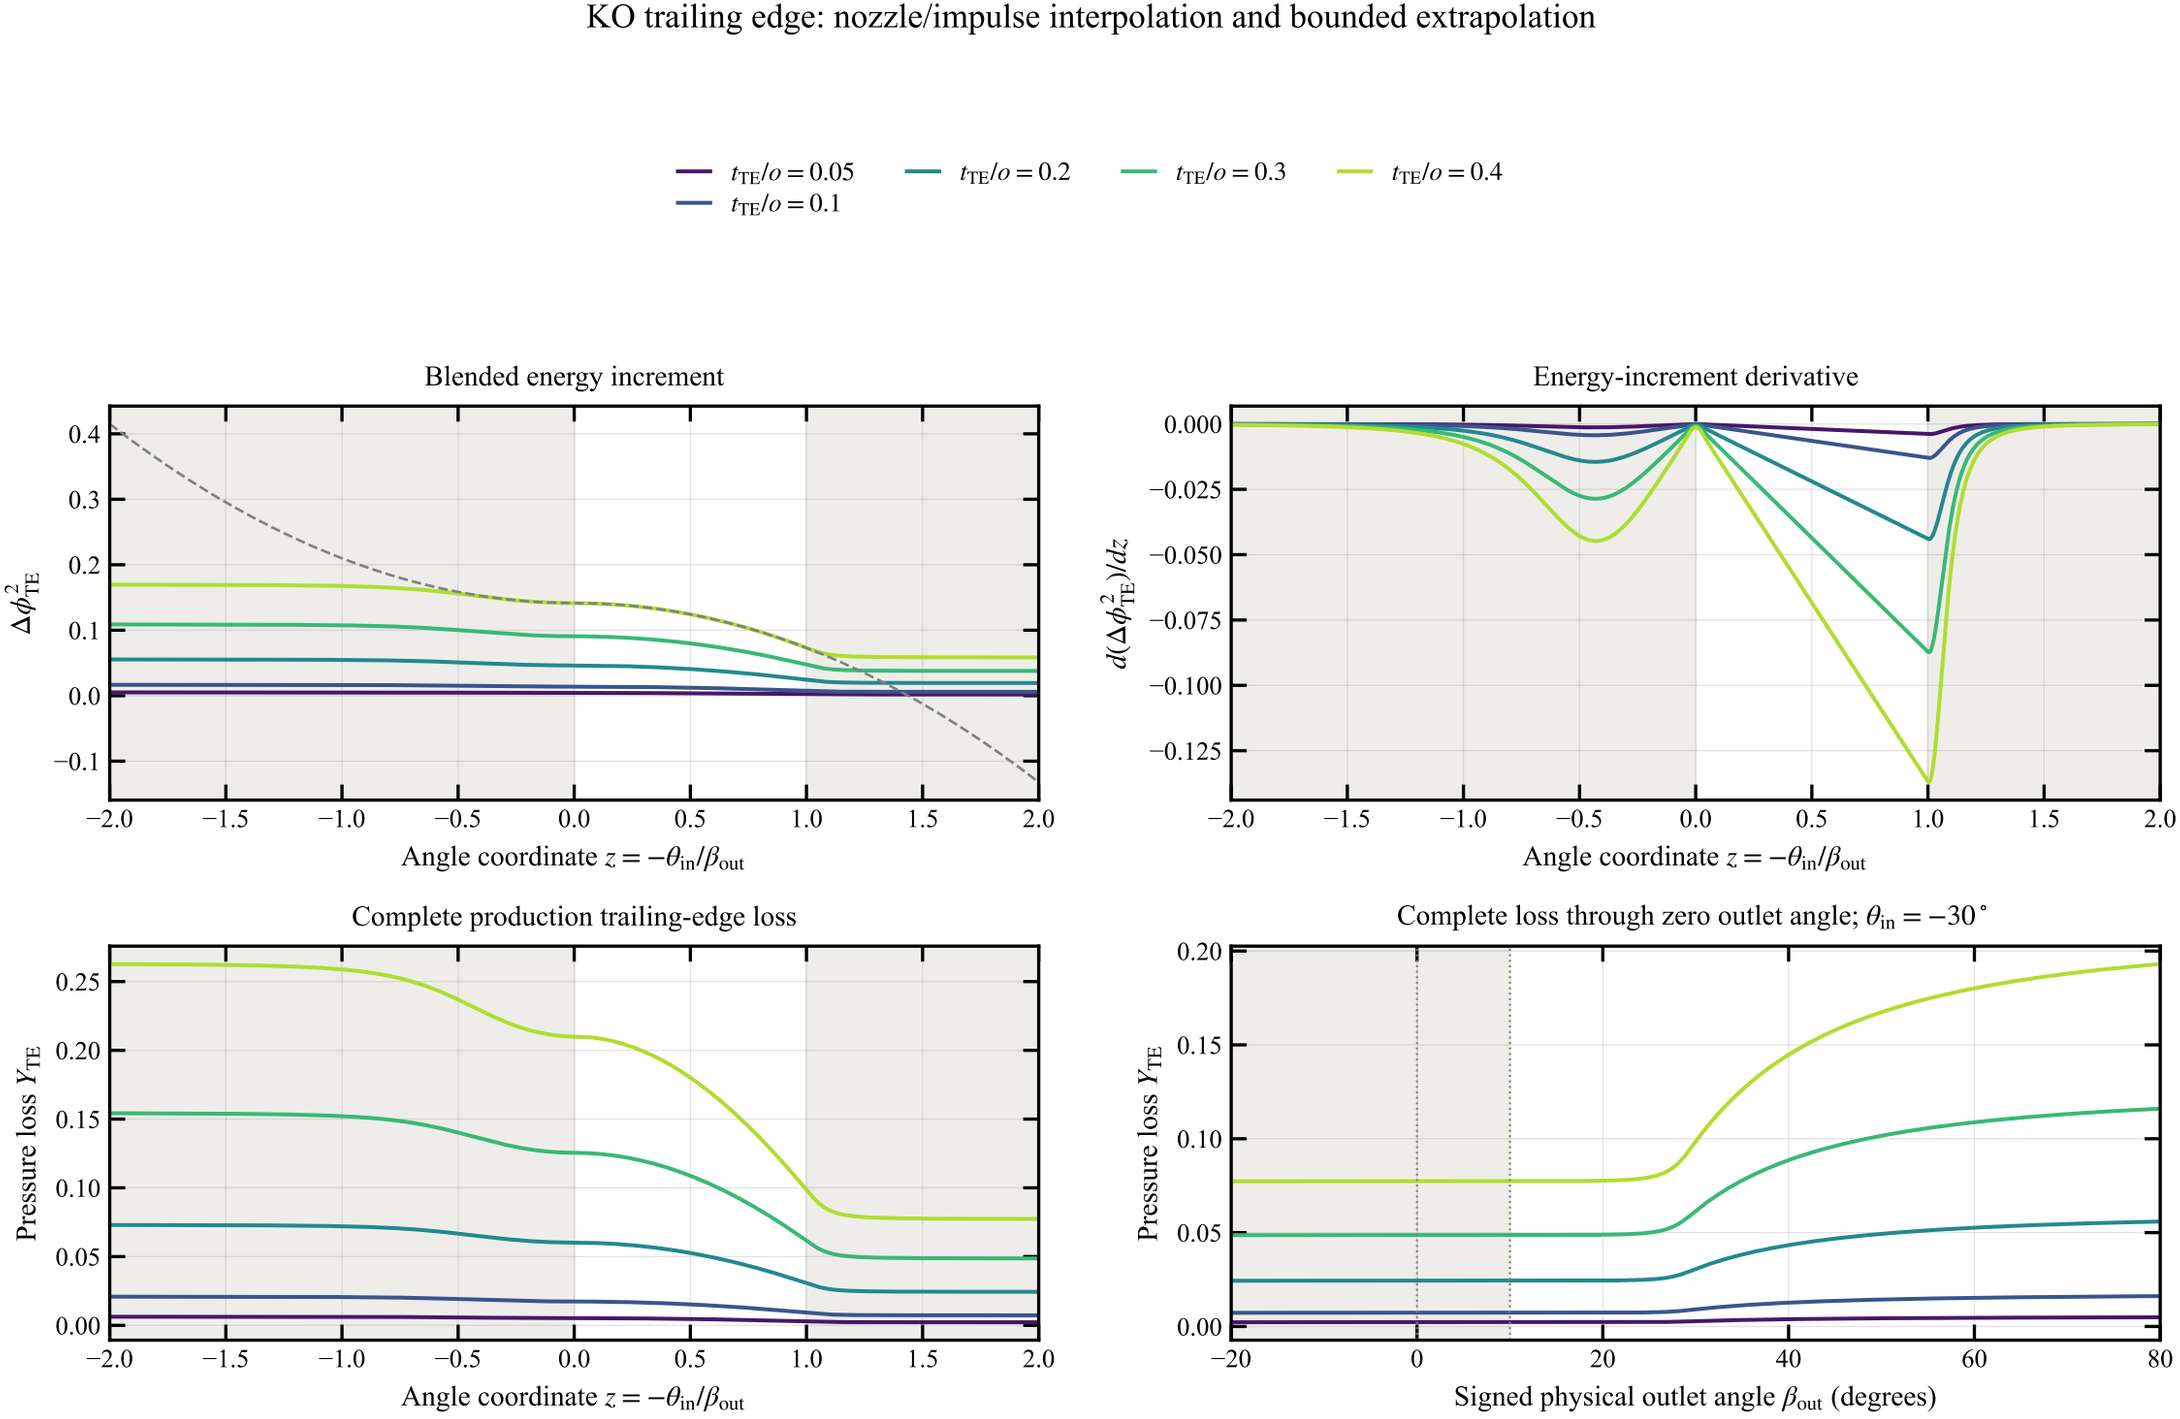

Outlet Mach = 0.7; gamma = 1.4. Three z panels retain z = -2 to 2; beige: outside nozzle/impulse references.
Bottom right: fixed inlet metal = -30 deg, design direction +1. Beige: physical outlet angle below 10 deg.
Dotted: zero and 10 deg. Gray dashed: raw signed-square energy blend for x = 0.4.