



POLITECNICO MILANO 1863

Reverse Engineering of Juno Mission Final report

Course of Space System Engineering & Operations
Academic Year 2023-2024

Group 5

Alex Cristian Turcu	alexcristian.turcu@mail.polimi.it	10711624
Chiara Poli	chiara3.poli@mail.polimi.it	10731504
Daniele Paternoster	daniele.paternoster@mail.polimi.it	10836125
Marcello Pareschi	marcello.pareschi@mail.polimi.it	10723712
Paolo Vanelli	paolo.vanelli@mail.polimi.it	10730510
Riccardo Vidari	riccardo.vidari@mail.polimi.it	10711828

Contents

Contents	i
Homework 1	1
Notation	1
1.1 Introduction	2
1.2 High level goals	2
1.3 Mission drivers	2
1.4 Functional analysis	3
1.5 Main mission phases	4
1.6 ConOps	4
1.7 Payload analysis	5
1.7.1 Instruments overview	5
1.7.2 Payload and Goals correlation	6
1.7.3 Payload and Phases/ConOps correlation	7
1.8 Mission analysis	7
1.8.1 Launch and cruise	7
1.8.2 Jupiter approach and insertion	7
1.8.3 Science operations and extended mission	8
1.8.4 Mission disposal	8
Bibliography	9
Homework 2	10
Notation	10
2.1 Mission analysis and ΔV budget	11
2.1.1 Rationale of the mission analysis	11
2.1.2 Simulation of the interplanetary trajectory	11
2.2 Propulsion system architecture	12
2.3 Reverse engineering of propulsion system	12
Bibliography	13

Homework 1

Notation

MAG	Magnetometer	JEDI	Jupiter Energetic-particle Detector Instrument
HGA	High Gain Antenna	JADE	Jovian Auroral Distribution Experiment
ΔV	Velocity budget	UVS	Ultraviolet Spectrograph
DSN	Deep Space Network	JIRAM	Juno Infra-Red Auroral Mapper
LEOP	Launch and early orbit phase	EGA	Earth Gravity Assist
SECO	Second engine cut off	JOI	Jupiter Orbit Insertion
L+	Time after launch	DSM	Deep Space Manoeuvre
PJ	Perijove number	PRM	Period Reduction Maneuver
MWR	Microwave Radiometer	GSO	Gravity Science Orbit

1.1 Introduction

Juno is a NASA spacecraft orbiting Jupiter. Built by Lockheed Martin and operated by NASA, it was launched by an Atlas V551 on the 5th of August 2011. After 5 years, during which many maneuvers occurred, including an Earth flyby, Juno entered a polar orbit around Jupiter and started its observation, which lasts to this day. Its aim is to study the planet to understand its composition and evolution, analyzing its gravitational and magnetic fields and its atmosphere dynamics. The mission should have ended in 2017, but it is still ongoing^[1] and it will end with a de-orbit that will destroy the spacecraft into the planet's atmosphere to avoid contaminating the environment.

1.2 High level goals

Through an analysis of the mission and payload, the main goals of the mission can be highlighted.

1. How did Jupiter form and influence the solar system?^{[2][3]}

Since Jupiter is the biggest planet of the solar system, it has influenced the formation of all other planets. Its composition has remained unchanged ever since, making it like a time capsule: understanding how and where it formed could give knowledge on Earth and the whole solar system's origin, evolution and characteristics.

2. What's Jupiter's deep structure?^{[3][4]}

One important aspect of the mission is the analysis of Jupiter's deep structure through the measurement of radiations, magnetic and gravitational fields. This allows to comprehend whether or not the planet has a solid nucleus, if so how large it is, and to analyze the supposed layer of metallic hydrogen, compressed so much that it loses its electrons creating a conducting layer. Moreover, Juno will possibly reveal if Jupiter is rotating as a solid body or if the rotating interior is made up of concentric cylinders.

3. What's the structure of Jupiter's atmosphere?^{[3][5]}

One of the mission's goals is to study the composition and dynamics of Jupiter's atmosphere, composed by stripes and dots made of different gasses and vapors, including water, whose percentage has to be defined. A significant aspect of the analysis is the great red spot, a swirling mass of gas bigger than Earth, which resembles a hurricane but is very different in the way it works. The movement of stripes and dots is dictated by the weather, characterized by lighting and thunderstorms, which are observed by Juno.

4. What do auroras look like and what are the physical processes generating them?^{[3][5]}

Juno's orbit is designed to be polar, to allow the observation of Jupiter's poles and the analysis of its auroras, representative of the interaction between charged particles and the atmosphere. Studying this phenomenon allows a better understanding of the atmospheric composition and the magnetic field's structure and extension.

5. What do the poles look like?^[3]

One of Juno's side goals is the observation of Jupiter's poles, which had never been possible before because of the absence of a polar orbiting spacecraft. This also increments the public's involvement in the mission.

1.3 Mission drivers

Being Juno an interplanetary mission starting from a distance of around 1 AU, with a final nominal distance from the Sun of 5.2 AU, and operating in an highly radiation intense environment, the following drivers have been identified:

1. Using proven technologies^[6]

The total program is financed with 1.1 Billion \$ for 74 months from the launch date and includes development of the spacecraft, science instruments, launch services, mission operations, science processing and relay support. The simplicity and the need of proven technologies was thus fundamental. The spacecraft is mainly maintained stable during the maneuvers thanks to its spin, raised to 5 RPM from 2, nominal condition during science operations, reducing the need of active stabilization methods.

2. Providing enough electricity during the duration of the mission^{[3][6][7][8][9]}

The journey of Juno is long and passes through different regions of the solar system. Solar panels were chosen to provide electric energy across the mission over a nuclear source, since it has been decided that it was better to advance technology of solar cells rather than developing a new reactor. It is the first spacecraft to operate with solar panels at such distance from the Sun. The system needed is thus oversized at 1 AU: the solar radiation on Jupiter is in fact up to 96% lower than on Earth. Furthermore the operations are scheduled to begin around 5 years into the mission, so degradation of the solar cells must be taken into account. The final design consists in 11 solar panels, eight are 9 by 2.65 m each, meanwhile the inner three are only 2 m wide, resulting in a surface of about 60 m² and granting a maximum power of 14 kW around Earth and up to 500 W around Jupiter. The solar panels are mounted in three arrays on the side of hexagonal body of the spacecraft at 120° one by the other, three arrays are composed by 4 panels, one by 3. This configuration is needed to mount the MAG faraway from the electronics and store everything correctly inside the fairing. Before separation from the upper stage, the spacecraft is spinning at around 1.4 RPM and the deployment of the solar arrays slows it down to 1 RPM. Moreover, since the fly-by around Earth is done to gain ΔV , the spacecraft will be in an eclipse for around 20

minutes: attention must be paid to size the battery. Two lithium-ions battery of 55 Ah each are present to make sure power is always provided. The nominal polar orbit around Jupiter allows Sun pointing during the majority of nominal Science Operation phase.

3. Shielding the instruments from the harsh environment of Jupiter^{[1][2][10][11]}

To accomplish its goals, Juno will need to cross the Jupiter radiation belts: a heavy shielding structure is needed. The magnetosphere represents a great challenge for Juno: the value of the magnetic field measured at its perijove is 776 μT , 50% higher than expected. The main issue with Juno is represented by the ionizing particles present in the belt around Jupiter: with measured value up to of tens and hundreds of MeV ions located between 2 and 4 R_J , order of GeV were expected under 2 R_J , where Juno should pass through to reach a lower altitude, thanks to its highly elliptical orbit, where radiations are lower, to perform science. The vault in which all the electronics is preserved is cubed shaped and it is made of 1 cm thick titanium alloy, 144 kg in total. The top deck of Juno is planned to receive a radiation dose of 22 Mrad. Moreover, star trackers are also heavily shielded.

4. Maintaining communication during the journey and the science operations^[6]

The attitude of the spacecraft is defined in a way to point Earth during most of the cruise and science operations. This configuration, given the distance from the Sun and the Earth, grants also a sufficient inclinations of the solar panels with respect to the Sun to provide enough electric power. The ground equipment used by Juno is NASA's DSN.

1.4 Functional analysis

Functional analysis is performed in order to identify the functionalities that the spacecraft must perform during the mission. The identified functionalities are schematized in Figure 1.1.



Figure 1.1: Functional analysis for Juno mission

1.5 Main mission phases

The Juno mission was divided into five phases: LEOP, Cruise, Jupiter approach and insertion, Science Operations and De-orbit.

1. LEOP

Following the launch from Cape Canaveral, the spacecraft entered a low Earth parking orbit.^[6] Afterwards Juno was injected in an interplanetary trajectory and was separated from its upper stage after SECO-2 at time L+54 min. The solar panels deployment was performed about five minutes after the spacecraft separation, and it took approximately five minutes.

2. Cruise

The cruise had a duration of about five years, during which two deep space manoeuvres, multiple minor corrections and an Earth fly-by were performed. All manoeuvres will be better described in [section 1.8](#). This phase also included instruments testing and verification, to ensure they were functioning properly and ready for the usage during the mission.

3. Jupiter approach and insertion

This phase began four days before the start of orbit insertion manoeuvre and ended one hour after the start of the orbit insertion manoeuvre. The latter occurred at closest approach to Jupiter and slowed the spacecraft down enough to let it be captured by Jupiter in a 53-days period orbit. The Jupiter orbit insertion burn was performed by the Leros 1-b main engine, and it lasted 30 minutes. After the burn, the spacecraft was in a polar orbit around Jupiter. The 53-days orbit provided substantial propellant savings with respect to the direct insertion in the operational orbit.

4. Science operations

The Juno polar and highly eccentric orbit was designed to facilitate the close-in measurements and to minimize the time spent in the Jupiter radiation belts. During this phase all the science operations, in different attitudes, are being performed.

5. De-orbit

The de-orbit phase will occur during the final orbit of the mission. The latter was designed to satisfy NASA's planetary protection requirements and ensure that Juno doesn't impact any of Jupiter's moons. A de-orbit burn will be performed, placing the spacecraft on a trajectory towards Jupiter inner and denser layer of the atmosphere where it will burn up.

1.6 ConOps

The mission's Conceptual Operations are summarized in [Figure 1.2](#).



Figure 1.2: Conceptual Operations, time not in scale^{[6][2][12][13]}

1.7 Payload analysis

1.7.1 Instruments overview

As previously described in [section 1.2](#) the mission scientific goals are quite numerous and diverse. Thus, to achieve all of them, the payload consists of several instruments, nine to be precise, covering a wide spectrum of experimentation. In its entirety the payload has a mass of around 174 kg and consumes approximately 125 W of power excluding the Gravity science experiment.^[7] Here we have a brief overview of all the singular instruments where, unless otherwise specified, only the sensors are mounted on the exterior of the spacecraft, while all the relevant electronics are located inside the radiation vault.

- **Magnetometer (MAG):** As the name implies its objective is to accurately measure Jupiter's magnetic field, achieved by employing two flux-gate magnetometers, a scalar helium magnetometer and two star cameras. All the sensors are mounted on the magnetometer boom, located at the end of one of the solar array wings to reduce the interference from the spacecraft itself. Even then the presence of two magnetometers allows to subtract this contribution from the measurement.
- **Microwave Radiometer (MWR):** It consists of six antennas which measure six different frequencies (600 MHz, 1.2 GHz, 2.4 GHz, 4.8 GHz, 9.6 GHz and 22 GHz) in order to investigate the Jovian atmosphere below the visible external layer. A key objective of this analysis is also the determination of the abundance of water inside the planet. The antennas are mounted on two sides of the hexagonal prism that constitutes the main body of the spacecraft, relying on its spin to survey Jupiter.
- **Gravity science:** It's quite a unique instrument as it's composed both by a space and a ground elements, which mainly consists with the telecommunication systems of both the spacecraft and ground stations. This is because this experiment is based on measuring the doppler shift in the returning signal from Juno which, allows to characterize Jupiter's gravitational field. Thus the instrument can't really be separated from the telecommunication hardware, which is the reason why its weight and power requirement were omitted in the previously shown totals.
- **Jupiter Energetic-particle Detector Instrument (JEDI):** It detects high energy electrons and ions present in the Jovian magnetosphere, which are discriminated by composition. Each sensor is characterized by six electron and six ion viewing directions that together cover a $160^\circ \times 12^\circ$ field of view. In total three sensors are present on Juno, two arranged to obtain an almost complete 360° view perpendicular to the spacecraft spin axis, while the third one is instead aligned with it to achieve a full scan of the sky over one spin period. As the JEDI sensors are self-contained units no electronic hardware is present within the radiation vault.
- **Jovian Auroral Distribution Experiment (JADE):** It detects low energy electrons and ions with the same goal of characterizing the magnetosphere as JEDI. The instrument comprises of three identical electron energy per charge analyzers (JADE-E) and a single ion mass spectrometer (JADE-I). The electron sensors are located on the three sides of the spacecraft that do not house the solar arrays pointing outwards, to again obtain a complete view normal to the spin axis. The spectrometer field of view, instead, contains the spin axis and like the third JEDI sensor it scans all the sky over a full rotation.
- **Ultraviolet Spectrograph (UVS):** This instrument images and measures the spectrum of the Jovian aurora in order to understand its morphology and source. The chosen ultraviolet range of $68 \div 210$ nm covers all of the most important UV emissions from the aurora, mainly the H Lyman series and longer wavelengths from hydrocarbons. The sensor is mounted on the side of Juno, relying once more on the spinning of the spacecraft to achieve a full sweep of the planet.
- **Radio and Plasma Waves (Waves):** Its objective is to study both components of the electromagnetic field generated by plasma and radio waves inside the polar regions of Jupiter's magnetosphere to understand its interaction with the atmosphere and magnetic field. To detect the electric component a V-shaped dipole antenna is used, while for the magnetic component a much smaller magnetic search coil is employed. Both sensors cover a vast range of frequencies, namely from 50 Hz up to 40 MHz.
- **Visible-spectrum Camera (JunoCam):** It's designed to provide highly detailed color images of Jupiter to help and support public engagement of the mission without any real scientific purpose. The instrument is thus only comprised of the camera itself, mounted on the side of the spacecraft, and all the necessary electronics which, given the less critical objective and relaxed radiation tolerance requirements, aren't housed in the radiation vault.
- **Juno Infra-Red Auroral Mapper (JIRAM):** It's an infrared imager and spectrometer that studies the Jovian atmosphere in the $2 \div 5 \mu\text{m}$ range complementing both the atmospheric and magnetospheric experiments. This instrument is also completely housed outside of the radiation vault since it is a late addition after mission selection, reason for both the relaxed radiation requirements and less than ideal positioning of the sensor on the aft deck of the spacecraft.

All the instruments and their positions can be seen in Figure 1.3.



Figure 1.3: Positioning of the instruments on the spacecraft

1.7.2 Payload and Goals correlation

There is a notable overlap in the main objectives of the payload instruments, both in the sense that multiple ones collaborate towards a single scientific goal, but also in the sense that a single instrument can address multiple goals. All of these relations are exemplified in Table 1.1.

Guiding questions	Science objectives	Measurements objectives
How did Jupiter form and influence the solar system?	Determine Jupiter's inner composition	Composition analysis: MWR
What's Jupiter's deep structure?	Analyze gravitational and magnetic field, measure water abundance in the planet	Gravitational field analysis: Gravity science Magnetic field analysis: MAG Water abundance measurements: MWR
What's the structure of Jupiter's atmosphere?	Analyze atmospheric composition and dynamics	Atmospheric composition determination: MWR Atmospheric dynamics study: JIRAM
What do auroras look like and what are the physical processes generating them?	Image auroras, study interactions between atmosphere and magnetic field, characterize the magnetosphere in the polar regions	Imaging auroras: UVS, JIRAM Atmosphere-magnetic field interaction: JIRAM Characterize the magnetosphere: Waves, JADE, JEDI

Table 1.1: Mission goals and instrument objectives correlation

It can be noted that the JunoCam instrument doesn't appear in the table since it's not part of the scientific goals of the mission, as previously mentioned in its description.

1.7.3 Payload and Phases/ConOps correlation

Another high-level correlation can be highlighted between the mission phases/ConOps and the activities of the payload as shown in Table 1.2.^[6]

Mission phases	Payload activities
LEOP	Mag boom is deployed together with solar arrays
Cruise	Instruments checks are performed regularly and the high gain antenna (used for Gravity science) is calibrated and aligned
Jupiter approach and insertion	Final instruments checks are carried out together with some initial scientific observations of Jupiter
Science operations	Complete nominal operation of the payload with observations divided between Gravity science passes (Earth pointing) and MWR passes (Nadir pointing)
De-orbit	No planned payload operations

Table 1.2: Mission phases/ConOps and Payload activities correlation

1.8 Mission analysis

1.8.1 Launch and cruise

The spacecraft was launched into orbit with an Atlas V 551 Rocket from Cape Canaveral. The actual launch date belonged to a 21-day time window limited by a number of events and their timings such as the Deep Space Maneuvers, the Earth Flyby, the Jupiter Insertion and the science orbits. The adopted transfer strategy allowed for significant reduction in ΔV with respect to a direct transfer between Earth and Jupiter.

Following the launch, after booster separation, Juno was put in a low Earth parking orbit thanks to a first burn of the Centaur upper stage. Afterwards, at time L+645 s, via a second burn given by the same stage, Juno entered an heliocentric trajectory. Solar arrays were deployed and initial checks on the instruments were performed at this time. This procedure is fundamental in order to provide enough electrical power to the spacecraft to perform initial check on its health. The specific trajectory followed by Juno is called "2 + dV-EGA", which means that the spacecraft will perform an Earth gravity assist at around two years after launch. During the initial cruise various correction maneuvers were performed: the main ones being the two DSMs needed to place Juno on the correct path to achieve the planned fly-by. DSMs were performed near the apocentre, located farther away from the Sun than Mars' orbit, causing the spacecraft to pass as close as 0.88 AU before approaching Earth. During the approach to perform the fly-by, attitude corrections were performed to protect the spacecraft by the incoming radiation from the Sun. The fly-by around Earth occurred on the 10th of September 2013 and puts the spacecraft on its final trajectory to Jupiter. Particularly, the fly-by gave the spacecraft 7.3 km/s, avoiding a fire-up of the Leros 1-b main engine of Juno. A last correction maneuver was performed to refine Juno's trajectory.^{[4][6][9][14][15]}

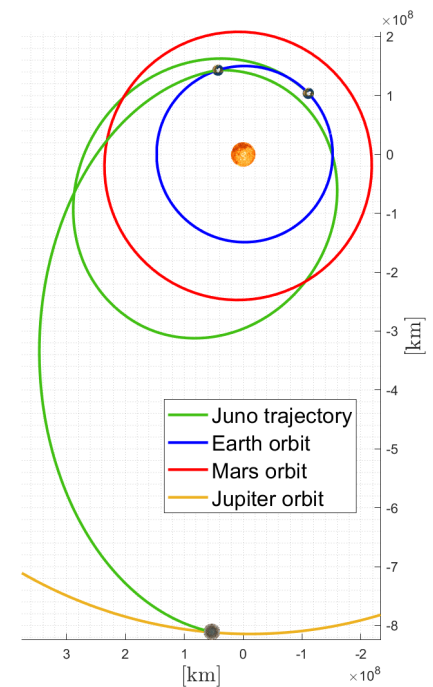


Figure 1.4: Juno's trajectory from ecliptic north pole

1.8.2 Jupiter approach and insertion

After the flyby, Juno spent 791 days on its last interplanetary leg in which no significant maneuvers nor scientific operations were conducted. Jupiter approach lasted a further 178 days, during which calibration, validation of the on board instruments and telecommunications checks were accomplished. Initial science observations of Jupiter's distant environment were also performed.

JOI burn was made at the closest approach to Jupiter: this moment is called PJ-0, indicating the first passage at the perijove of Juno. The targeted point for this maneuver is at an altitude of 4200 km, calculated above the 1-bar level of Jupiter. The spacecraft is left on a highly elliptical 53-days period around Jupiter with an inclination of 90° ($\pm 10^\circ$). Additional clean-up maneuvers were planned to correct the trajectory. The attitude during JOI phase, as the

spacecraft was slowing down, was such that the HGA was not pointing Earth, constraining communications to low tones, only meant to send information about the completion or failure of the events. After 50 hours from PJ0 all instruments were successfully powered up and started to perform nominal science operations.

1.8.3 Science operations and extended mission

The nominal science orbit, with a period of 14-days, had to be achieved via a PRM at PJ-02. This orbit had been chosen for many reasons:

- it allowed to avoid Jupiter's strongest radiation belts
- enabled near Sun pointing to generate enough electrical power and granted Earth communications via HGA
- it provided the closest possible approach of the instruments to Jupiter's clouds
- it allowed, thanks to Jupiter's oblateness, to scan the whole planet with only 32 orbits obtaining a resolution of 11.25°.

During science operations, two types of orbits should have been performed, differing in terms of spacecraft orientation: MWR passes, which required nadir pointing of Juno's spin plane in order to let the radiometers scan directly the planet, and GSOs, designed to align HGA with Earth.

However, due to a malfunctioning of an helium tank valve, Juno entered Safe Mode for 13.5 hours and PRW was discarded. This change showed the robustness of the designed capture orbit. It was in fact possible to conduct science operations on this longer path with only minor changes: the disposal of the spacecraft had to be moved from 2017 to 2021 to allow the completion of the 35 orbits. Moreover, the 53-days orbit required a slight plane change (from 90° to 105°) between PJ-22 and PJ-23 to avoid a solar eclipse since the batteries are only suited for the 19 minutes eclipse during the Earth fly-by.

The so conducted mission was scheduled to end on July 2021 but the conditions of the spacecraft and the remaining fuel on board allowed to extend the mission by other 42 orbits for 5 more years of mission. During the nominal phases, the PJ had been shifted northwards, so during the extended phase a series of close passes of Jupiter's north polar cyclones occurred. Furthermore, flybys of Ganymede, Io and Europa are performed in addition to an analysis of the faint rings of the observed planet.^[1]



Figure 1.5: Orbits around Jupiter

1.8.4 Mission disposal

Under the planetary protection requirements, Juno is designed to de-orbit itself after the extended mission succeeds. The dose of radiations absorbed during the lifetime of the spacecraft won't allow for safe operations. The de-orbit maneuver is supposed to begin with an apocentre burn, slowing down Juno by 75 m/s, enough to lower its perijove in the atmosphere of Jupiter. The dense gas layers will cause the spacecraft to disintegrate.

De-orbiting the spacecraft, now planned in 2025, will eliminate the possibility of contamination of Jupiter and its Moons' environment, especially to avoid unreliable results from the planned ESA Juice mission, expected to enter Jupiter's orbit in 2031.^{[12][13]}

Bibliography

- [1] Jet Propulsion Laboratory. *Juno Mission to Jupiter*. Site: <https://www.nasa.gov/>. 2022.
- [2] Richard Grammier. *Overview of the Juno Mission to Jupiter*. Site: <https://www.jpl.nasa.gov/missions/juno>. 2006.
- [3] Various. *Mission Juno - Great documentary on Jupiter and NASA's Juno probe*. Website. Site: <https://www.youtube.com/watch?v=ka60ERznXh4>. 2013.
- [4] Richard Grammier. "An overview of the Juno mission Jupiter". In: (2006).
- [5] S.J. Bolton J. Lunine D. Stevenson J.E.P. Connerney S. Levin T.C. Owen F. Bagenal D. Gautier A.P. Ingersoll G.S. Orton T. Guillot W. Hubbard. J. Bloxham A. Coradini S.K. Stephen P. Mokashi R. Thorne R. Thorpe. "The Juno mission". In: (2015).
- [6] *Advanced Global Optimisation Tools for Mission Analysis and Design*. NASA press kit. Site: https://www.jpl.nasa.gov/news/press_kits/JunoLaunch.pdf. 2011.
- [7] Chuck E. Rasbach Randy Dodge Mark A. Boyles. "Key and Driving Requirements for the Juno Payload Suite of Instruments". In: (2012).
- [8] Stephen F Dawson Paul Stella William McAlpine Brian Smith. *Juno Photovoltaic Power at Jupiter*. Site: <https://ntrs.nasa.gov/citations/20130010565>. 2012.
- [9] Various. *Spacecraft Information*. Website. Site: <https://spaceflight101.com/juno/spacecraft-information/>. 2024.
- [10] Installing Juno's radiation vault. *Radiation vault characteristics*. Website. Site: <https://www.nasa.gov/image-article/installing-junos-radiation-vault/>. 2024.
- [11] Connerney et al. *A New Model of Jupiter's Magnetic Field from Juno's First Nine Orbits*. Journal of Geophysical Research: Planet. Site: <https://agupubs.onlinelibrary.wiley.com/doi/10.1002/2018GL077312>. 2018.
- [12] NASA Jet Propulsion Laboratory. *NASA online press kit*. Website. Site: https://www.jpl.nasa.gov/news/press_kits/juno/. 2024.
- [13] NASA Jet Propulsion Laboratory. *NASA's Juno Mission Expands Into the Future*. Website. Site: <https://www.jpl.nasa.gov/news/nasas-juno-mission-expands-into-the-future>. 2024.
- [14] Various. *Juno Mission and Trajectory Design*. Website. Site: <https://spaceflight101.com/juno/juno-mission-trajectory-design/>. 2024.
- [15] NASA Horizons. *Ephemerides Data*. Website. Site: <https://ssd.jpl.nasa.gov/horizons/>. 2024.

Homework 2

Notation

Acronym	Description	Acronym	Description
Acronym	Description	Acronym	Description

2.1 Mission analysis and ΔV budget

2.1.1 Rationale of the mission analysis

The mission analysis previously described could be split into two macro-categories:

- From launch to the interplanetary transfer, including DSMs and the Earth fly-by;
- Planetary phase around Jupiter.

The main objectives of the mission analysis were to keep the overall launch energy C_3 and deterministic ΔV as low as possible, compliant with the constraints imposed by the navigation and spacecraft operational requirements. Regarding the interplanetary transfer, two main options were available, both including an EGA. The first option, named as "2 - $dVEGA$ ", contemplated a launch window timeframe in October-November 2011. However, the latter was discarded since the approach angle at Jupiter would have resulted in a latitude farther away from the equator. This would have brought to higher radiation levels, hence a reduced time available for the science operations^[1]. The second option, named as "2 + $dVEGA$ ", contemplated a launch window timeframe in August 2011 and it ended up being the chosen one. A viable back-up of this transfer would have happened in October 2012, since the basic features of "2 + $dVEGA$ " repeat every 13 months. Regarding the interplanetary trajectory constraints, they could be divided into three categories:

- **Launch energy C_3 and timing constraints.** Fixing an initial value for the energy provided by the launcher, different possibilities of departure date could be analyzed. Every launch date defined a trajectory that was characterized by a required C_3 and deterministic ΔV . The maximum $C_3 = 31.1 km^2/s^2$ was defined by the Atlas V551 launcher^[2]. Analyzing Juno's ephemerides for the actual launch date, the calculated value is $C_3 = 31.08 km^2/s^2$. The trajectory reconstructed through the optimization problem and explained (subsec), revealed a value of $C_3 = 29.34 km^2/s^2$, with departure date on 18/08/2011. Restricting the launch window domain around 05/08/2011 (the actual one) the value is $C_3 = 30.40 km^2/s^2$. In the non-restricted window for departure, the trend of the decreasing C_3 over time can be evaluated in the work of Kowalkowski and Lam^[1].
- **Interplanetary events** The milestones of this phase were DSMs and EGA. The fly-by was constrained to happen at a fixed altitude of 800km well above ISS, but it could be lowered up to 500km. This last decrease on the altitude value could have improved the robustness of the trajectory in the case of eventual delays in DSMs, decreasing also the ΔV of the mission and the final radiation at Jupiter arrival^[3]. However, the most challenging task was the selection of the DSM dates, in fact this choice would have affected the required launch C_3 and overall mission ΔV ^[1]. Moreover, DSM maneuver required to be split into two equally lasting burns, separated by 2 days. This was required by engine capabilities, described in (autoref). As precaution, due to anomalous pressure and temperature values of the oxidizer feeding line during DSM1, the two maneuvers ended up being performed two weeks apart. An additional problem arose from the 2+ $dVEGA$ interplanetary structure and the needs to perform the DSM at aphelion and have real-time visibility. This constraint was set up by imposing a SEP angle greater than 10° for acquisition of data, and SEP angle greater than 3° for execution of the maneuver. This difference was due to the need of seven days to plan the maneuver on ground after the necessary two days of data collection. In the eventuality of a burn before solar conjunction, an adequate time to re-try failed attempts was considered. In addition, another constraint regarding telecommunications and navigation was due to the positioning of the toroidal antenna (LGA), used for ground link in the early phases. To ensure a good signal with this antenna, the ELA was constrained to be within $\pm 10^\circ$ around 90° . Furthermore, since Doppler data is of very little value when ELA is too close to 90° the combined range for the ELA resulted to be of $80^\circ - 87^\circ$ and $93^\circ - 100^\circ$.
- **Jupiter arrival timing and geometry** Jupiter arrival and insertion was constrained by multiple aspects. First of all, since a direct injection into the science orbit would have been too expensive, the burn was split into two maneuvers (JOI and PRM), saving over 170 m/s^[1] related to gravity losses. Furthermore, in order to avoid longitudes at which the magnetic field is stronger, JOI and PRM dates had to be accurately selected. In addition, due to the critical nature of JOI, the maneuver had to take place during the overlapping coverage of two DSN complexes. Since the longest one was provided by Goldstone-Canberra, the burn and pre-burn events had to happen during that timeframe. As far as PRM was concerned, dual DSN coverage was not required. However, the optimal date for PRM could be selected in order to minimize the overall ΔV and to maneuver at lower magnetic field longitudes. Lastly, the perijove was bounded to be at distances higher than 4500km over the 1 bar pressure level of the atmosphere, allowing to operate in the hole of the torus that describes the highest radiation levels.

2.1.2 Simulation of the interplanetary trajectory

To reconstruct the interplanetary phase, a simulation was set up in *Matlab*. The implemented model considered three heliocentric legs, linked with the patched-conics method:

- From Earth to DSM position.
- From DSM position to fly-by at Earth.
- From fly-by position to Jupiter.


In order to minimize the total ΔV of the mission, a cost function was defined. This is determined by the sum of four contributions:

- $\Delta V_{inj,E}$: injection from Earth heliocentric orbit to the first interplanetary leg
- ΔV_{dsm} : deep space maneuver
- ΔV_{fb} : burn maneuver at Earth's fly-by hyperbola pericentre
- $\Delta V_{inj,J}$: injection into Jupiter's heliocentric orbit

The calculation were based assuming analytical ephemerides for the planets and the Lambert's method was used to design the paths. The implementation was constrained by various inputs, according to the development of the mission:

- Earth departure date, defined in the interval from 05/08/2011 to 26/08/2011
- DSMs condensed in one impulsive burn
- DSM date, from 20/08/2012 to 10/09/2012
- DSM position domain constrained by means of keplerian parameters from the real mission ephemerides
- Fly-by date, from 20/09/2013 to 20/10/2013
- Fly-by altitude, of at least 500 km
- Jupiter arrival date, from 20/06/2016 to 10/07/2016

Then a genetic algorithm was used to minimize the cost function and the match between the calculations and Juno ephemerides was verified as shown in Figure 2.6.

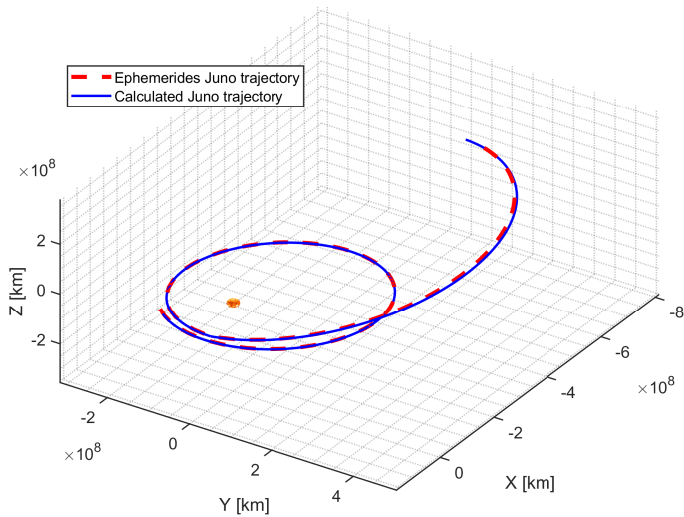

	ΔV [km/s]	Date
INJ_E	5.3920	14/08/2011
DSM	0.7225	29/08/2012
FB	$1.9872 \cdot 10^{-7}$	08/10/2013
INJ_J	5.4552	09/07/2016

Table 2.3: Calculated solution

Figure 2.6: Comparison of trajectories

The obtained results are coherent with the actual mission data^[4]. Regarding Table 2.3, some values might seem particularly high in relation to the main engine capabilities. Indeed, not all of the ΔV s had to be performed by the main engine:

- $\Delta V_{inj,E}$ was executed by the upper stage of the Atlas V551, in the limits of the launcher performance C_3 .
- $\Delta V_{inj,J}$ was due to the rendezvous at Jupiter. The only burn required to enter an elliptical orbit had to be given at the pericentre of the hyperbola. The impulsive ΔV can be calculated as follows, considering $e_{cap} = 0.9884$ and r_p in relation to the designed 107-day orbit:

$$\Delta V_{JOI} = v_{\infty} \left(\sqrt{1 + \frac{2\mu_J}{r_p v_{\infty}^2}} - \sqrt{\frac{\mu_J(1 + e_{cap})}{r_p v_{\infty}^2}} \right) = 0. \text{ km/s} \quad (2.1)$$

Moreover, the low ΔV_{fb} value in Table 2.3 indicates that gravity assist was not powered. Clean-up maneuver and TCMs were performed before and after the fly-by, hence this small burn.

[5]

2.2 Propulsion system architecture

2.3 Reverse engineering of propulsion system

Bibliography

- [1] Try Lam Theres D. Kowalkowski. "Launch Period Development for the Juno Mission to Jupiter". In: (2008).
- [2] United Launch Alliance. *Atlas V Juno*. Site: <https://www.google.com/url?sa=t>. 2011.
- [3] Rick Nybakken. "The Juno Mission to Jupiter: A pre-launch update". In: (2011).
- [4] Paul F. Thompson et al. "Juno navigation for Jupiter orbit insertion". In: (2017).
- [5] Jet Propulsion Laboratory. *Juno Mission to Jupiter*. Site: <https://www.nasa.gov/>. 2022.