# DAD324

**Automatic Dicing Saw**

Print Manual Downloads

› FAQ

## Φ6-inch Compact Dicing Saw which Achieves World's Smallest Footprint while Improving Functionality

Φ150 mm Single spindle




### Support for a variety of applications from semiconductor wafers to electronic parts

DAD324 is a single-axis dicing saw which is compatible with workpieces up to Φ6 inches with a 2.0 kW high-torque spindle. 150 x 150 mm workpieces can be processed using a user-specified specification.

### High productivity

Software operation speed and response speed are improved through adoption of a high performance MCU. The axis speed is accelerated and throughput is improved by adopting servo motors for all axes. In addition, this model uses PC electric components as standard and supports communication control as an option. The high-speed NCS (Non-Contact Setup) reduces measurement time.

| | Current(DAD322) | DAD324 |
|---|---|---|
| X-axis | 500 | 800 |
| Y-axis | 150 | 200 |
| Z-axis | 30 | 80 |

mm/s

**World's smallest footprint***


Compact design with a width of 490 mm

the reduced profile contributes towards a large increase in terms of productivity per unit area, especially when multiple.


* Investigated internally

**Ease of operation**


- XIS (Extended Interface System)
  Operation buttons are consolidated on the microscope screen.
- Wafer mapping
  The processing status is displayed visually in the same way as fully automatic equipment.
- Log viewer
  Analog data is displayed in a graph and equipment data is more easily visualized.
- Help viewer
  Troubleshooting is displayed when an error occurs to achieve quick and accurate recovery support.
- Automatic alignment
- Autofocus
- Automatic kerf check

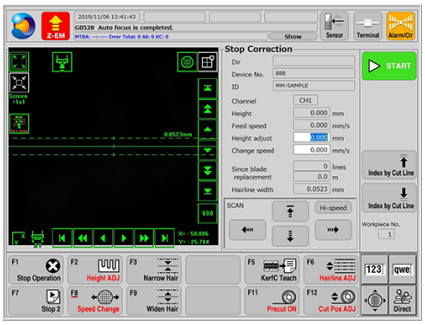


XIS

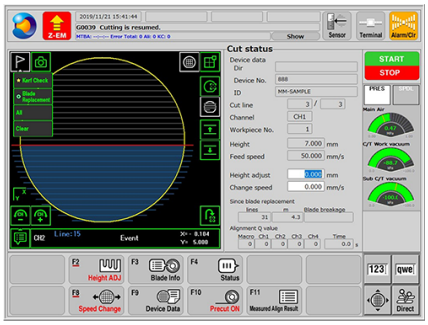


Wafer mapping

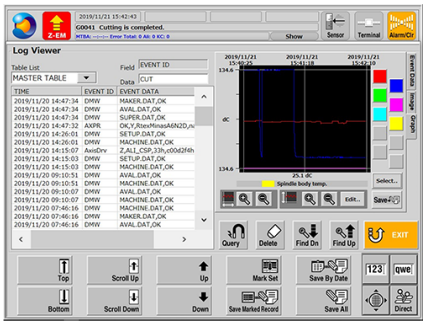


Log viewer




Help viewer

## Specifications

| Specification | | Unit | |
|---|---|---|---|
| Max. workpiece size | | - | Φ6 inch/150 × 150 mm (user-specified specification) |
| X-axis | Cutting range | mm | 160 |
| | Cutting speed | mm/s | 0.1 - 800 |
| Y-axis | Cutting range | mm | 162 |
| | Index step | mm | 0.0001 |
| | Index positioning accuracy | mm | 0.005/160<br>(Single error)0.003/5 |
| Z-axis | Max. stroke | mm | 32.2 |
| | Moving resolution | mm | 0.000002(2nm) |
| | Repeatability accuracy | mm | 0.001 |
| θ-axis | Max. rotating angle | deg | 320 |
| Spindle | Rated output | kW | 2.0 at 40,000 $min^{-1}$ |
| | Rated torque | N・m | 0.48 |
| | Rotation speed range | $min^{-1}$ | 3,000 - 40,000 |
| Equipment dimensions (W × D × H) | | mm | 490 × 870 × 1,670 |
| Equipment weight | | kg | Approx. 420 |

*This model supports blades with an outer diameter of 55.56 mm and processing for max. 1.2 mm thick workpieces.
*Product appearance, features, specifications, and other details may change due to technical modifications.
*Please read the standard specification sheet thoroughly before use.

## Product Lineup







| | DAD3221 | DAD3231 | DAD3241 | DAD3350 | DAD3351 |
|---|---|---|---|---|---|
| Machine type | Automatic | Automatic | Automatic | Automatic | Automatic |
| Spindle | 1 | 1 | 1 | 1 | 1 |
| C/T | 1 | 1 | 1 | 1 | 1 |
| Machine dimentions (W × D × H) | 490 × 870 × 1670 | 650 × 950 × 1670 | 650 × 950 × 1670 | 900 × 1050 × 1800 | 880 × 1000 × 1800 |
| Machine weight (kg) | 420 | 550 | 550 | 1200 | 1100 |

# DAD324

**Automatic Dicing Saw**

Print Manual Downloads

› FAQ

## Contact

Please feel free to contact us with any questions or inquiries.

Contact form › Look up a sales office near you ›