DAD3241

Automatic Dicing Saw

Print Manual Downloads

› FAQ

Standard manual dicing saw for Φ8-inch workpieces

Φ200 mm Single spindle



High productivity

Improved throughput through the introduction of servo motors on all axes (X, Y, and Z)

	Existing equipment (DAD3240)	DAD3241
X-axis	600	800
Y-axis	170	200
Z-axis	80	80

mm/s

The index accuracy has been improved by installing a Y-axis scale as a standard specification. In addition, DAD3241 includes software function enhancement, communication control through PC electric component installation, measurement accuracy improvement, and measurement time reduction using the high-speed, high-accuracy NCS (Non-Contact Setup).

Support for large workpieces

Installation of a JIG chuck table makes processing square workpieces up to 8 x 8 inches possible (option).

High processability

Thanks to the high-output 1.8 kW spindle, the DAD3241 can handle difficult-to-cut materials from silicon to ceramics.

Compact manual dicing saw


The DAD3241 is a distinctly compact manual dicing saw with support for Φ8-inch workpieces at a width of only 650 mm.

High maintainability


Built-in microscope with a lens shutter and scope blow function reduces maintenance frequency, which increases the utilization rate.

Ease of operation


- XIS(Extended Interface System)
  Operation buttons are consolidated on the microscope screen.
- Wafer mapping
  The processing status is displayed visually in the same way as fully automatic equipment.
- Log viewer
  Analog data is displayed in a graph and equipment data is more easily visualized.
- Help viewer
  Troubleshooting is displayed when an error occurs to achieve quick and accurate recovery support.

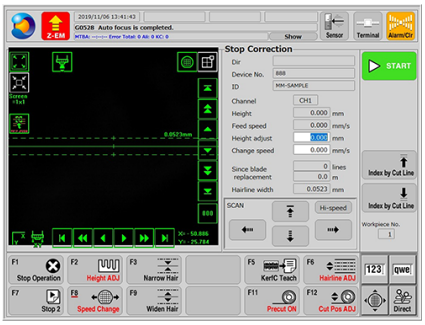

XIS

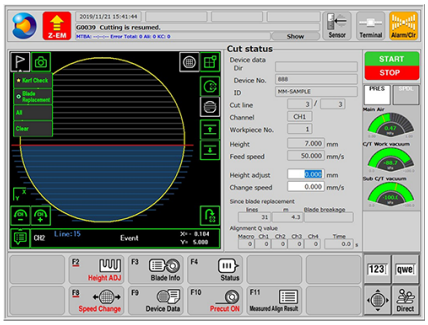

Wafer mapping

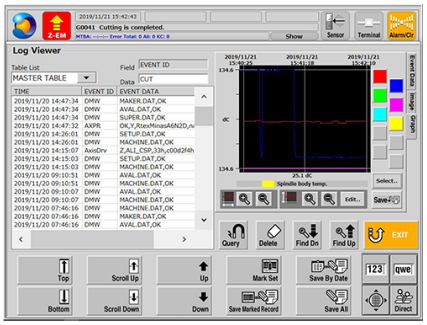

Log viewer



Help viewer

Specifications

Specification		Unit	
Max. workpiece size		-	Φ8 inch (200 mm × 200 mm user-specified specification)
X-axis	Cutting range	mm	210
	Cutting speed	mm/s	0.1～800
Y-axis	Cutting range	mm	210
	Index step	mm	0.0001
	Index positioning accuracy	mm	0.002/210 (Single error) 0.002/5
Z-axis	Max. stroke	mm	32.2
	Moving resolution	mm	0.000002
	Repeatability accuracy	mm	0.001
θ-axis	Max. rotating angle	deg	320
Spindle	Rated output	kW	1.8 at 60,000 min^{-1}
	Rated torque	N・m	0.29
	Rotation speed range	min^{-1}	6,000 ～ 60,000
Equipment dimensions(W×D×H)		mm	650 × 950 × 1,670
Equipment weight		kg	Approx.550

*Product appearance, features, specifications, and other details may change due to technical modifications.
*Please read the standard specification sheet thoroughly before use.

Product Lineup







	DAD324	DAD3221	DAD3231	DAD3350	DAD3351
Machine type	Automatic	Automatic	Automatic	Automatic	Automatic
Spindle	1	1	1	1	1
C/T	1	1	1	1	1
Machine dimentions (W × D × H)	490 × 870 × 1670	490 × 870 × 1670	650 × 950 × 1670	900 × 1050 × 1800	880 × 1000 × 1800
Machine weight (kg)	420	420	550	1200	1100

DAD3241

Automatic Dicing Saw

Print Manual Downloads

› FAQ

Contact

Please feel free to contact us with any questions or inquiries.

Contact form › Look up a sales office near you ›