DAD3350

Automatic Dicing Saw

Print Manual Downloads

› FAQ

Flexibility for diverse processing needs

Φ200 mm Single spindle



Supports a wide range of applications

DAD3350 is capable of handling a maximum of Φ8-inch or 250 x 250 mm workpieces (user-specified specification). A 1.8 kW spindle is equipped as standard. By selecting a 2.2 kW high-torque spindle (optional), it is possible to process silicon up to difficult-to-process materials, such as ceramic. Support for blades of up to Φ5 inches is possible with user-specified specifications. In addition, the alignment function for multiple-mounted workpieces can also be added as an option.

Improved throughput


The DAD3350 achieves improvement in throughput by increasing the speed of each axis.

Ease of use

Operability is improved with installation of an LCD touch screen and Graphical User Interface (GUI). Easy operation is achieved with a visual display showing processing conditions and various statuses with icon buttons. In addition, operation commonalities were considered in order to achieve easy replacement from the 300/500 series (existing models).

Process quality

By adopting a high-rigidity bridge-type frame and a spindle front-section support structure, which prevents heat shrinkage and vibration, a more stable processing point can be achieved.

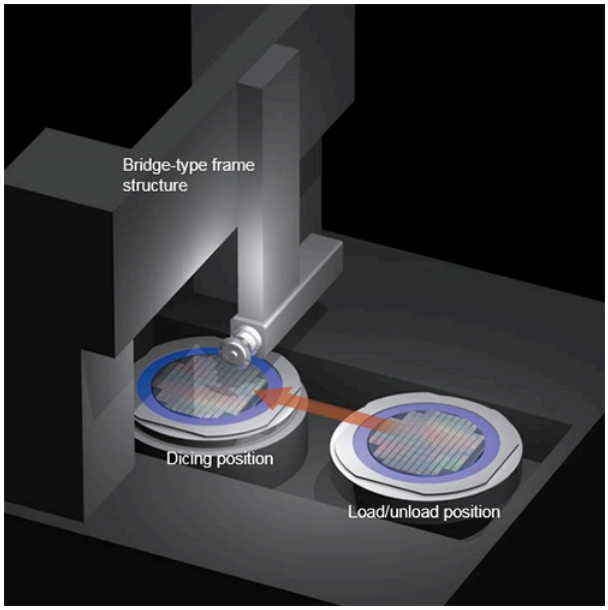

Process controls

Auto alignment, auto focus, auto kerf check, and other image recognition functions have been installed to improve equipment productivity. In addition, the microscope includes an air blow mechanism and a lens shutter to prevent contamination. As an option, a low magnification microscope can be added for rough

alignment. Through condition monitoring the processing conditions and various other statuses can be known at any given time. Advanced process control features can be added as options, including an on-screen cutting water management system for cutting water flow control.

Specifications

Specification		Unit	1.8 kW	2.2 kW
Max. workpiece size		-	Φ8 inch (250 mm × 250 mm, Φ300 mm user-specified specification)	
X-axis	Cutting range	mm	260	
	Cutting speed	mm/s	0.1 ~ 600	
Y-axis	Cutting range	mm	260	
	Index step	mm	0.0001	
	Index positioning accuracy	mm	0.002/260 (Single error) 0.002/5	
Z-axis	Max. stroke	mm	32.2	31.4
	Moving resolution	mm	0.00005	
	Repeatability accuracy	mm	0.001	
θ-axis	Max. rotating angle	deg	380	
Spindle	Rated torque	N・m	0.29	0.70
	Rotation speed range	min^{-1}	6,000 ~ 60,000	3,000 ~ 30,000
Equipment dimensions(W×D×H)		mm	900 × 1,050 × 1,800	
Equipment weight		kg	Approx. 1,200	

*Product appearance, features, specifications, and other details may change due to technical modifications.
*Please read the standard specification sheet thoroughly before use.

Product Lineup







	DAD324	DAD3221	DAD3231	DAD3241	DAD3351
Machine type	Automatic	Automatic	Automatic	Automatic	Automatic
Spindle	1	1	1	1	1
C/T	1	1	1	1	1
Machine dimentions (W × D × H)	490 × 870 × 1670	490 × 870 × 1670	650 × 950 × 1670	650 × 950 × 1670	880 × 1000 × 1800
Machine weight (kg)	420	420	550	550	1100

DAD3350

Automatic Dicing Saw

Print Manual Downloads

› FAQ

Contact

Please feel free to contact us with any questions or inquiries.

Contact form › Look up a sales office near you ›