DAD3351

Automatic Dicing Saw

Print Manual Downloads

› FAQ

Highly expandability to support various processing needs

Φ200 mm Single spindle



Supports a wide range of applications

DAD3351 is a semi automatic dicing saw compatible with Φ8-inch workpieces. Includes a high output 1.8 kW spindle as standard. Also, using a high torque, high rigidity 2.2 kW spindle (optional), difficult-to-process materials including silicon and ceramics can be processed. Through a user-specified specification, blades up to Φ5 inches can be used for processing. As a result, it is possible to process workpieces with thicknesses of 10 mm or more. Supports blades up to Φ5 inches with user-specified specification. In addition, the multi-alignment function is available as an option.

Stable processing quality


Adopted high bridge-type frame structure and moved the spindle support structure forward to minimize the effects of thermal expansion and vibration, providing a more stable processing point. In addition, a spindle temperature sensor was installed for temperature monitoring.

Processing Time Reduction

Processing time is decreased up to 5% compared to the existing equipment through axis-speed improvement by adopting servo motors for all axes and optimizing the control parameters.

Improved functions and operation

The high-speed, high-accuracy NCS (Non-Contact Setup, optional) reduces blade height measurement time for the processing table by 74%. Further processing quality stabilization is achieved through improved measurement accuracy. In addition, the visibility during kerf check was improved by enabling microscope ring light three-channel switching. This model supports SECS/GEM.

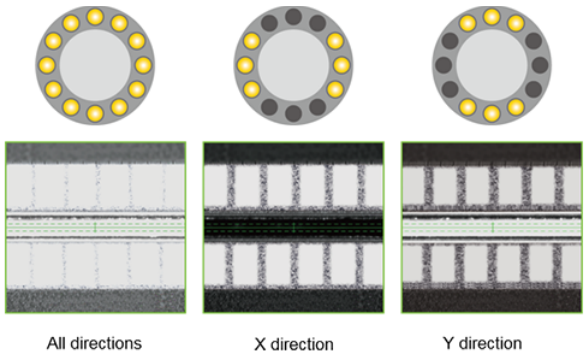


Ring light three-channel switching specification


Easy operation

- XIS (Extended Interface System)
  Operation buttons consolidated on microscope screens
- Wafer mapping
  Graphic processing condition display similar to full automation equipment
- Log viewer
  Graphic analog data display and equipment data visualization


- Help viewer
  Displays instructions when error occurs for quick, accurate recovery.

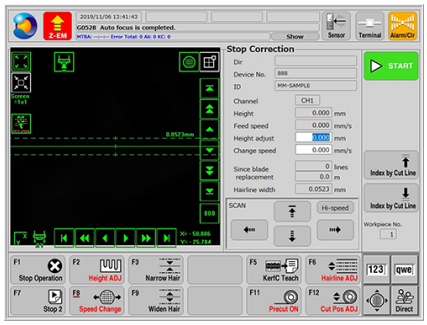

XIS

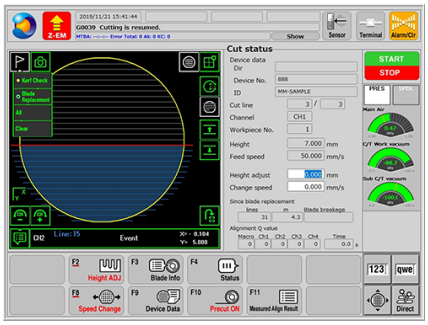

Wafer mapping

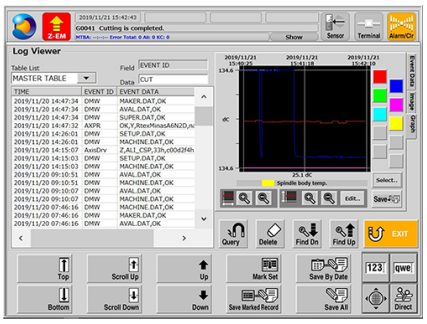

Log viewer



Help viewer

High maintainability

- Enhancement of Dust Prevention Performance on X-, Y-, and Z-axes.
  Effective for materials including ceramics where contamination is likely to damage the shaft.

Specifications

Specification		Unit	1.8 kW	2.2 kW (Option)	2.2 kW (Option) (High torque)
Max. workpiece size		-	Φ8 inch (250 mm × 250 mm user-specified specification)		
X axis	Cutting range	mm	260		
	Cutting speed	mm/s	0.1 ~ 1,000		
Y-axis	Cutting range	mm	260		
	Index step	mm	0.0001		
	Index positioning accuracy	mm	0.002/260 (Single error) 0.002/5		
Z-axis	Max. stroke	mm	31.2	31.4	
	Moving resolution	mm	0.0000002 (0.2 nm)		
	Repeatability accuracy	mm	0.001		
θ-axis	Max. rotating angle	deg	320 Θ axis rotation specification 380°(option):382.5		
Spindle	Rated output		1.8 at 60,000 min^{-1}	2.2 at 30,000 min^{-1}	2.2 at 15,000 min^{-1}
	Rated torque	N・m	0.29	0.7	1.4
	Rotation speed range	min^{-1}	6,000 ~ 60,000	3,000 ~ 30,000	3,000 ~ 15,000
Equipment dimensions(W×D×H)		mm	880 × 1,000 × 1,800		
Equipment weight		kg	Approx. 1,100		

*Product appearance, features, specifications, and other details may change due to technical modifications.
*Please read the standard specification sheet thoroughly before use.

Product Lineup







	DAD324	DAD3221	DAD3231	DAD3241	DAD3350
Machine type	Automatic	Automatic	Automatic	Automatic	Automatic
Spindle	1	1	1	1	1
C/T	1	1	1	1	1
Machine dimentions (W × D × H)	490 × 870 × 1670	490 × 870 × 1670	650 × 950 × 1670	650 × 950 × 1670	900 × 1050 × 1800
Machine weight (kg)	420	420	550	550	1200

DAD3351

Automatic Dicing Saw

Print Manual Downloads

› FAQ

Contact

Please feel free to contact us with any questions or inquiries.

Contact form › Look up a sales office near you ›