DFD6361

Fully Automatic Dicing Saw

Print Manual Downloads

› FAQ

Advanced performance for Φ300 mm dicing

Φ300 mm Facing dual spindle DBG



Enhanced dicing throughput


The DFD6361 enhances throughput in two distinct ways. DISCO's facing dual design and a reduction in distance between the blades help to control total cut time, while high-magnification microscopes (standard) and non-contact setup sensors (option) for both Z1 and Z2 reduce the time required for non-dicing sequences, such as kerf check and blade setup.

Consistent cut quality

DFD6361 offers highly consistent and dependable cut quality through the new Synchro Spindle™ featuring superior radial rigidity. An atomizing nozzle cleaning mechanism can also be installed in the spinner unit as an option to effectively clean wafers after dicing.

Improved usability

Auto-open/close wheel cover and spindle shaft-lock feature make blade replacement quick and easy. In addition, the condition monitor relays processing status and key equipment information in real time. DFD6361 also has a cutting water flow rate control feature, making it possible to manage the flow rate on the screen. An adjustable LCD touch screen with GUI (Graphical User Interface) have also been adopted.

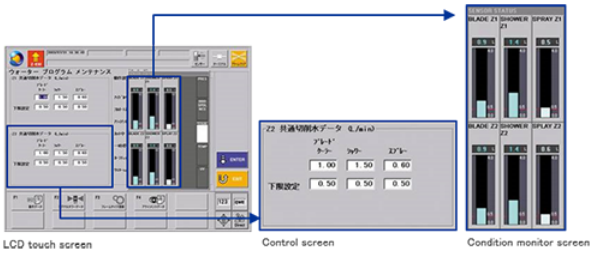

Small footprint


The bridge-type frame structure and improved wafer handling system contribute to the compact size and small footprint of the DFD6361.

Spindle lineup

The 1.2 kW spindle (standard) features superior rigidity. A center thrust design gives the 1.8 kW spindle (option, uses 2 ” blades) and the 2.2 kW spindle (option, uses 3 ” blades) extra rigidity for processing glass, ceramics, and other high processing load materials.

DFD6340 Operation flow

1. Frame pick arm moves the workpiece from the cassette to the pre-alignment stage →
2. After centering on the pre-alignment stage, the lower arm moves the workpiece to the chuck table → **cutting** →
3. Upper arm moves the workpiece to the spinner table → **cleaning and drying** →
4. Lower arm moves the workpiece to the pre-alignment stage →
5. Frame pick arm returns the workpiece to the cassette

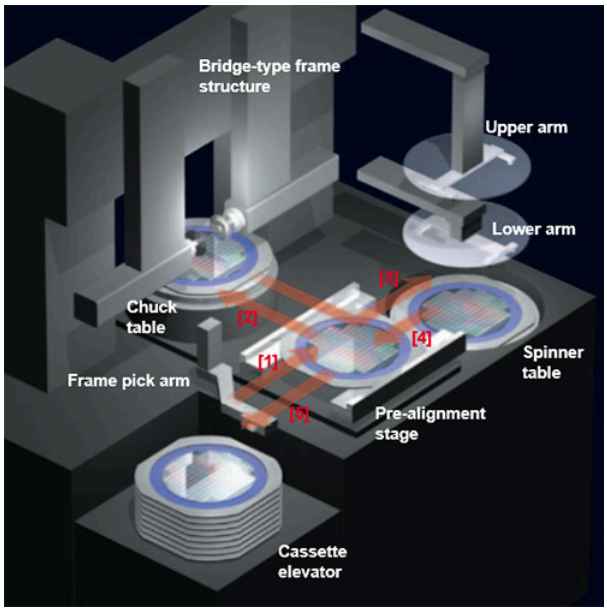

Specifications

Specification		Unit	1.2, 1.8 kW	2.2 kW
Max. workpiece size		mm	Φ300	
X-axis	Cutting range	mm	310	
	Cutting speed	mm/s	0.1 ~ 600	
Y1・Y2-axis	Cutting range	mm	310	
	Index step	mm	0.0001	
	Positioning accuracy	mm	Within 0.002/310 (Single error) Within 0.002/5	
Z-axis	Max. stroke	mm	14.7 (For Φ2 inch blade)	14.9 (For Φ3 inch blade)
	Moving resolution	mm	0.00005	
	Repeatability accuracy	mm	0.001	
θ-axis	Max. rotating angle	deg	380	
Spindle	Rated torque	N・m	0.19 (1.2 kW) 0.29 (1.8 kW)	0.7
	Rotation speed range	min^{-1}	6,000 ~ 60,000	3,000 ~ 30,000
Equipment dimensions(W×D×H)		mm	1,200 × 1,550 × 1,800	
Equipment weight		kg	Approx. 2,050	

*Product appearance, features, specifications, and other details may change due to technical modifications.
*Please read the standard specification sheet thoroughly before use.

Product Lineup







	DFD6240	DFD6340	DFD6341	DFD6342	DFD6362
Machine type	Fully Automatic	Fully Automatic	Fully Automatic	Fully Automatic	Fully Automatic
Spindle	1	2	2	2	2
C/T	1	1	1	1	1
Machine dimentions (W × D × H)	900 × 1190 × 1800	1180 × 1110 × 1850	1180 × 1080 × 1820	1180 × 1080 × 1800	1200 × 1550 × 1800 1
Machine weight (kg)	1200	1600	1500	1240	2050

DFD6361

Fully Automatic Dicing Saw

Print Manual Downloads

› FAQ

Contact

Please feel free to contact us with any questions or inquiries.

Contact form › Look up a sales office near you ›