DFD6560

Fully Automatic Dicing Saw

Print Manual Downloads

› FAQ

A space-saving solution for Φ300 mm dicing

Φ300 mm Facing dual spindle



16% reduced footprint

DFD6560 is equipped with uniquely developed short spindles and an optimized bridge-type frame structure resulting in a 16% reduced footprint. All maintenance can be performed from the front of the equipment, thus reducing the area needed for installation and maintenance areas by 20% (compared to the DFD6362). The DFD6560 is particularly ideal when installing multiple adjacent units.

Intuitive operation

The LCD panel allows touch operation of the alignment teach function. Important data, such as the equipment condition and mean time between assists (MTBA) is also displayed on screen, allowing the operator to easily confirm the status of the equipment. Onscreen error recovery assistance is also available.

Improved throughput


A thin wheel cover was adopted and the distance between the blades was reduced, leading to an increase in the number of lines that can be cut simultaneously.Thus cut time is reduced by a maximum of approximately 10 %. (compared to the DFD6362).

Concentrated maintenance area

All operations, from routine to maintenance, can be performed from the front of the equipment. The space reduction achieved in the DFD6560 allows 5 units to be lined up in a space which would only fit 4 units for the DFD6362 at a production facility.


Thorough options for particle prevention

Users can select optional particle prevention measures used in other models, such as the cut section atomizing nozzle and spinner atomizing nozzle. A chuck table water curtain, which prevents particle adhesion caused by wafer drying, is also available.

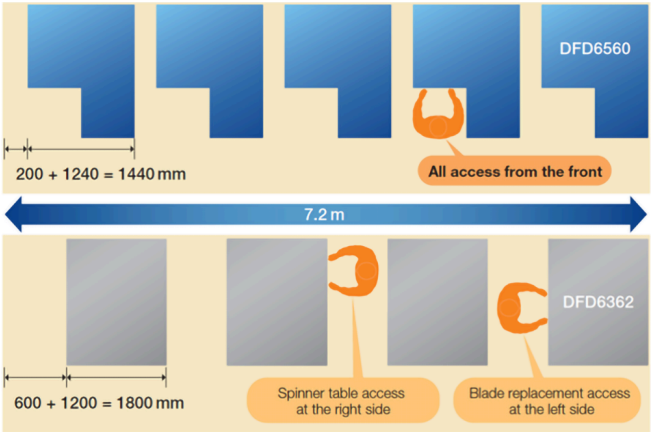

DFD6560 operation flow

1. Push-pull arm moves the workpiece from the cassette to the pre-alignment stage
2. After centering at the pre-alignment stage, the lower arm moves the workpiece to the chuck table.→
3. **Cutting** →
4. Upper arm moves the workpiece to the spinner table →
5. **Cleaning and drying** → Lower arm moves the workpiece to the pre-alignment stage →
6. Push-pull arm returns the workpiece to the cassette.

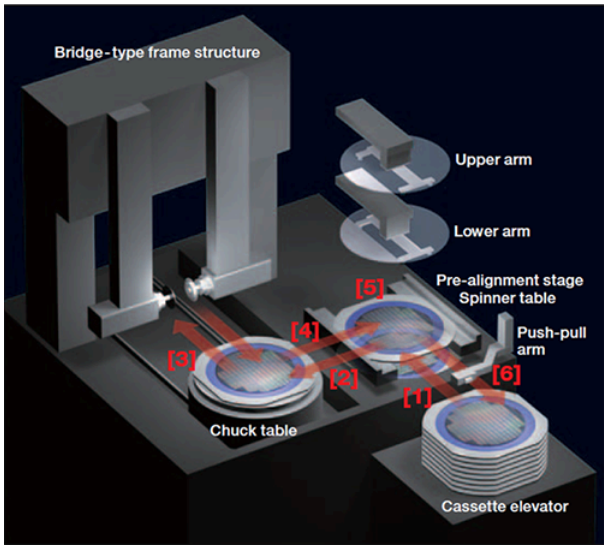

Specifications

Specification		Unit	1.8 kW	High speed (option)
Max. workpiece size		mm	Φ300	
X-axis	Cutting range	mm	310	
	Cutting speed	mm/s	0.1 ~ 1,000	
Y1・Y2-axis	Cutting range	mm	310	
	Index step	mm	0.0001	
	Positioning accuracy	mm	Within 0.002/310 (Single error) Within 0.002/5	
Z-axis	Max. stroke	mm	14.2 (For Φ2 inch blade)	
	Moving resolution	mm	0.00005	
	Repeatability accuracy	mm	0.001	
θ-axis	Max. rotating angle	deg	380	
Spindle	Rated torque	N・m	0.29	0.19
	Rotation speed range	min^{-1}	6,000 ~ 60,000	20,000 ~ 80,000
Equipment dimensions(W×D×H)		mm	1,240 × 1,550 × 1,960	81mm convex (left side)
Equipment weight		kg	Approx. 1,640	

*Product appearance, features, specifications, and other details may change due to technical modifications.
*Please read the standard specification sheet thoroughly before use.

Product Lineup







	DFD6240	DFD6340	DFD6341	DFD6342	DFD6361
Machine type	Fully Automatic	Fully Automatic	Fully Automatic	Fully Automatic	Fully Automatic
Spindle	1	2	2	2	2
C/T	1	1	1	1	1
Machine dimentions (W × D × H)	900 × 1190 × 1800	1180 × 1110 × 1850	1180 × 1080 × 1820	1180 × 1080 × 1800	1200 × 1550 × 1800 1
Machine weight (kg)	1200	1600	1500	1240	2050

DFD6560

Fully Automatic Dicing Saw

Print Manual Downloads

› FAQ

Contact

Please feel free to contact us with any questions or inquiries.

Contact form › Look up a sales office near you ›