IWATSU

NEW

WIDE-BANDWIDTH 30MHz
Advanced AC B-H Analyzer


B-H ANALIZER SY-8264

SY-8264　10Hz～1MHz
○ FREQUENCY OPTION SY-600　1MHz～10MHz
○ FREQUENCY OPTION SY-601　1MHz～20MHz
○ FREQUENCY OPTION SY-602　1MHz～30MHz

- High-Accuracy Magnetic Characterization up to 30MHz
- Phase Measurement Accuracy of ±0.15°　at 10MHz
- Upgradeable Maximum Measurement Frequency (Optional)
- Acquires 26 Measurement Parameters in a Single Measurement



A New Industry Standard
Fully Automated AC Magnetic Property Measurement

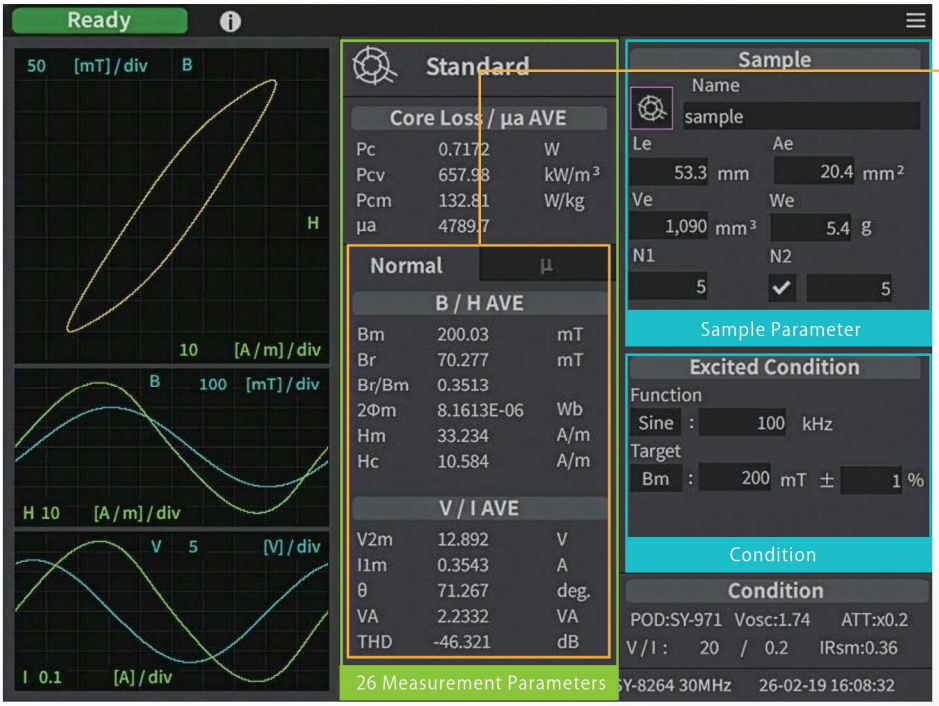




Instant switching of measurement result displays with one click.




Display Parameter

Large, easy-to-read display of up to five selected values from 26 measurement results.

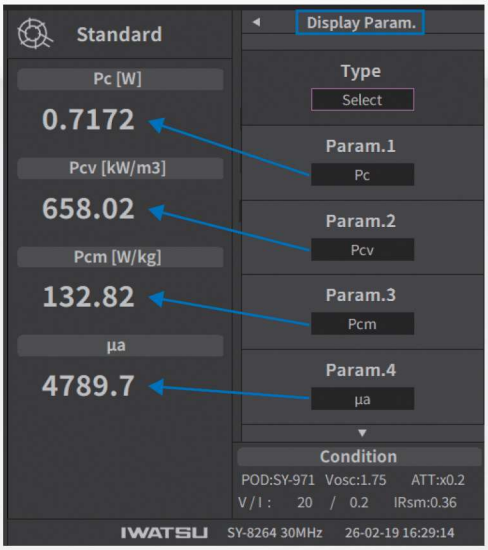

Analysis

Enabling this function allows configuration of the measurement repetition count, interval, and display mode (avg, max, min) per measurement continuous measurement function SY-821 enables measurement of time variation in multiple parameters during continuous operation.

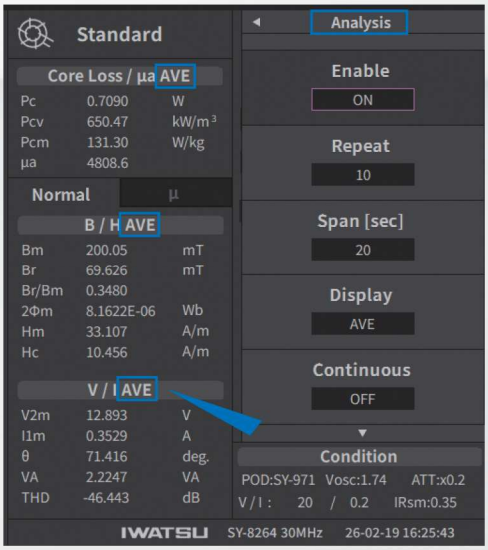

SY-5001



SY-5001 (PMK)

High-Frequency, High-Power Bipolar Power Supply Dedicated to B–H Analyzers

Main Specification

Maximum Frequency：5MHz Maximum Output Current：±6Apeak Maximum Output Voltage：±150Vpeak

Model		SY-5001
Frequency		DC - 5MHz
Gain		1、5、10、30、60±2%（±100ppm/°C）
Output Voltage	Hi-Voltage	±150Vpeak（f<800kHz）
	Lo-Voltage	±64Vpeak（f<2MHz）
Output Current	Hi-Voltage	±5Apeak（f>50Hz）
	Lo-Voltage	±6Apeak（f>50Hz）
Output Impeadance		30mΩ+0.33μH
Dimentions（mm）/ Weight		約 449W×178H×435.5D / 約 19kg

SY-5003（Under development）
30MHz Power Amplifier

Compliant With CROSS-POWER (IEC62044-3)
Accurate core loss measurement

- High-Accuracy Magnetic Characterization from Low Frequencies up to 30MHz
- Phase Measurement Accuracy of ±0.15° at 10MHz
- ±0.30° Phase Accuracy at 30MHz (Single-Coil Method※1, Typical)
- Measurement up to 30MHz with the 2-Coil Method※2 (Accuracy Guaranteed up to 10MHz※3)
- Optional frequency upgrade available at installation or anytime after deployment
- 26 measurement parameters can be acquired in a single measurement.
- A mouse and keyboard can also be used to operate the main unit.
- Flexible analysis settings allow you to define measurement count and interval in a single run.

※1 Method in which only the primary winding is wound around the measurement sample for measurement.
※2 Method in which both the primary and secondary windings are wound around the measurement sample for measurement.
※3 At high frequencies, measurement results can vary greatly depending on the winding configuration.

BH ANARIZER（MAIN UNIT）
SY-8264 10Hz ～ 1MHz
- FREQUENCY OPTION SY-600 1MHz ～ 10MHz
- FREQUENCY OPTION SY-601 1MHz ～ 20MHz
- FREQUENCY OPTION SY-602 1MHz ～ 30MHz





■MEASUREMENT FREQUENCY
10Hz ～ 1MHz （SY-8264）
1MHz ～ 10MHz （SY-600）
1MHz ～ 20MHz （SY-601）
1MHz ～ 30MHz （SY-602）

■WAVE SHAPE
SIN(10Hz ～ 30MHz) / PULSE（10Hz ～ 1MHz）

■MAX CURRENT ±6A
■MAX VOLTAGE ±200V

■EXCITATION METHODxcitation Method
Automatic Excitation
(max magnetic field, max magnetic flux density
,maximum excitation current, maximum induced voltage)

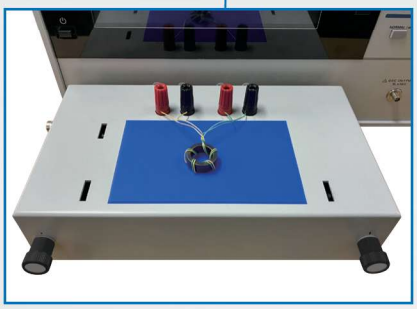

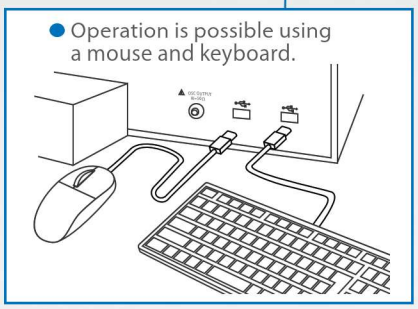

※Residual magnetization is eliminated by applying a decaying alternating magnetic field

Measurement Method		CROSS-POWER Method (IEC62044-3)
Measurement Parameters		Maximum Magnetic Flux Density (Bm), Residual Magnetic Flux Density (Br), Maximum Magnetic Field Strength (Hm), Coercive Force (Hc), Squareness Ratio (Br/Bm), Amplitude Permeability (μa), Core Loss (Pc, Pcv, Pcm), Maximum Excitation Current (I1m), Maximum Induced Voltage (V2m), Phase Angle (θ),Total Magnetic Flux Change (2φm), Apparent Power (VA), Impedance Permeability (μz), Complex Permeability (μ', μ"), Loss Factor (tan δ), Inductance (L), Resistance (R), Impedance (|Z|), Quality Factor (Q), Total Harmonic Distortion (THD)
Measurement graph		B–H , Excitation current, Induced voltage, Magnetic field, magnetic flux density.
Frequency	SIN	10Hz - 1MHz(SY-8264) ※1MHz-30MHz(Option)
	PULSE	10Hz - 1MHz(Duty50%Fixed)
Magnetic Field		Non-inductive resistor voltage drop method (±6 A max.).
Magnetic Flux Density		Induced-voltage detection coil terminal voltage method (±200 V).
Degitizer		Resolution : 16bits (8192points/cycle)
DUT conection		2-Coil or 1-Coil Method
Display		8.4 inch TFT-LCD SVGA 800×600
Mechanical		Weight 11.2kg、Dimentions 420W×266H×450D (mm)
Interface		USB（Strage）、LAN（for remotr control）


Optional maximum measurement frequency upgrade —available at installation or anytime afterward

Frequency Option After Installation of SY-8264

MODEL	Frequency after upgraded
SY-603 10MHz(from 1MHz unit)	1MHz ～ 10MHz
SY-604 20MHz(from 1MHz unit)	1MHz ～ 20MHz
SY-605 30MHz(from 1MHz unit)	1MHz ～ 30MHz
SY-606 20MHz(from 10MHz unit)	10MHz ～ 20MHz
SY-607 30MHz(from 10MHz unit)	10MHz ～ 30MHz
SY-608 30MHz(from 20MHz unit)	20MHz ～ 30MHz

Remote Control Software SY-820 (Dedicated for SY-8264)

- By using the remote control software SY-820, the SY-8264 can be controlled from a PC via LAN, enabling automated measurements.
- Efficient measurements can be performed by setting multiple excitation conditions for a single DUT.
- Future hardware options to be released will also be controllable from SY-820.
- The SY-820 is included as a standard accessory with the SY-8264.

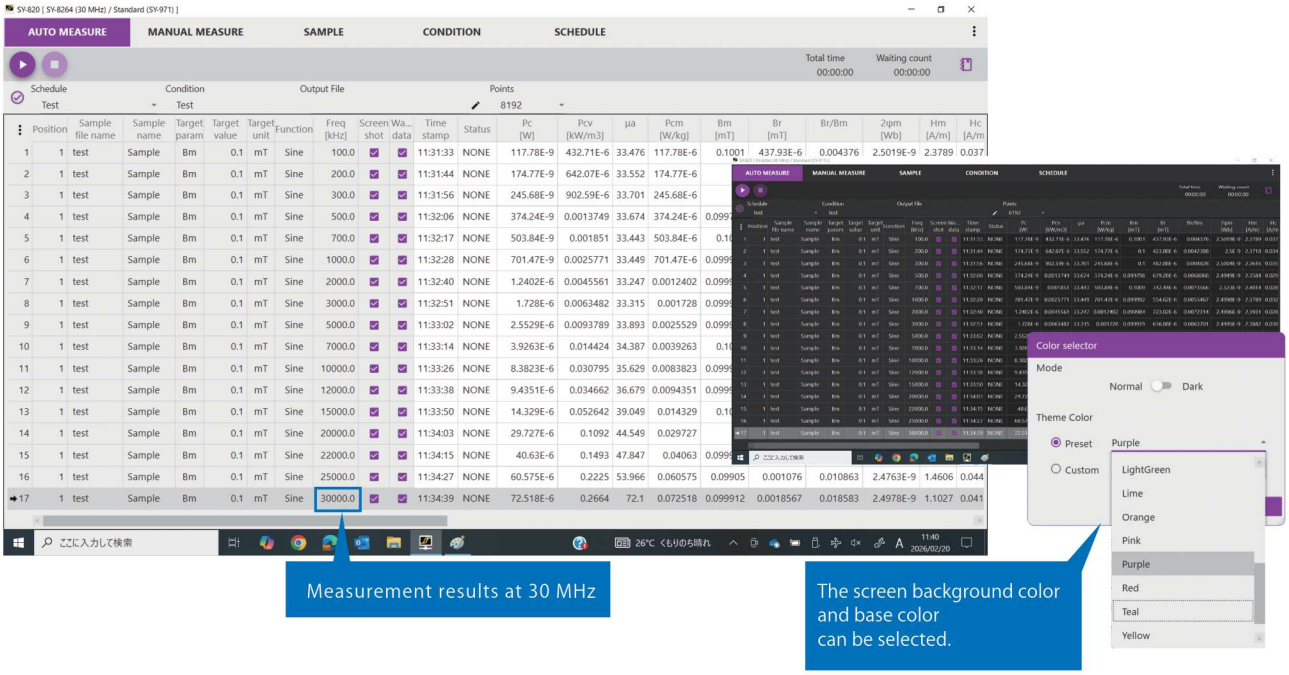

We will support a wide range of options.

New Options

Compatibility with options for the SY-8218/8219 will be expanded progressively. Please consult the SY-8218/8219 catalog for specifications of each option.

SOFTWARE OPTION

Continuous measurements function SY-821 make trend of measurement parameters

Wide-Range THURMAL CHAMBER SCANNER

Compliant with AEC-Q200 Grade 0



SY-330

TEMPERATURE CHAMBER SCANNER SYSTEM



SY-320A / SY-321A

DC BIAS TESTER



AC BLOCKER SY-962
DC BIAS SOURCE SY-961
DC BIAS TESTER SY-960

SHINGLE SHEET MEASUREMENT SYSTEM



SY-956

※The products shown in this catalogue are current models at the date of publication. Design and specification are subject to change without notice for improvement.
※All enterprises including National instruments and Microsoft, etc. and product names mentioned are trademarks or registered trademarks of the respective owners.
※Some of the products are Regulated Products subject to the Foreign Exchange and Foreign Trade Control Law of Japan. Export should not be allowed without appropriate governmental authorization. Please ask our sales office whether the product concerned is a Regulated Product(s).

IWATSU https://www.iwatsu.co.jp/tme/
IWATSU ELECTRIC CO., LTD.
Overseas Sales Sect.
Test & Measurement Sales Dept. Test & Measurement Company
7-41, Kugayama 1-chome, Suginami-ku, Tokyo, 168-8501 Japan
Tel: +81-3-5370-5483 Fax: +81-3-5370-5492

C.S(SX)202603