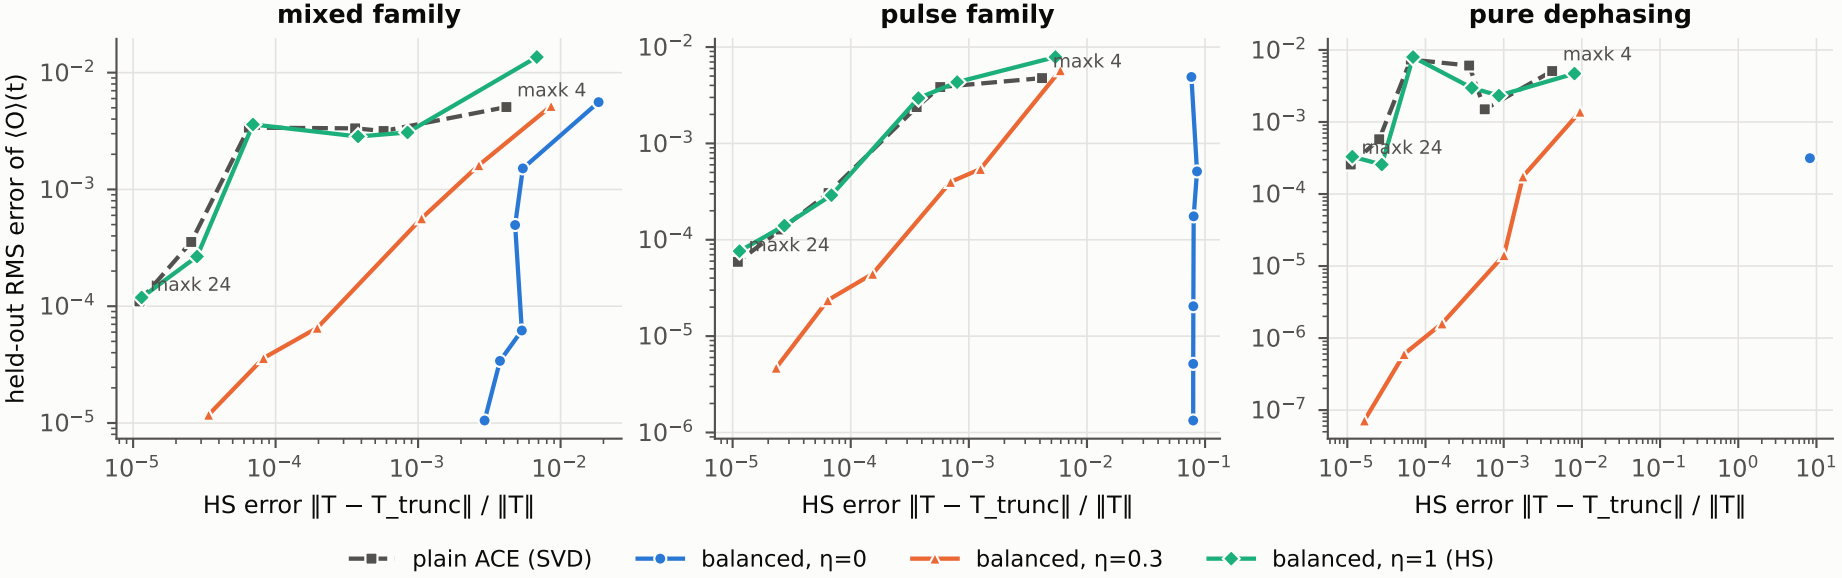
Operational vs HS error (100-mode PT; each line runs over maxk 4–24, lower left is better)
mixed family
pulse family
pure dephasing
held-out RMS error of ⟨O⟩(t)
HS error ‖T − T_trunc‖ / ‖T‖
maxk 4
maxk 24
plain ACE (SVD)
balanced, η=0
balanced, η=0.3
balanced, η=1 (HS)