



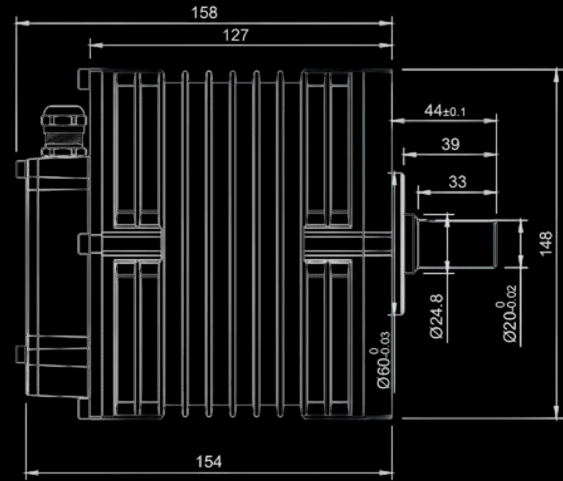


RF-22 Platform

Variant : 86

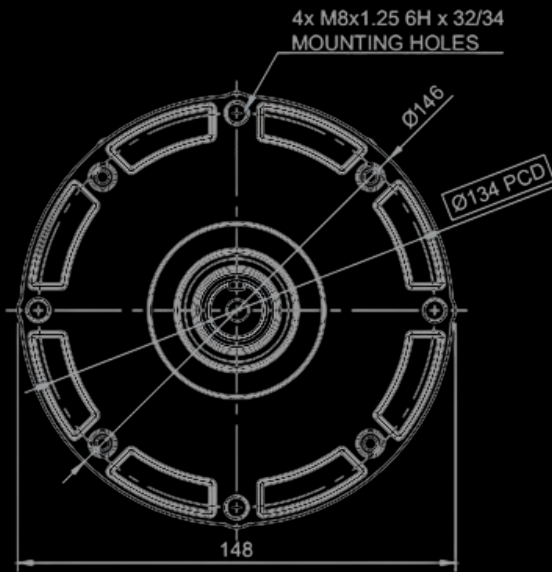


Technical Datasheet

Antarix - RF22/60

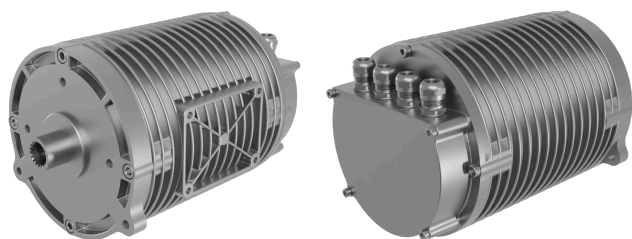

Motor Render

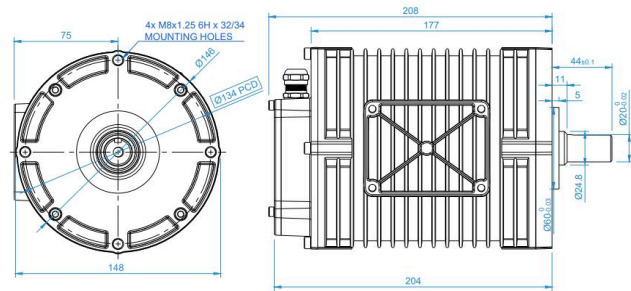

Technical Sketch

Technical Specifications

Specification	48V Model	72V Model
Rated Voltage (V DC):	48	72
Rated Power (kW):	2.2	2.2
Peak Power (kW):	4.0	4.0
Peak Speed (RPM):	5000	5000
Rated Torque (Nm):	9.5	9.5
Peak Torque (Nm):	44.5	69.00
Peak Efficiency:	>94%	>94%
Cooling Method:	Naturally Cooled	Naturally Cooled
Mass:	6.5 kg	6.5 kg
Insulation class:	H Class	H Class
Sensor Type:	ENC (hall signals)	ENC (hall signals)
IP Rating:	IP67	IP67
Communication Mode:	CAN/ one-line	CAN/ one-line

Applications



Scooters



Sweepers



Agri-bot



Power Weeder



Forklift





Loader Vehicle

Antarix - RF22/60

Performance and Efficiency

48V

72V

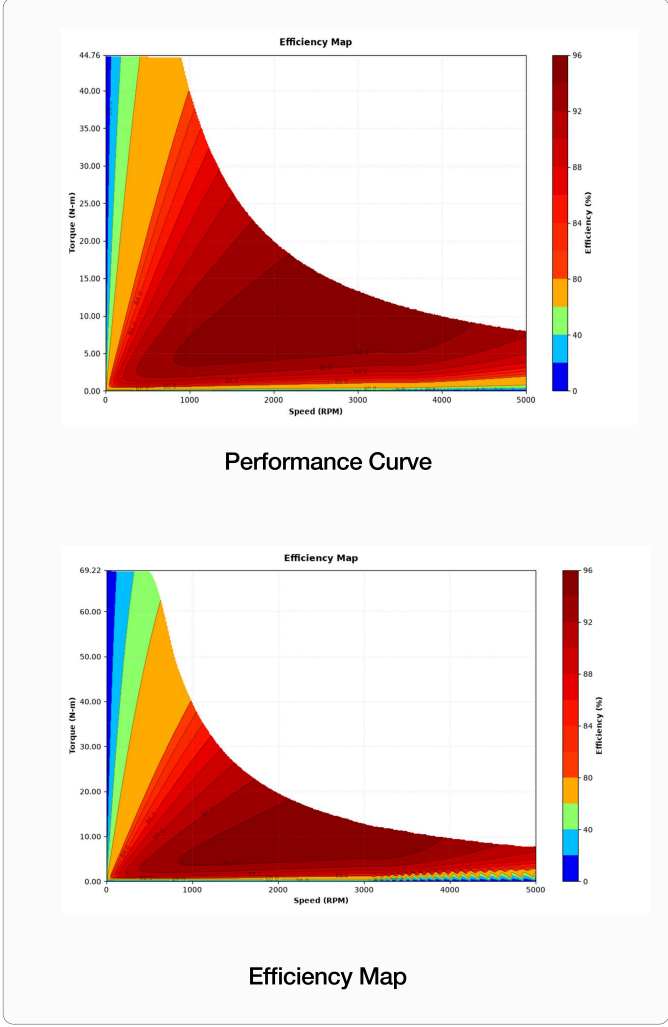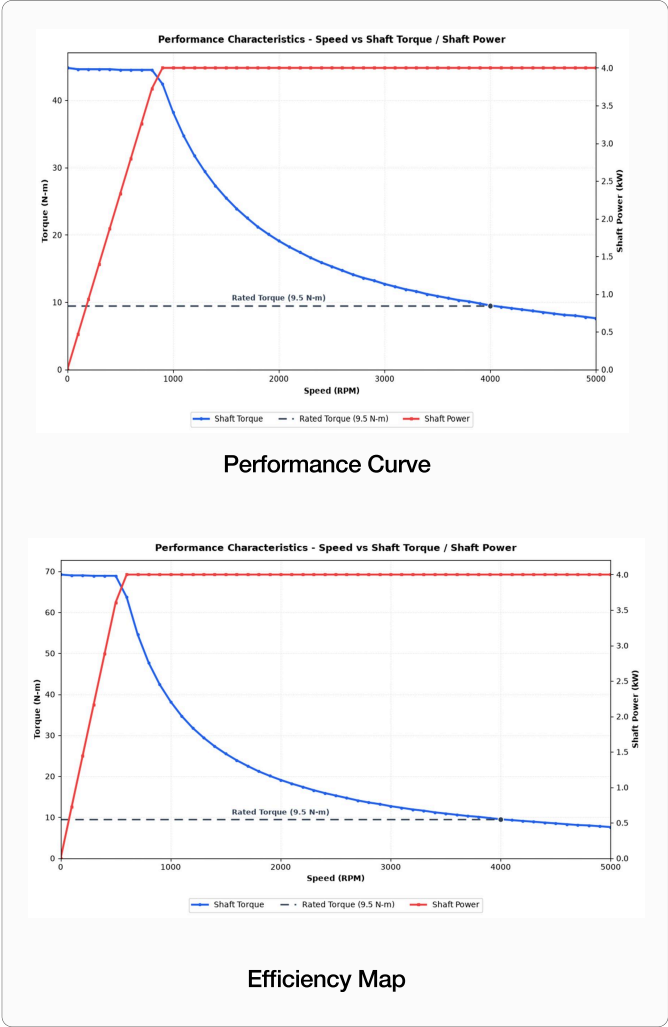

Performance Highlights



CONSTANT TORQUE REGION
Smooth power delivery



WIDE OPERATING RANGE
Effortless climbing




HIGH EFFICIENCY AT NOMINAL LOAD
Tested performance in adverse conditions



STABLE THERMAL PERFORMANCE
Energy efficient system

Antarix - RF22/60

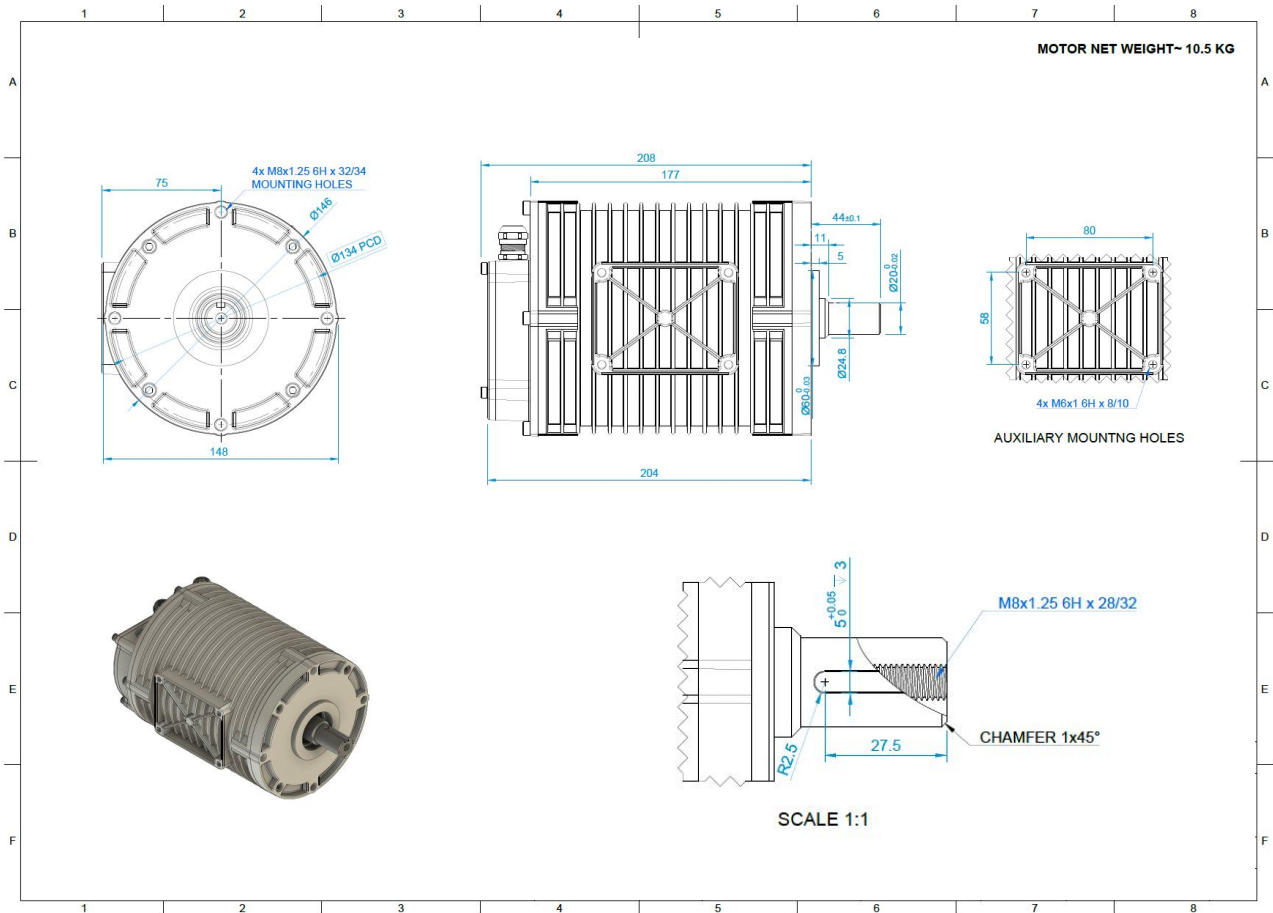

Customisation Options



Shaft

Tailor shaft dimensions and configuration to suit your application.



Voltage

Configure the motor to match your system's voltage requirements.



Mounting

Customise mounting configurations for easier and seamless integration.



Encoder

Select feedback options based on your control and precision requirements.

GET IN TOUCH

+91 9033302953

amit.yadav@naxatralabs.com

+91 98183 82671

aditya.singh@naxatralabs.com

www.naxatralabs.com

enquiry@naxatralabs.com

OUR LOCATIONS

CORPORATE OFFICE

Sector 44, Gurugram,
Haryana, 122003

TECH AND MANUFACTURING

Paldi-Kankaj, Dakroi
Ahemdabad, Gujarat
382425



linktr.ee/naxatralabs