

5 5 5 5 5 5

5
⑥ 5 LMD G F L FEE 5 L FEE 5 LMD G F L FEE 5 LMD R F J FEI 5
G F L G F N 5 G F L G F G 5 5 E G F L E GEN 5
⑥ 5 FGK F 5 FGK G

FC

FF

FG

FH

FI

FJ

FK

GC

GF

GFF

GG

GGF

GGG

GGH

HC

HG

HGF

HGH

HGG

5

5

5

5 5 5 5 5 5 5 5 5

[illegible]

The diagram illustrates the LoRa MAC layer state transitions for two nodes, Node 1 and Node 2, during a Private LoRa communication. The diagram is divided into two main sections, one for Node 1 (top) and one for Node 2 (bottom), each showing a sequence of events and state changes.

Node 1 (Top Section):

- Initial State:** The node starts in a state where the MAC layer is not active (represented by a box with '0' and '1' in the top-left corner).
- PrivateLoRaStart():** This event triggers the activation of the MAC layer. The state transitions to a box where the top-left corner contains '1' and '1'.
- LoRaMacStart():** This event triggers the start of the MAC layer. The state transitions to a box where the top-left corner contains '1' and '1'.
- LoRaMacStop():** This event triggers the stop of the MAC layer. The state transitions to a box where the top-left corner contains '0' and '1'.
- PrivateLoRaStop():** This event triggers the deactivation of the MAC layer. The state transitions to a box where the top-left corner contains '0' and '1'.

Node 2 (Bottom Section):

- Initial State:** The node starts in a state where the MAC layer is not active (represented by a box with '0' and '1' in the top-left corner).
- PrivateLoRaStart():** This event triggers the activation of the MAC layer. The state transitions to a box where the top-left corner contains '1' and '1'.
- LoRaMacStart():** This event triggers the start of the MAC layer. The state transitions to a box where the top-left corner contains '1' and '1'.
- LoRaMacStop():** This event triggers the stop of the MAC layer. The state transitions to a box where the top-left corner contains '0' and '1'.
- PrivateLoRaStop():** This event triggers the deactivation of the MAC layer. The state transitions to a box where the top-left corner contains '0' and '1'.

5 5

5

5 5

5 5

5 5

5 5 5K5 5
5 5

5

5 5

5

5

5

5M5 5

5

5 5

5

5

5

5 5 5

5

5

5

5

5 5

5

5

5

5 5

5

5

5 5

5 5


5 5

5 5

5 5


5 5


5 5

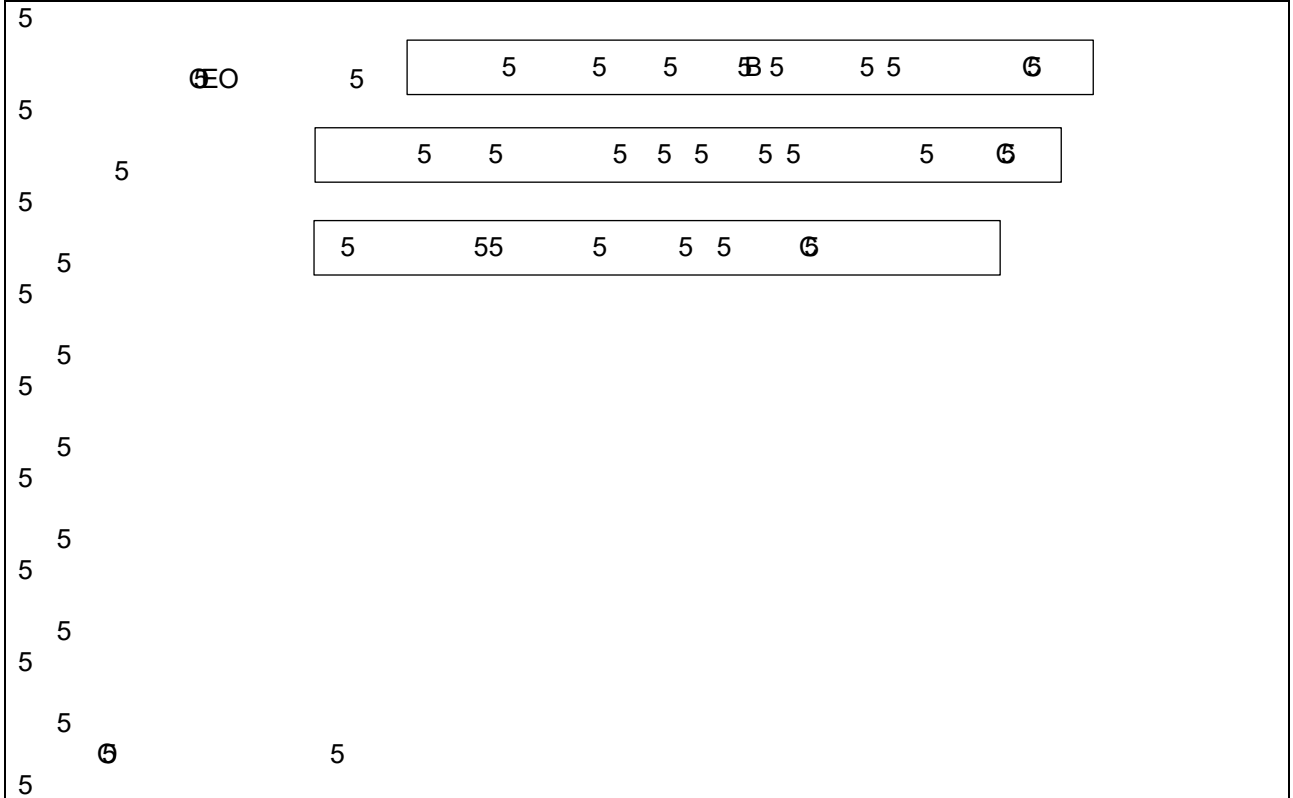

5
5
5

5

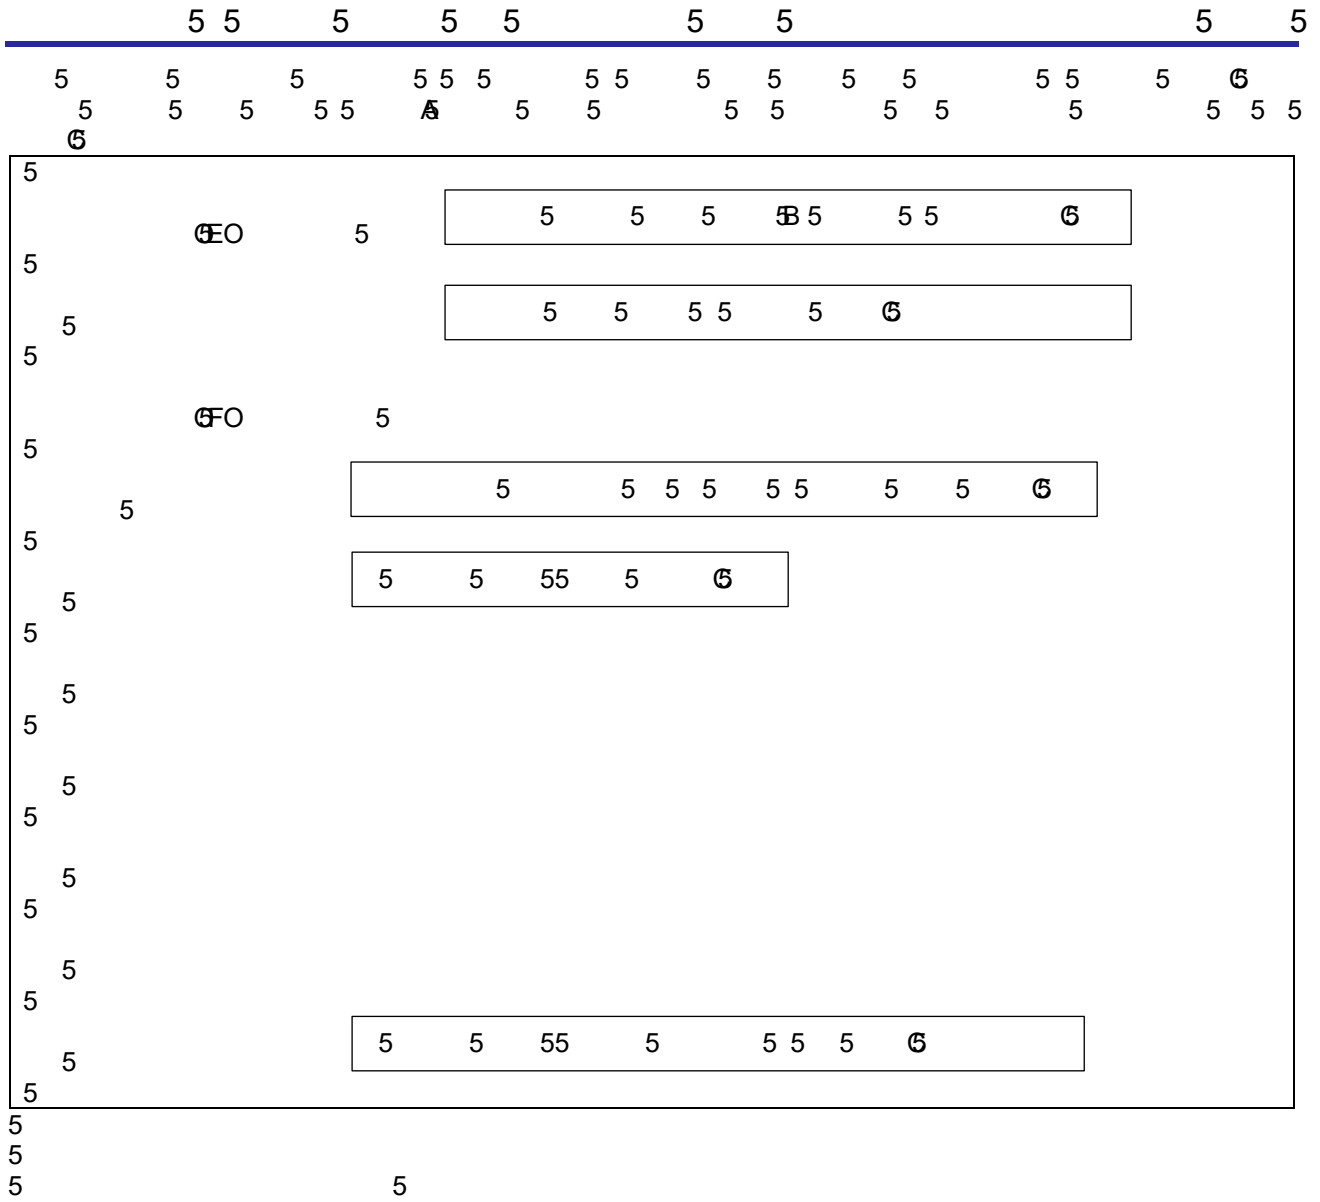

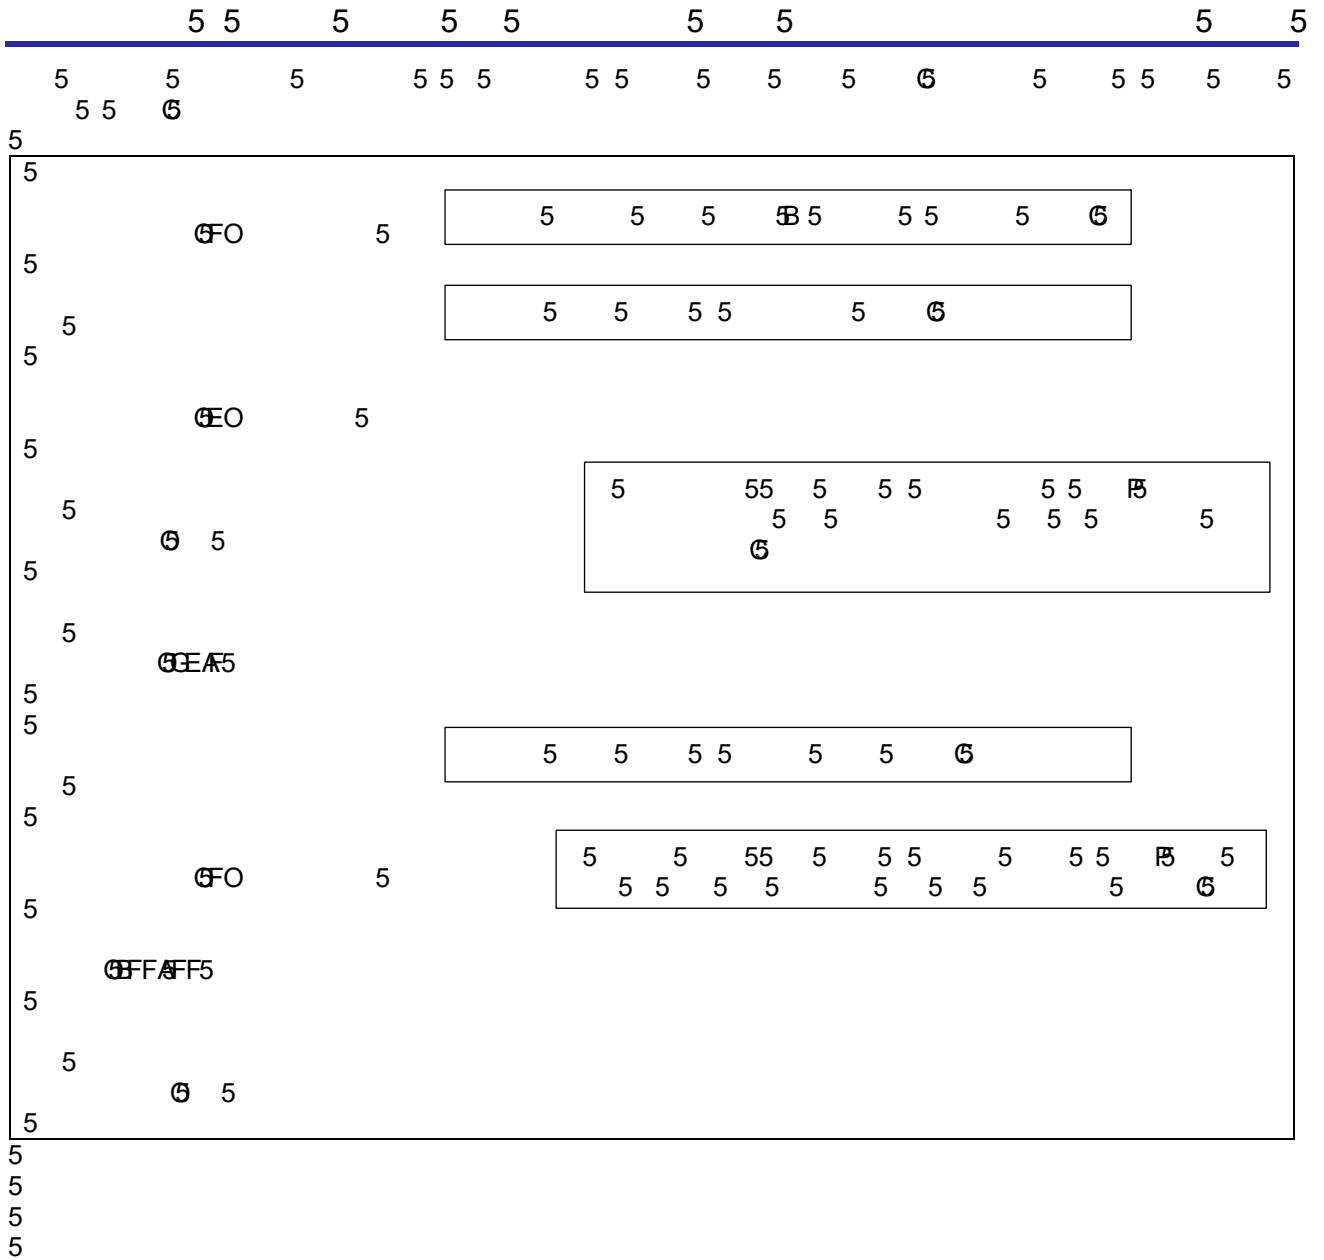

E CE5	CGH5	B	5 5
E QE5	5G Q 5	B	5 5 G
E BE5	5L Q 5	FQ5	5 G
		FQ5	5 5 5N G
E CE5	5FMQJ5	B	5 E G L E GEN 5 5 5 5 G
E ME5	5FGJ5	B	5 LMD G L FEE 5 5 5 G
E NE5	5MGJ5	B	5 5 G

[illegible]

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a

[illegible]