

(12) **United States Patent**  
**Taylor**

(10) **Patent No.:** **US 7,517,504 B2**  
(45) **Date of Patent:** **Apr. 14, 2009**

(54) **AIR TRANSPORTER-CONDITIONER DEVICE WITH TUBULAR ELECTRODE CONFIGURATIONS**

(76) Inventor: **Charles E. Taylor**, 2731 St. Thomas Dr., Punta Gorda, FL (US) 33950

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 908 days.

(21) Appl. No.: **10/795,934**

(22) Filed: **Mar. 8, 2004**

(65) **Prior Publication Data**

US 2004/0170542 A1 Sep. 2, 2004

**Related U.S. Application Data**

(63) Continuation of application No. 10/375,734, filed on Feb. 27, 2003, now abandoned, which is a continuation of application No. 09/774,198, filed on Jan. 29, 2001, now Pat. No. 6,544,485.

(51) **Int. Cl.**  
**B01J 19/08** (2006.01)

(52) **U.S. Cl.** ..... **422/186.04; 96/96**

(58) **Field of Classification Search** ..... **422/186.04; 96/96**

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

653,421 A	7/1900	Lorey
895,729 A	8/1908	Carlborg
995,958 A	6/1911	Goldberg
1,791,338 A	2/1931	Wintermute
1,869,335 A	7/1932	Day
1,882,949 A	10/1932	Ruder
2,129,783 A	9/1938	Penney
2,327,588 A	8/1943	Bennett
2,359,057 A	9/1944	Skinner
2,509,548 A	5/1950	White

2,590,447 A	3/1952	Nord et al.
2,949,550 A	8/1960	Brown
3,018,394 A	1/1962	Brown
3,026,964 A	3/1962	Penney
3,374,941 A	3/1968	Okress
3,518,462 A	6/1970	Brown
3,540,191 A	11/1970	Herman
3,581,470 A	6/1971	Aitkenhead et al.
3,638,058 A	1/1972	Fritzius
3,744,216 A	7/1973	Halloran
3,806,763 A	4/1974	Masuda
3,892,927 A	7/1975	Lindenberg
3,945,813 A	3/1976	Iinoya et al.

(Continued)

**FOREIGN PATENT DOCUMENTS**

CN 2111112 U 7/1972

(Continued)

**OTHER PUBLICATIONS**

U.S. Appl. No. 60/104,573, filed Oct. 16, 1998, Krichtafovitch.


(Continued)

*Primary Examiner*—Kishor Mayekar

(57) **ABSTRACT**

An electronic device electro-kinetically generates an airflow by providing a potential difference between a first electrode array and a second electrode array. The first electrode array includes at least one generally tubular electrode. The second electrode array includes at least inner and outer generally tubular electrodes electrically connected to one another, with the inner electrode located at least partially within the outer electrode.

**33 Claims, 5 Drawing Sheets**

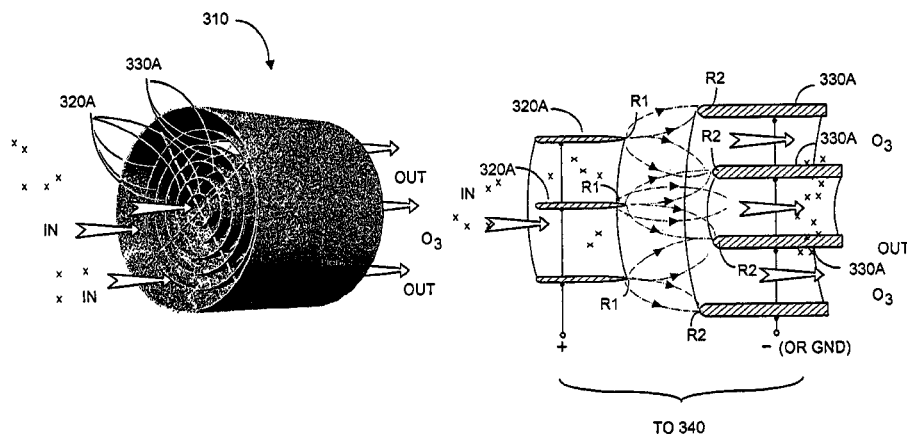

# US 7,517,504 B2

Page 2

## U.S. PATENT DOCUMENTS

3,958,960	A	5/1976	Bakke	4,477,263	A	10/1984	Shaver et al.
3,958,961	A	5/1976	Bakke	4,477,268	A	10/1984	Kalt
3,958,962	A	5/1976	Hayashi	4,481,017	A	11/1984	Furlong
3,981,695	A	9/1976	Fuchs	4,496,375	A	1/1985	Le Vantine
3,984,215	A	10/1976	Zucker	4,502,002	A	2/1985	Ando
3,988,131	A	10/1976	Kanazawa et al.	4,505,724	A	3/1985	Baab
4,007,024	A	2/1977	Sallee et al.	4,509,958	A	4/1985	Masuda et al.
4,052,177	A	10/1977	Kide	4,514,780	A	4/1985	Brussee et al.
4,056,372	A	11/1977	Hayashi	4,515,982	A	5/1985	Lechtken et al.
4,070,163	A	1/1978	Kolb et al.	4,516,991	A	5/1985	Kawashima
4,074,983	A	2/1978	Bakke	4,521,229	A	6/1985	Baker et al.
4,092,134	A	5/1978	Kikuchi	4,522,634	A	6/1985	Frank
4,097,252	A	6/1978	Kirchhoff et al.	4,534,776	A	8/1985	Mammel et al.
4,102,654	A	7/1978	Pellin	4,536,698	A	8/1985	Shevalenko et al.
4,104,042	A	8/1978	Brozenick	4,544,382	A	10/1985	Taillet et al.
4,110,086	A	8/1978	Schwab et al.	4,555,252	A	11/1985	Eckstein
4,119,415	A	10/1978	Hayashi et al.	4,569,684	A	2/1986	Ibbott
4,126,434	A	11/1978	Keiichi	4,582,961	A	4/1986	Frederiksen
4,138,233	A	2/1979	Masuda	4,587,475	A	5/1986	Finney, Jr. et al.
4,147,522	A	4/1979	Gonas et al.	4,588,423	A	5/1986	Gillingham et al.
4,155,792	A	5/1979	Gelhaar et al.	4,590,042	A	5/1986	Drage
4,171,975	A	10/1979	Kato et al.	4,597,780	A	7/1986	Reif
4,185,971	A	1/1980	Isahaya	4,597,781	A	7/1986	Spector
4,189,308	A	2/1980	Feldman	4,600,411	A	7/1986	Santamaria
4,205,969	A	6/1980	Matsumoto	4,601,733	A	7/1986	Ordines et al.
4,209,306	A	6/1980	Feldman et al.	4,604,174	A	8/1986	Bollinger et al.
4,218,225	A	8/1980	Kirchhoff et al.	4,614,573	A	9/1986	Masuda
4,225,323	A	9/1980	Zarchy et al.	4,623,365	A	11/1986	Bergman
4,227,894	A	10/1980	Proynoff	4,626,261	A	12/1986	Jorgensen
4,231,766	A	11/1980	Spurgin	4,632,135	A	12/1986	Lenting et al.
4,232,355	A	11/1980	Finger et al.	4,632,746	A	12/1986	Bergman
4,244,710	A	1/1981	Burger	4,636,981	A	1/1987	Ogura
4,244,712	A	1/1981	Tongret	4,643,744	A	2/1987	Brooks
4,251,234	A	2/1981	Chang	4,643,745	A	2/1987	Sakakibara et al.
4,253,852	A	3/1981	Adams	4,647,836	A	3/1987	Olsen
4,259,093	A	3/1981	Vlastos et al.	4,650,648	A	3/1987	Beer et al.
4,259,452	A	3/1981	Yukuta et al.	4,656,010	A	4/1987	Leitzke et al.
4,259,707	A	3/1981	Penney	4,657,738	A	4/1987	Kanter et al.
4,264,343	A	4/1981	Natarajan et al.	4,659,342	A	4/1987	Lind
4,266,948	A	5/1981	Teague et al.	4,662,903	A	5/1987	Yanagawa
4,282,014	A	8/1981	Winkler et al.	4,666,474	A	5/1987	Cook
4,284,420	A	8/1981	Borysiak	4,668,479	A	5/1987	Manabe et al.
4,289,504	A	9/1981	Scholes	4,670,026	A	6/1987	Hoening
4,293,319	A	10/1981	Claassen, Jr.	4,674,003	A	6/1987	Zylka
4,308,036	A	12/1981	Zahedi et al.	4,680,496	A	7/1987	Letournel et al.
4,315,188	A	2/1982	Cerny et al.	4,686,370	A	8/1987	Blach
4,318,718	A	3/1982	Utsumi et al.	4,689,056	A *	8/1987	Noguchi et al. .... 96/79
4,338,560	A	7/1982	Lemley	4,691,829	A	9/1987	Auer
4,342,571	A	8/1982	Hayashi	4,692,174	A	9/1987	Gelfand et al.
4,349,359	A	9/1982	Fitch et al.	4,693,869	A	9/1987	Pfaff
4,351,648	A	9/1982	Penney	4,694,376	A	9/1987	Gessler
4,354,861	A	10/1982	Kalt	4,702,752	A	10/1987	Yanagawa
4,357,150	A	11/1982	Masuda et al.	4,713,092	A	12/1987	Kikuchi et al.
4,362,632	A	12/1982	Jacob	4,713,093	A	12/1987	Hansson
4,363,072	A	12/1982	Coggins	4,713,724	A	12/1987	Voelkel
4,366,525	A	12/1982	Baumgartner	4,715,870	A	12/1987	Masuda et al.
4,369,776	A	1/1983	Roberts	4,725,289	A	2/1988	Quintilian
4,375,364	A	3/1983	Van Hoesen et al.	4,726,812	A	2/1988	Hirth
4,380,900	A	4/1983	Linder et al.	4,726,814	A	2/1988	Weitman
4,386,395	A	5/1983	Francis, Jr.	4,736,127	A	4/1988	Jacobsen
4,391,614	A	7/1983	Rozmus	4,743,275	A	5/1988	Flanagan
4,394,239	A	7/1983	Kitzelmann et al.	4,749,390	A	6/1988	Burnett et al.
4,405,342	A	9/1983	Bergman	4,750,921	A	6/1988	Sugita et al.
4,406,671	A	9/1983	Rozmus	4,760,302	A	7/1988	Jacobsen
4,412,850	A	11/1983	Kurata et al.	4,760,303	A	7/1988	Miyake
4,413,225	A	11/1983	Donig et al.	4,765,802	A	8/1988	Gombos et al.
4,414,603	A	11/1983	Masuda	4,771,361	A *	9/1988	Varga ..... 361/231
4,435,190	A	3/1984	Taillet et al.	4,772,297	A	9/1988	Anzai
4,440,552	A	4/1984	Uchiya et al.	4,779,182	A	10/1988	Mickal et al.
4,443,234	A	4/1984	Carlsson	4,781,736	A	11/1988	Cheney et al.
4,445,911	A	5/1984	Lind	4,786,844	A	11/1988	Farrell et al.
				4,789,801	A *	12/1988	Lee ..... 310/308
				4,808,200	A	2/1989	Dallhammer et al.

# US 7,517,504 B2

Page 3

4,811,159 A	3/1989	Foster, Jr.	5,316,741 A	5/1994	Sewell et al.
4,822,381 A	4/1989	Mosley et al.	5,330,559 A	7/1994	Cheney et al.
4,853,005 A	8/1989	Jaisinghani et al.	5,348,571 A	9/1994	Weber
4,869,736 A	9/1989	Ivester et al.	5,376,168 A	12/1994	Inculet
4,892,713 A	1/1990	Newman	5,378,978 A	1/1995	Gallo et al.
4,929,139 A	5/1990	Vorreiter et al.	5,386,839 A	2/1995	Chen
4,940,470 A	7/1990	Jaisinghani et al.	5,395,430 A	3/1995	Lundgren et al.
4,940,894 A	7/1990	Morters	5,401,301 A	3/1995	Schulmerich et al.
4,941,068 A	7/1990	Hofmann	5,401,302 A	3/1995	Schulmerich et al.
4,941,224 A	7/1990	Saeki et al.	5,403,383 A	4/1995	Jaisinghani
4,944,778 A	7/1990	Yanagawa	5,405,434 A	4/1995	Inculet
4,954,320 A	9/1990	Birmingham et al.	5,407,469 A	4/1995	Sun
4,955,991 A	9/1990	Torok et al.	5,407,639 A	4/1995	Watanabe et al.
4,966,666 A	10/1990	Waltonen	5,417,936 A	5/1995	Suzuki et al.
4,967,119 A	10/1990	Torok et al.	5,419,953 A	5/1995	Chapman
4,976,752 A	12/1990	Torok et al.	5,433,772 A	7/1995	Sikora
4,978,372 A	12/1990	Pick	5,435,817 A	7/1995	Davis et al.
D315,598 S	3/1991	Yamamoto et al.	5,435,978 A	7/1995	Yokomi
5,003,774 A	4/1991	Leonard	5,437,713 A	8/1995	Chang
5,006,761 A	4/1991	Torok et al.	5,437,843 A	8/1995	Kuan
5,010,869 A	4/1991	Lee	5,445,798 A	8/1995	Ikeda et al.
5,012,093 A	4/1991	Shimizu	5,466,279 A	11/1995	Hattori et al.
5,012,094 A	4/1991	Hamade	5,468,454 A	11/1995	Kim
5,012,159 A	4/1991	Torok et al.	5,474,599 A	12/1995	Cheney et al.
5,022,979 A	6/1991	Hijikata et al.	5,484,472 A	1/1996	Weinberg
5,024,685 A	6/1991	Torok et al.	5,484,473 A	1/1996	Bontempi
5,030,254 A	7/1991	Heyen et al.	5,492,678 A	2/1996	Ota et al.
5,034,033 A	7/1991	Alsup et al.	5,501,844 A	3/1996	Kasting, Jr. et al.
5,037,456 A	8/1991	Yu	5,503,808 A	4/1996	Garbutt et al.
5,045,095 A	9/1991	You	5,503,809 A	4/1996	Coate et al.
5,053,912 A	10/1991	Loreth et al.	5,505,914 A	4/1996	Tona-Serra
5,059,219 A	10/1991	Plaks et al.	5,508,008 A	4/1996	Wasser
5,061,462 A	10/1991	Suzuki	5,514,345 A	5/1996	Garbutt et al.
5,066,313 A	11/1991	Mallory, Sr.	5,516,493 A	5/1996	Bell et al.
5,072,746 A	12/1991	Kantor	5,518,531 A	5/1996	Joannu
5,076,820 A	12/1991	Gurvitz	5,520,887 A	5/1996	Shimizu et al.
5,077,468 A	12/1991	Hamade	5,525,310 A	6/1996	Decker et al.
5,077,500 A	12/1991	Torok et al.	5,529,613 A	6/1996	Yavnieli
5,100,440 A	3/1992	Stahel et al.	5,529,760 A	6/1996	Burris
RE33,927 E	5/1992	Fuzimura	5,532,798 A	7/1996	Nakagami et al.
D326,514 S	5/1992	Alsup et al.	5,535,089 A	7/1996	Ford et al.
5,118,942 A	6/1992	Hamade	5,536,477 A	7/1996	Cha et al.
5,125,936 A	6/1992	Johansson	5,538,695 A	7/1996	Shinjo et al.
5,136,461 A	8/1992	Zellweger	5,540,761 A	7/1996	Yamamoto
5,137,546 A	8/1992	Steinbacher et al.	5,542,967 A	8/1996	Ponizovsky et al.
5,141,529 A	8/1992	Oakley et al.	5,545,379 A	8/1996	Gray
5,141,715 A	8/1992	Sackinger et al.	5,545,380 A	8/1996	Gray
D329,284 S	9/1992	Patton	5,547,643 A	8/1996	Nomoto et al.
5,147,429 A	9/1992	Bartholomew et al.	5,549,874 A	8/1996	Kamiya et al.
5,154,733 A	10/1992	Fujii et al.	5,554,344 A	9/1996	Duarte
5,158,580 A	10/1992	Chang	5,554,345 A	9/1996	Kitchenman
D332,655 S	1/1993	Lytle et al.	5,569,368 A	10/1996	Larsky et al.
5,180,404 A	1/1993	Loreth et al.	5,569,437 A	10/1996	Stiehl et al.
5,183,480 A	2/1993	Raterman et al.	D375,546 S	11/1996	Lee
5,196,171 A	3/1993	Peltier	5,571,483 A	11/1996	Pfingstl et al.
5,198,003 A	3/1993	Haynes	5,573,577 A	11/1996	Joannou
5,199,257 A	4/1993	Colletta et al.	5,573,730 A	11/1996	Gillum
5,210,678 A	5/1993	Lain et al.	5,578,112 A	11/1996	Krause
5,215,558 A	6/1993	Moon	5,578,280 A	11/1996	Kazi et al.
5,217,504 A	6/1993	Johansson	5,582,632 A	12/1996	Nohr et al.
5,217,511 A	6/1993	Plaks et al.	5,587,131 A	12/1996	Malkin et al.
5,234,555 A	8/1993	Ibbott	D377,523 S	1/1997	Marvin et al.
5,248,324 A	9/1993	Hara	5,591,253 A	1/1997	Altman et al.
5,250,267 A	10/1993	Johnson et al.	5,591,334 A	1/1997	Shimizu et al.
5,254,155 A	10/1993	Mensi	5,591,412 A	1/1997	Jones et al.
5,266,004 A	11/1993	Tsumurai et al.	5,593,476 A	1/1997	Coppom
5,271,763 A	12/1993	Jang	5,601,636 A	2/1997	Glucksman
5,282,891 A	2/1994	Durham	5,603,752 A	2/1997	Hara
5,290,343 A	3/1994	Morita et al.	5,603,893 A	2/1997	Gundersen et al.
5,296,019 A	3/1994	Oakley et al.	5,614,002 A	3/1997	Chen
5,302,190 A	4/1994	Williams	5,624,476 A	4/1997	Eyraud
5,308,586 A	5/1994	Fritsche et al.	5,630,866 A	5/1997	Gregg
5,315,838 A	5/1994	Thompson	5,630,990 A	5/1997	Conrad et al.

# US 7,517,504 B2

Page 4

5,637,198 A	6/1997	Breault	6,464,754 B1	10/2002	Ford
5,637,279 A	6/1997	Besen et al.	6,471,753 B1	10/2002	Ahn et al.
5,641,342 A	6/1997	Smith et al.	6,494,940 B1	12/2002	Hak
5,641,461 A	6/1997	Ferone	6,504,308 B1	1/2003	Krichtafovitch et al.
5,647,890 A	7/1997	Yamamoto	6,508,982 B1 *	1/2003	Shoji ..... 422/22
5,648,049 A	7/1997	Jones et al.	6,544,485 B1 *	4/2003	Taylor ..... 422/186.04
5,655,210 A	8/1997	Gregoire et al.	6,585,935 B1	7/2003	Taylor et al.
5,656,063 A	8/1997	Hsu	6,588,434 B2	7/2003	Taylor et al.
5,665,147 A	9/1997	Taylor et al.	6,603,268 B2	8/2003	Lee
5,667,563 A	9/1997	Silva, Jr.	6,613,277 B1	9/2003	Monagan
5,667,564 A	9/1997	Weinberg	6,632,407 B1	10/2003	Lau et al.
5,667,565 A	9/1997	Gondar	6,635,105 B2	10/2003	Ahlborn et al.
5,667,756 A	9/1997	Ho	6,672,315 B2	1/2004	Taylor et al.
5,669,963 A	9/1997	Horton et al.	6,709,484 B2	3/2004	Lau et al.
5,678,237 A	10/1997	Powell et al.	6,713,026 B2	3/2004	Taylor et al.
5,681,434 A	10/1997	Eastlund	6,753,652 B2	6/2004	Kim
5,681,533 A	10/1997	Hiroimi	6,761,796 B2	7/2004	Srivastava et al.
5,698,164 A	12/1997	Kishioka et al.	6,768,108 B2	7/2004	Hirano et al.
5,702,507 A	12/1997	Wang	6,768,110 B2	7/2004	Alani
D389,567 S	1/1998	Gudefin	6,768,120 B2	7/2004	Leung et al.
5,766,318 A	6/1998	Loreth et al.	6,768,121 B2	7/2004	Horskey
5,779,769 A	7/1998	Jiang	6,770,878 B2	8/2004	Uhlemann et al.
5,814,135 A	9/1998	Weinberg	6,774,359 B1	8/2004	Hirabayashi et al.
5,879,435 A	3/1999	Satyapal et al.	6,777,686 B2	8/2004	Olson et al.
5,893,977 A	4/1999	Pucci	6,777,699 B1	8/2004	Miley et al.
5,911,957 A	6/1999	Khatchatrian et al.	6,777,882 B2	8/2004	Goldberg et al.
5,972,076 A	10/1999	Nichols et al.	6,781,136 B1	8/2004	Kato
5,975,090 A	11/1999	Taylor et al.	6,785,912 B1	9/2004	Julio
5,980,614 A	11/1999	Loreth et al.	6,791,814 B2	9/2004	Adachi et al.
5,993,521 A	11/1999	Loreth et al.	6,794,661 B2	9/2004	Tsukihara et al.
5,997,619 A	12/1999	Knuth et al.	6,797,339 B2	9/2004	Akizuki et al.
6,019,815 A	2/2000	Satyapal et al.	6,797,964 B2	9/2004	Yamashita
6,042,637 A	3/2000	Weinberg	6,799,068 B1	9/2004	Hartmann et al.
6,056,808 A *	5/2000	Krause ..... 96/24	6,800,862 B2	10/2004	Matsumoto et al.
6,063,168 A	5/2000	Nichols et al.	6,803,585 B2	10/2004	Glukhoy
6,086,657 A	7/2000	Freije	6,805,916 B2	10/2004	Cadieu
6,117,216 A	9/2000	Loreth	6,806,035 B1	10/2004	Atireklapvarodom et al.
6,118,645 A	9/2000	Partridge	6,806,163 B2	10/2004	Wu et al.
6,126,722 A	10/2000	Mitchell et al.	6,806,468 B2	10/2004	Laiko et al.
6,126,727 A	10/2000	Lo	6,808,606 B2	10/2004	Thomsen et al.
6,149,717 A	11/2000	Satyapal et al.	6,809,310 B2	10/2004	Chen
6,149,815 A	11/2000	Sauter	6,809,312 B1	10/2004	Park et al.
6,152,146 A	11/2000	Taylor et al.	6,809,325 B2	10/2004	Dahl et al.
6,163,098 A	12/2000	Taylor et al.	6,812,647 B2	11/2004	Cornelius
6,176,977 B1	1/2001	Taylor et al.	6,815,690 B2	11/2004	Veerassamy et al.
6,182,461 B1	2/2001	Washburn et al.	6,818,257 B2	11/2004	Amann et al.
6,182,671 B1	2/2001	Taylor et al.	6,818,909 B2	11/2004	Murrell et al.
6,193,852 B1	2/2001	Caracciolo et al.	6,819,053 B2	11/2004	Johnson
6,203,600 B1	3/2001	Loreth	6,863,869 B2	3/2005	Taylor et al.
6,212,883 B1	4/2001	Kang	6,896,853 B2	5/2005	Law et al.
6,228,149 B1	5/2001	Alenichev et al.	6,911,186 B2	6/2005	Taylor et al.
6,252,012 B1	6/2001	Egitto et al.	2001/0004046 A1	6/2001	Taylor et al.
6,270,733 B1	8/2001	Rodden	2001/0048906 A1	12/2001	Lau et al.
6,277,248 B1	8/2001	Ishioka et al.	2002/0069760 A1	6/2002	Pruette et al.
6,282,106 B2	8/2001	Grass	2002/0079212 A1	6/2002	Taylor et al.
D449,097 S	10/2001	Smith et al.	2002/0098131 A1	7/2002	Taylor et al.
D449,679 S	10/2001	Smith et al.	2002/0100488 A1	8/2002	Taylor et al.
6,296,692 B1	10/2001	Gutmann	2002/0122751 A1	9/2002	Sinaiko et al.
6,302,944 B1	10/2001	Hoenig	2002/0122752 A1	9/2002	Taylor et al.
6,309,514 B1	10/2001	Conrad et al.	2002/0127156 A1	9/2002	Taylor
6,312,507 B1	11/2001	Taylor et al.	2002/0134664 A1	9/2002	Taylor et al.
6,315,821 B1	11/2001	Pillion et al.	2002/0134665 A1	9/2002	Taylor et al.
6,328,791 B1	12/2001	Pillion et al.	2002/0141914 A1	10/2002	Lau et al.
6,348,103 B1	2/2002	Ahlborn et al.	2002/0144601 A1	10/2002	Palestro et al.
6,350,417 B1	2/2002	Lau et al.	2002/0146356 A1	10/2002	Sinaiko et al.
6,362,604 B1	3/2002	Cravey	2002/0150520 A1	10/2002	Taylor et al.
6,372,097 B1	4/2002	Chen	2002/0152890 A1	10/2002	Leiser
6,373,723 B1	4/2002	Wallgren et al.	2002/0155041 A1	10/2002	McKinney, Jr. et al.
6,379,427 B1	4/2002	Siess	2002/0170435 A1	11/2002	Joannou
6,391,259 B1	5/2002	Malkin et al.	2002/0190658 A1	12/2002	Lee
6,398,852 B1	6/2002	Loreth	2002/0195951 A1	12/2002	Lee
6,447,587 B1	9/2002	Pillion et al.	2003/0005824 A1	1/2003	Katou et al.
6,451,266 B1	9/2002	Lau et al.	2003/0170150 A1	9/2003	Law et al.

2003/0196887	A1	10/2003	Lau et al.
2003/0206837	A1	11/2003	Taylor et al.
2003/0206839	A1	11/2003	Taylor et al.
2003/0206840	A1	11/2003	Taylor et al.
2004/0033176	A1	2/2004	Lee et al.
2004/0052700	A1	3/2004	Kotlyar et al.
2004/0065202	A1	4/2004	Gatchell et al.
2004/0096376	A1	5/2004	Taylor
2004/0136863	A1	7/2004	Yates et al.
2004/0166037	A1	8/2004	Youdehl et al.
2004/0226447	A1	11/2004	Lau et al.
2004/0234431	A1	11/2004	Taylor et al.
2004/0237787	A1	12/2004	Reeves et al.
2004/0251124	A1	12/2004	Lau
2004/0251909	A1	12/2004	Taylor et al.
2005/0000793	A1	1/2005	Taylor et al.

## FOREIGN PATENT DOCUMENTS

CN	87210843	U	7/1988
CN	2138764	Y	6/1993
CN	2153231	Y	12/1993
DE	2206057		8/1973
DE	197 41 621 C 1		6/1999
EP	0433152	A1	12/1990
EP	0332624	B1	1/1992
FR	2690509		10/1993
GB	643363		9/1950
JP	S51-90077		8/1976
JP	56-078645	A *	6/1981
JP	S62-20653		2/1987
JP	S63-164948		10/1988
JP	10137007		5/1998
JP	11-047636	A *	2/1999
JP	11104223		4/1999
JP	2000236914		9/2000
WO	WO 92/05875	A1	4/1992
WO	WO 96/04703	A1	2/1996
WO	WO 99/07474	A1	2/1999
WO	WO00/10713	A1	3/2000
WO	WO01/47803	A1	7/2001
WO	WO01/48781	A1	7/2001
WO	WO01/64349	A1	9/2001
WO	WO01/85348	A2	11/2001
WO	WO02/20162	A2	3/2002
WO	WO02/20163	A2	3/2002
WO	WO02/30574	A1	4/2002
WO	WO02/32578	A1	4/2002
WO	WO02/42003	A1	5/2002
WO	WO02/066167	A1	8/2002
WO	WO03/009944	A1	2/2003
WO	WO03/013620	A1	2/2003
WO	WO 03/013734	AA	2/2003

## OTHER PUBLICATIONS

U.S. Appl. No. 60/306,479, filed Jul. 18, 2001, Taylor.  
 U.S. Appl. No. 60/341,179, filed Dec. 13, 2001, Taylor et al.  
 U.S. Appl. No. 60/340,702, filed Dec. 13, 2001, Taylor et al.  
 U.S. Appl. No. 60/341,377, filed Dec. 13, 2001, Taylor et al.  
 U.S. Appl. No. 60/341,518, filed Dec. 13, 2001, Taylor.

U.S. Appl. No. 60/340,288, filed Dec. 13, 2001, Taylor.  
 U.S. Appl. No. 60/341,176, filed Dec. 13, 2001, Taylor.  
 U.S. Appl. No. 60/340,462, filed Dec. 13, 2001, Taylor.  
 U.S. Appl. No. 60/340,090, filed Dec. 13, 2001, Taylor.  
 U.S. Appl. No. 60/341,433, filed Dec. 13, 2001, Taylor.  
 U.S. Appl. No. 60/341,592, filed Dec. 13, 2001, Taylor.  
 U.S. Appl. No. 60/341,320, filed Dec. 13, 2001, Taylor.  
 U.S. Appl. No. 60/391,070, filed Jun. 6, 2002, Reeves.  
 Blueair A V 402 Air Purifier, [http://www.air-purifiers-usa.biz/Blueair\\_AV402.htm](http://www.air-purifiers-usa.biz/Blueair_AV402.htm), 4 pp., 1996.  
 Blueair A V 501 Air Purifier, [http://www.air-purifiers-usa.biz/Blueair\\_AV501.htm](http://www.air-purifiers-usa.biz/Blueair_AV501.htm), 15 pp., 1997.  
 Consumer Reports.org, "Air-Cleaners: Behind the Hype," [http://www.consumerreports.org/main/content/printable.jsp?FOLDER%3C%3EFOLDER\\_id,Oct,2003,6pp](http://www.consumerreports.org/main/content/printable.jsp?FOLDER%3C%3EFOLDER_id,Oct,2003,6pp).  
 English Translation of German Patent Document DE 197 41 621 C1; Publication Date: Jun. 10, 1999.  
 English Translation of German Published Patent Application 2206057; Publication Date: Aug. 16, 1973.  
 English Translation of Japanese Unexamined Patent Application Bulletin No. S51-90077; Publication Date: Aug. 6, 1976.  
 English Translation of Japanese Unexamined Utility Model Application No. S62-20653; Publication Date: Feb. 7, 1987.  
 English Translation of Japanese Unexamined Utility Model Application No. S63-164948; Publication Date: Oct. 27, 1988.  
 Friedrich C-90A Electronic Air Cleaner, Service Information, Friedrich Air Conditioning Co., 12 pp., 1985.  
 Friedrich C-90A, "How the C-90A Works," BestAirCleaner.com <http://www.bestaircleaner.com/faq/c90works.asp>, 1 page, (no date available).  
 "Household Air Cleaners," Consumer Reports Magazine, Oct. 1992, 6 pp.  
 LakeAir Excel and Maxum Portable Electronic Air Cleaners, Operating and Service Manual, LakeAir International, Inc., 11 pp., 1971.  
 LENTEK Sila™ Plug-In Air Purifier/Deodorizer product box copy-righted 1999, 13 pages.  
 Trion 120 Air Purifier, Model 442501-025, <http://www.feddersoutlet.com/trion120.html>, 16 pp., believed to be at least one year prior to Nov. 5, 1998.  
 Trion 150 Air Purifier, Model 45000-002, <http://www.feddersoutlet.com/trion150.html>, 11 pp., believed to be at least one year prior to Nov. 5, 1998.  
 Trion 350 Air Purifier, Model 450111-010, <http://www.feddersoutlet.com/trion350.html>, 12 pp., believed to be at least one year prior to Nov. 5, 1998.  
 Trion Console 250 Electronic Air Cleaner, Model Series 442857 and 445600, Manual for Installation-Operation-Maintenance, Trion Inc., 7 pp., believed to be at least one year prior to Nov. 5, 1998.  
 U.S. Appl. No. 10/278,193, filed Oct. 21, 2002, Reeves et al.  
 U.S. Appl. No. 10/405,193, filed Apr. 1, 2003, Lee et al.  
 Electrical schematic and promotional material available from Zenion Industries, 7 pages, Aug. 1990.  
 Promotional material available from Zenion Industries for the Plasma-Pure 100/200/300, 2 pages, Aug. 1990.  
 Promotional material available from Zenion Industries for the Plasma-Tron, 2 pages, Aug. 1990.  
 LENTEK Sila™ Plug-In Air Purifier/Deodorizer product box copy-righted 1999, 13 pages.

\* cited by examiner

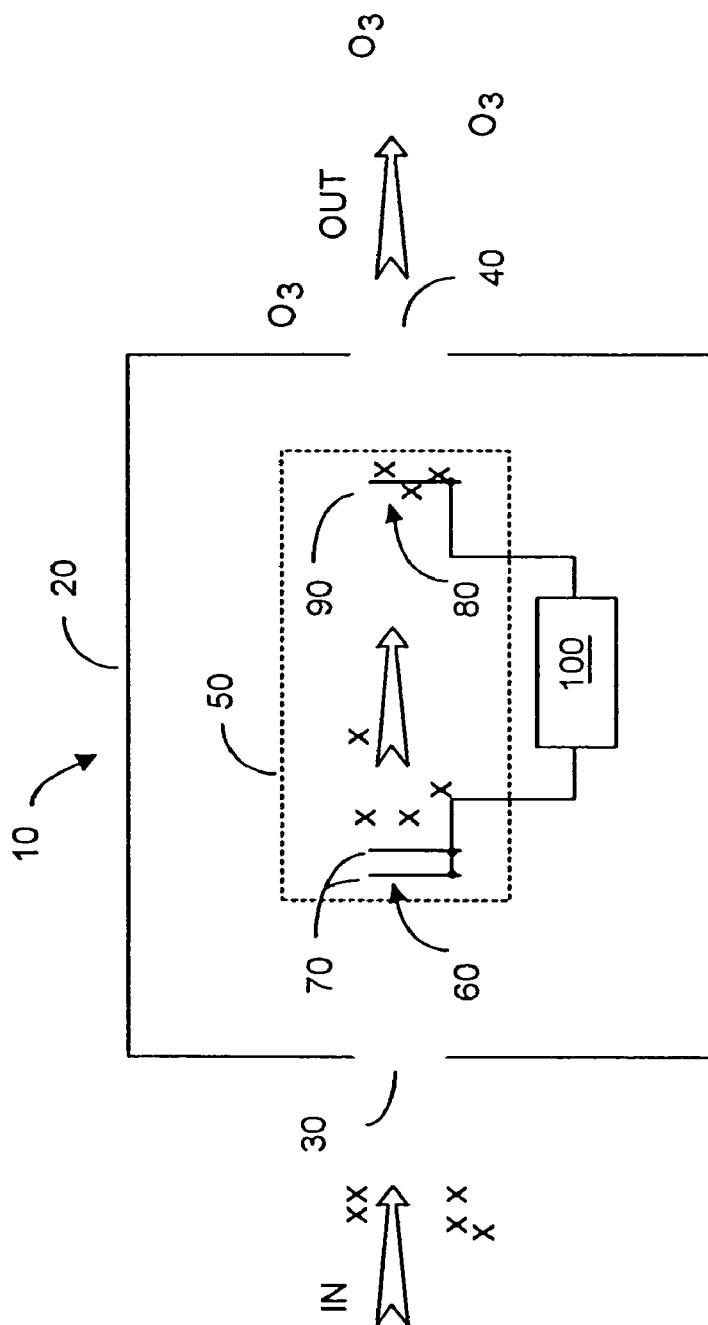


FIG. 1 (PRIOR ART)

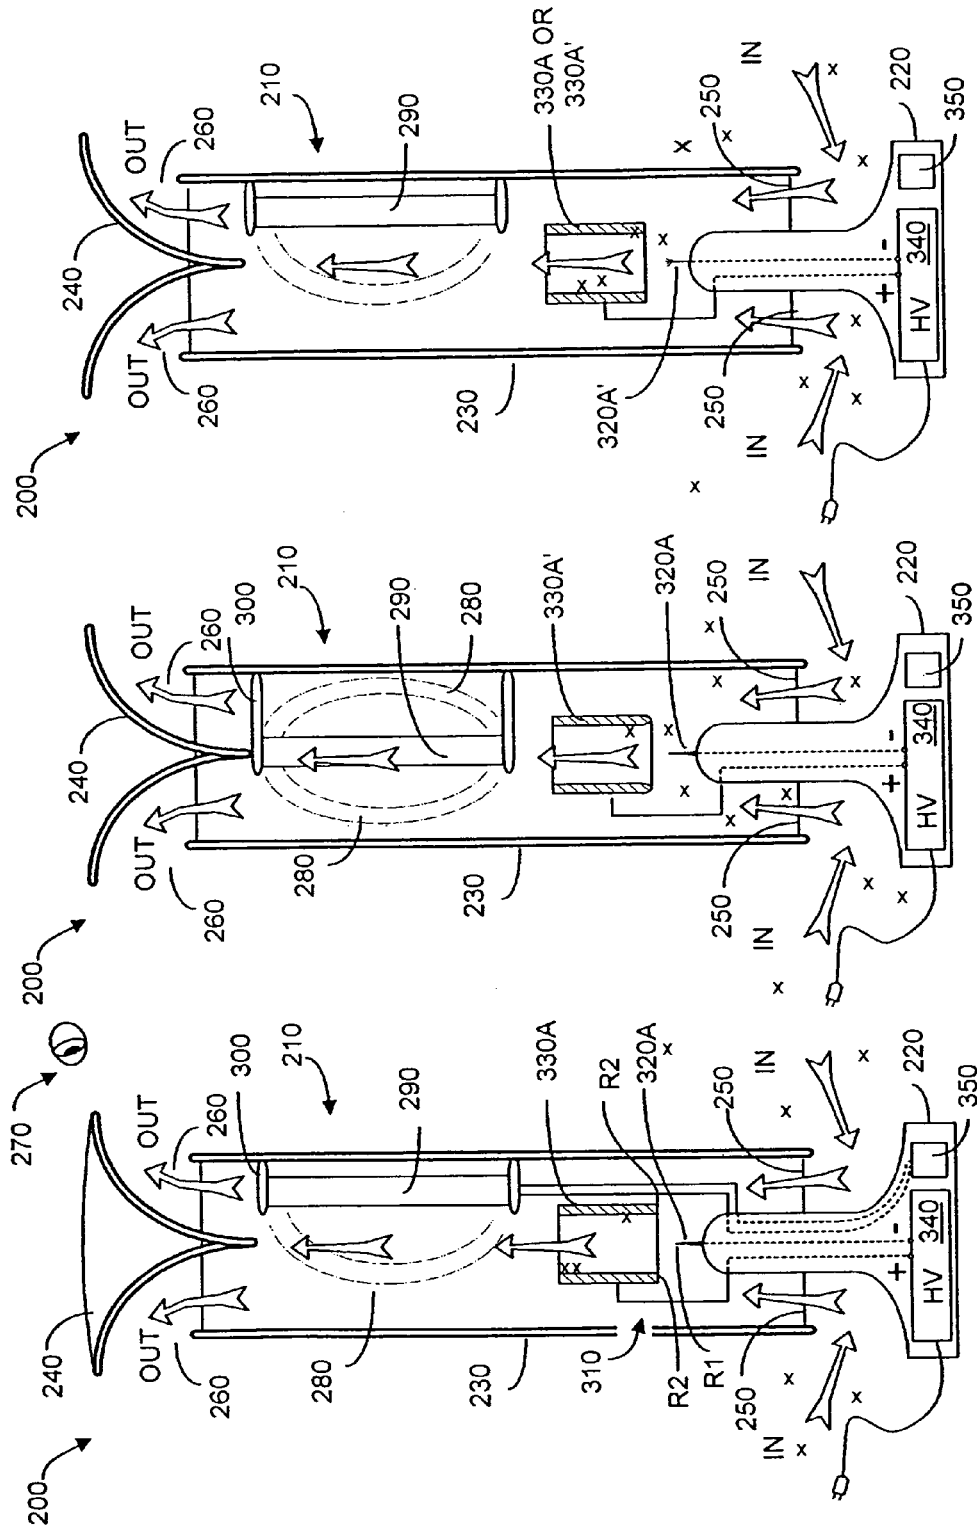


FIG. 2C

FIG. 2B

FIG. 2A

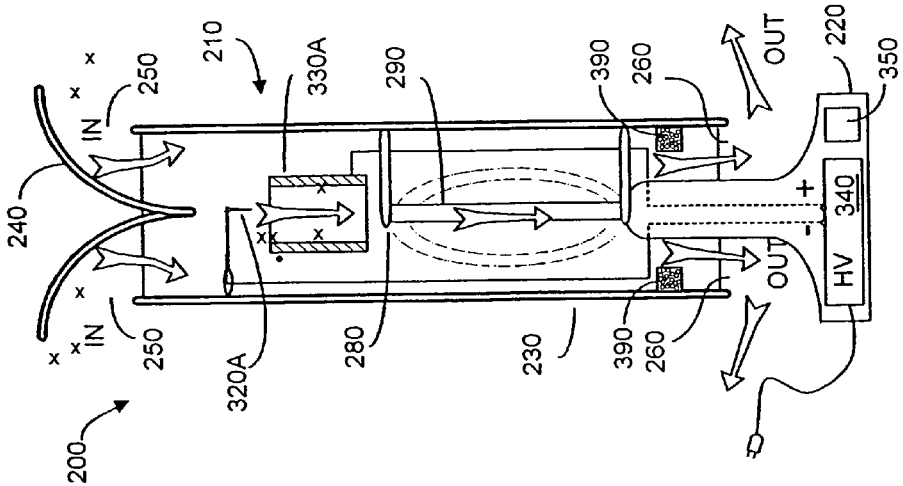


FIG. 2D

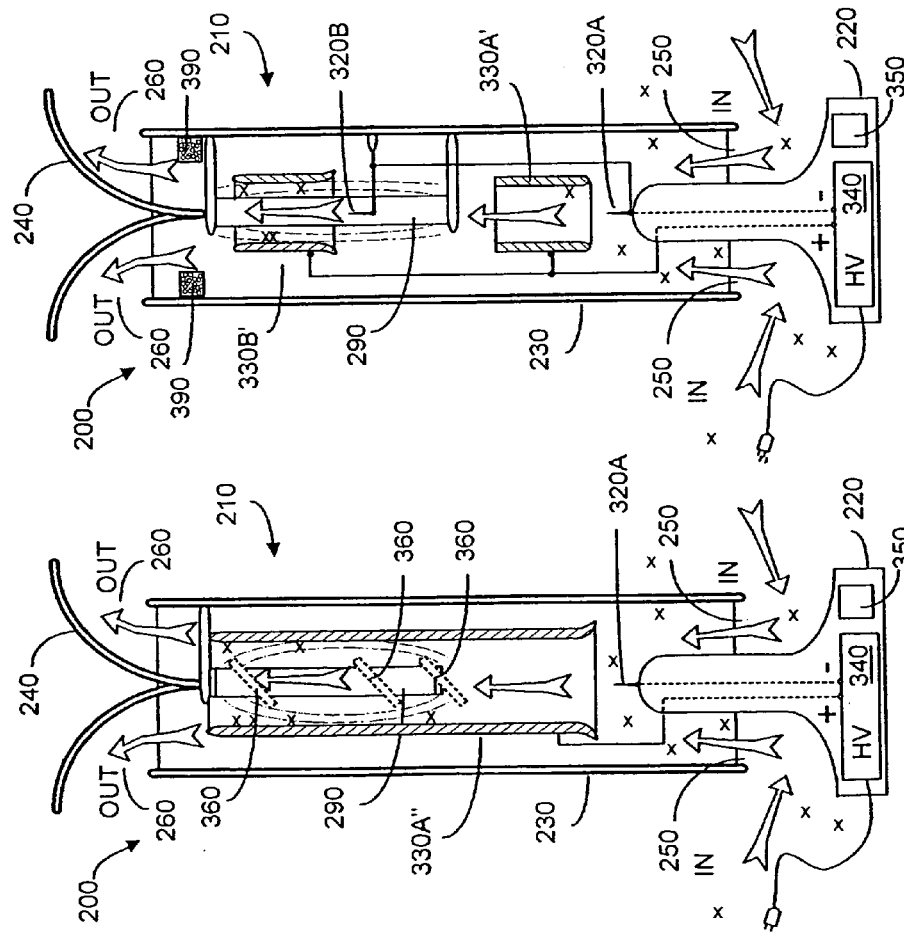


FIG. 2E


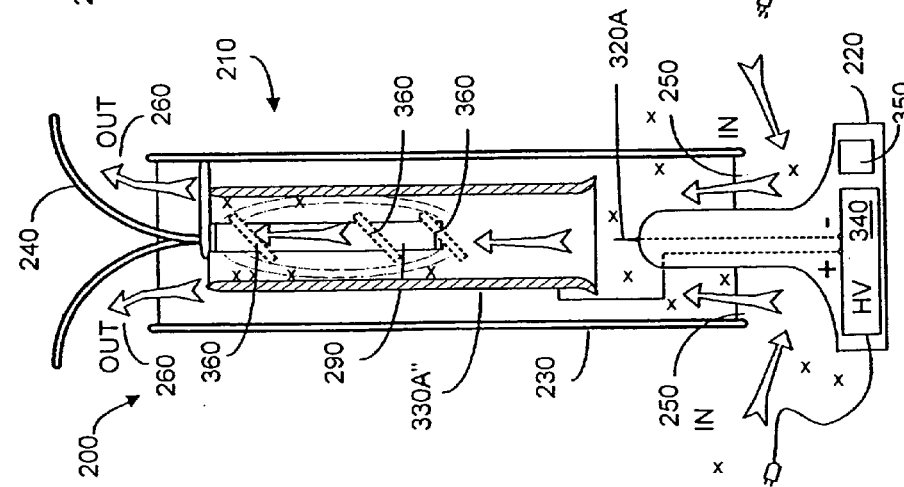


FIG. 2F



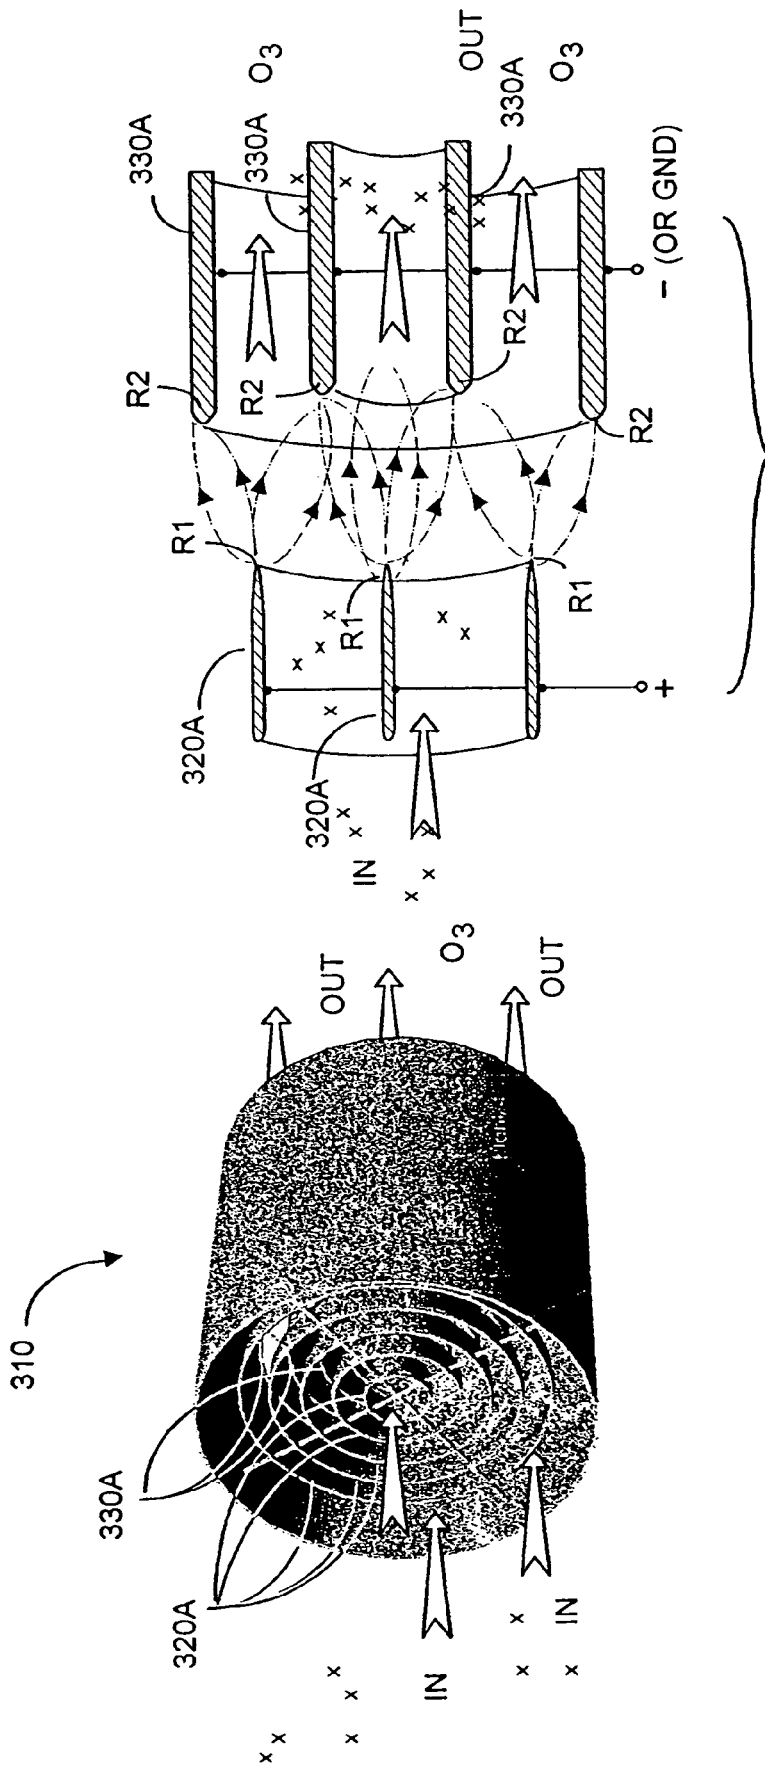

TO 340

FIG. 3B

FIG. 3A

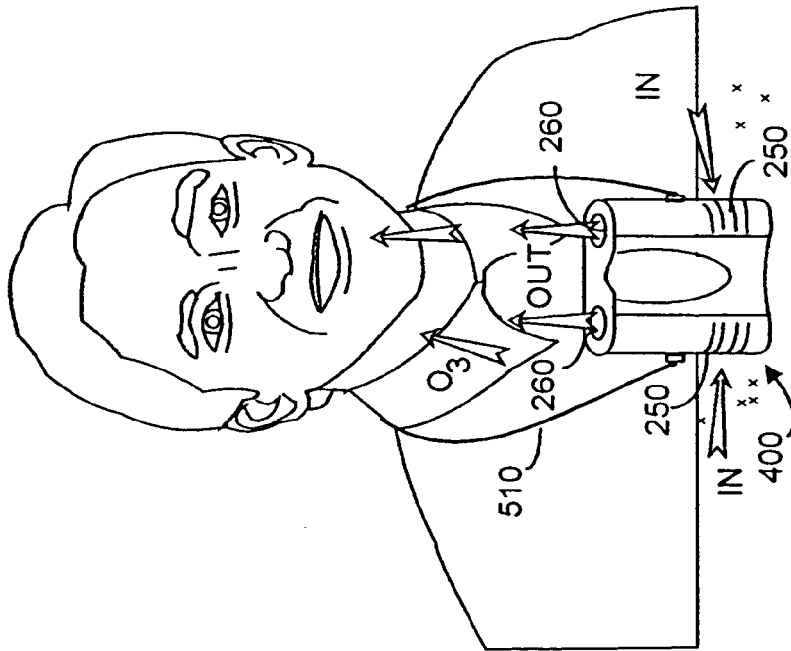


FIG. 4B

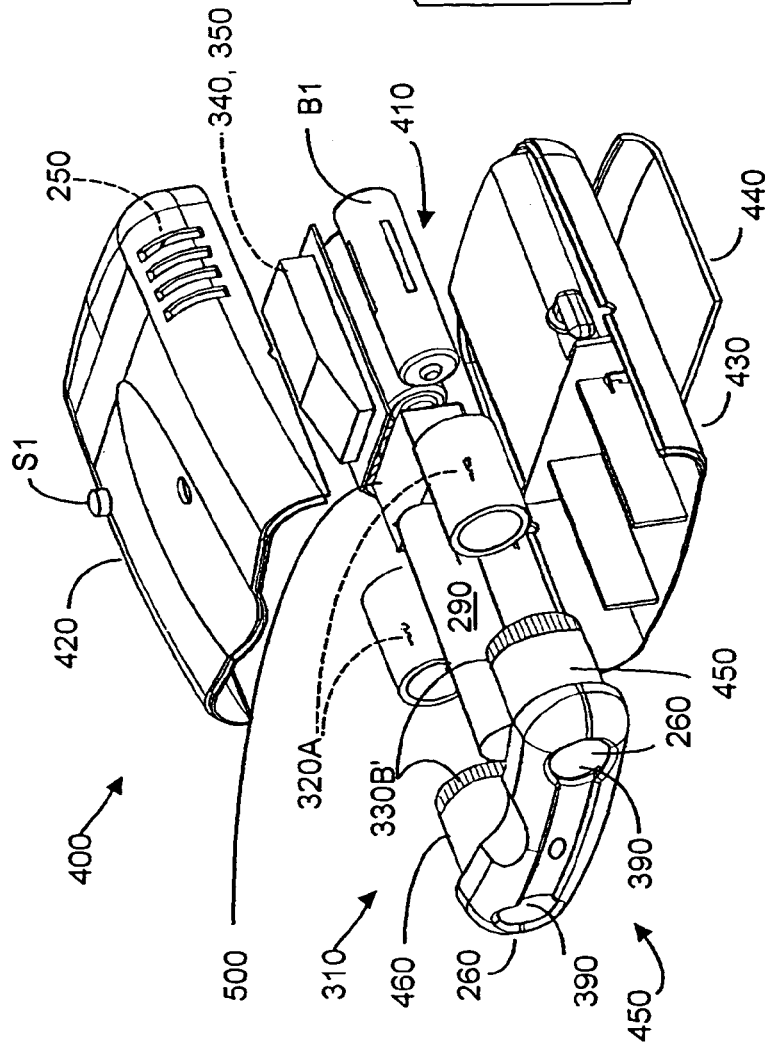


FIG. 4A

1

# AIR TRANSPORTER-CONDITIONER DEVICE WITH TUBULAR ELECTRODE CONFIGURATIONS

## REFERENCE TO RELATED APPLICATION

This application is a continuation of, and claims priority to, U.S. patent application Ser. No. 10/375,734, filed Feb. 27, 2003, entitled AIR TRANSPORTER-CONDITIONER DEVICE WITH TUBULAR ELECTRODE CONFIGURATIONS, now abandoned which is a continuation of, and claims priority to, U.S. patent application Ser. No. 09/774,198, filed Jan. 29, 2001, entitled ELECTRO-KINETIC DEVICE WITH ENHANCED ANTI-MICROORGANISM CAPABILITY, now U.S. Pat. No. 6,544,485, each of which is incorporated herein by reference.

## FIELD OF THE INVENTION

The present invention relates generally to devices that can condition the air in a room, including so-called electro-kinetic devices that output ionized air, typically accompanied by ozone ( $O_3$ ), and more specifically to providing such devices with enhanced ability to kill microorganisms, including germs, bacteria, and viruses in the room environment.

## BACKGROUND OF THE INVENTION

U.S. Pat. No. 6,163,098 to Taylor et al. and U.S. Pat. No. 4,789,801 to Lee describe various devices to generate a stream of ionized air using so-called electro-kinetic techniques. In some applications, the electro-kinetic devices may be small enough to be handheld, and in other applications electro-kinetic devices may be large enough to condition the air in a room. In overview, electro-kinetic techniques use high electric fields to ionize air molecules, a process that produces ozone ( $O_3$ ) as a byproduct. Ozone is an unstable molecule of oxygen that is commonly produced as a byproduct of high voltage arcing. In safe concentrations, ozone can be a desirable and useful substance. But ozone by itself may not be effective to kill microorganisms such as germs, bacteria, and viruses in the environment surrounding the device.

FIG. 1 depicts a generic electro-kinetic device 10 to generate ozone. Device 10 includes a housing 20 that typically has at least one air input port 30 and at least one air output port 40. Within housing 20 there is disposed an electrode assembly or system 50 comprising a first electrode array 60 having at least one electrode 70 and comprising a second electrode array 80 having at least one electrode 90. System 10 further includes a high voltage generator 100 coupled between the first and second electrode arrays. Electrodes 70 and electrodes 90 may have a variety of shapes. For example, electrodes 70 may be thin electrical wires, and electrodes 90 may be larger wires, rods, or other shapes. Electrodes 70 may be pointed or pin-like, and electrodes 90 may be curvilinear, including ring shaped, or may comprise a conductive plate with curved or ring-like openings formed in the plate. Electrodes 90 typically are symmetrically disposed relative to electrodes 70. For example, if there are three electrodes 70 in first electrode array 60, there might be two electrodes 90 in second electrode array 80, wherein electrodes 90 are staggered to be equidistant from the nearest electrodes 70. In the pin and ring type configurations, electrodes 90 are preferably concentric with electrodes 70.

In the various configurations, all of the electrodes are electrically conductive material, metal for example. Electrodes 90 preferably have a larger radius than electrodes 70, with the

2

result that a large electric field is created at or adjacent electrodes 90 upon application of high voltage (typically several kV) from generator 100. As a result ozone and ionized particles of air are generated within device 10, and there is an electro-kinetic flow of air in the direction from the first electrode array 60 towards the second electrode array 80. In FIG. 1, the large arrow denoted IN represents ambient air that can enter input port 30. The small "x's" denote particulate matter that may be present in the incoming ambient air. The air movement is in the direction of the large arrows, and the output airflow, denoted OUT, exits device 10 via port 40. An advantage of electro-kinetic devices such as device 10 is that an air flow is created without using fans or other moving parts to create the air flow.

Preferably particulate matter x in the ambient air can be electrostatically attracted to the second electrode array 80, with the result that the outflow (OUT) of air from device 10 not only contains ozone and ionized air, but can be cleaner than the ambient air. In such devices, it can become necessary to occasionally clean the second electrode array electrodes 80 to remove particulate matter and other debris from the surface of electrodes 90. Thus, device 10 in FIG. 1 can function somewhat as a fan to create an output air flow, but without requiring moving parts. Ideally the outflow of air (OUT) is conditioned in that particulate matter is removed and the outflow includes safe amounts of ozone, and some ions.

But an outflow of air containing ions and ozone may not destroy or reduce microorganisms such as germs, bacteria, fungi, viruses, and the like, collectively hereinafter "microorganisms". It is known in the art to try to destroy such microorganisms with so-called germicidal lamps. Such lamps emit ultra violet radiation having a wavelength of about 254 nm. For example, devices to condition air using mechanical fans, HEPA filters, and germicidal lamps are sold commercially by companies such as Austin Air, C.A.R.E. 2000, Amaircare, and others. Often the devices are somewhat cumbersome, and have size and bulk of a small filing cabinet. In such devices, care must be taken to ensure that ultraviolet radiation from the germicidal lamp cannot be viewed by nearby persons, to prevent eye injury. Although such fan-powered devices can reduce or destroy microorganisms, the devices tend to be bulky, and are not necessarily silent in operation.

What is needed is a device to condition air in a room that can operate relatively silently to remove particulate matter in the air, that can preferably output safe amounts of ozone, and that can also kill or reduce microorganisms such as germs, fungi, bacteria, viruses, and the like.

The present invention provides such a device.

## SUMMARY OF THE PRESENT INVENTION

In a first aspect, the invention provides an electro-kinetic ionizing device with a baffle mechanism and a germicidal lamp housed within the device such that the baffle mechanism precludes lamp ultraviolet radiation from being viewed by humans. In one configuration, the germicidal lamp is disposed vertically within a somewhat tubular housing, with an array of first and second electrodes disposed axially at one lamp end. In an alternative embodiment, there is an array of first and second electrodes disposed axially at each lamp end. In the various embodiments, intake and outlet vents at each end of the housing promote flow of electro-kinetically moved air without permitting viewing of the lamp radiation.

Preferred electrode array configurations include pin-ring and elongated pin-ring electrodes, including pin electrodes formed from an arc or ring of tapered conductive material,

and symmetrically disposed arrays of electrodes formed as a single component. The electrodes in an array preferably are symmetrically disposed with respect to each other, and like in the air flow path. Efficacy of the germicidal lamp in destroying bacterial, virus, germs, etc. in the air flow appears to be proportional to the length of time the airflow is subjected to radiation from the lamp. Thus the preferred embodiments of the invention dispose the longitudinal axis of the germicidal lamp parallel to the long axis of the electro-kinetic device.

If desired, moisture containing material such as Porex may be included to augment moisture content in the outflow of conditioned air. In one embodiment, a personal-sized portable device is provided that includes electro-kinetically generated airflow with ions and ozone in the output, reduced particulate matter in the output airflow, and with reduced or eliminated microorganisms as a result of ultraviolet radiation generated from a germicidal type lamp within the device. In an alternative embodiment, the electro-kinetic components may be replaced by a small battery operated fan, to yield a personal device that outputs air substantially devoid of microorganisms. A Porex type element may also be included to allow a user to augment moisture content in the air outflow.

Other features and advantages of the invention will appear from the following description in which the preferred embodiments have been set forth in detail, in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 depicts a generic electro-kinetic conditioner device that outputs ionized air and ozone, according to the prior art;

FIGS. 2A-2F depict embodiments of electro-kinetic conditioner devices with enhanced ability to diminish, inhibit, or destroy microorganisms such as germs, bacteria, and viruses, according to the present invention;

FIG. 3A is a view of an electrode system comprising concentric rings of first array electrodes and second array electrodes, according to the present invention;

FIG. 3B is a simplified cross-sectional side view of a portion of an electrode system such as shown in FIG. 3A, according to the present invention;

FIG. 4A is a breakaway view of a personal conditioner device that includes a germicidal lamp, a moisture-enhancing component, and an electro-kinetic air mover and/or an electric fan air mover, according to the present invention; and

FIG. 4B depicts the device of FIG. 4A, worn around the neck of a user, according to the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 2A depicts a first embodiment of a device **200** that provides electro-kinetic conditioning of ambient air, with improved ability to diminish or destroy microorganisms including bacteria, germs, and viruses. As will now be described, device **200** takes ambient air (IN) that may include such microorganisms, as well as particulate matter (depicted as x). Further, without using moving components, device **10** outputs conditioned air (OUT) that has at least some particulate matter removed, that includes ions, safe amounts of ozone, and is free of such microorganisms.

Device **200** includes a housing **210** that comprises a base portion **220**, a main portion **230**, and an upper portion **240** that also serves as a light baffle. Housing **210** includes at least one ambient air intake vent **250**, and at least one conditioned air outlet vent **260**. As used herein, it will be understood that intake vent **250** is "upstream" relative to outlet vent **260**, or

that outlet vent **260** is "downstream" from intake vent **250**. "Upstream" and "downstream" describe the general flow of air into, through, and out of device **200**, as indicated by the large hollow arrows.

One role of housing **210** is to prevent a nearby human, shown as **270**, from viewing preferably ultraviolet (UV) radiations or emanations **280** generated by a UV lamp **290** disposed within the housing. UV lamp **290** is a so-called UV-C lamp that preferably emits radiation having wavelength of about 254 nm, which wavelength is effective in diminishing or destroying bacteria, germs, and viruses to which it is exposed. Lamps **290** are commercially available, for example the Phillips model TUO 25W/G25 T8, a 25 W tubular lamp measuring about 25 mm in diameter by about 43 cm in length. Another suitable lamp is the Phillips TUO 8WG8 T6, an 8 W lamp measuring about 15 mm in diameter by about 29 cm in length. Other lamps that emit the desired wavelength may instead be used.

The efficacy of radiation **280** upon microorganism depends upon the length of time such organisms are subjected to the radiation. Thus in the preferred embodiments, lamp **290** is disposed within housing **210** such that the longitudinal axis of the lamp is parallel to the upstream-to-downstream airflow within the housing.

In the configuration of FIG. 2A, lamp **210** is disposed parallel to but not coaxially with the airstream that is created preferably electro-kinetically within device **200**. An electro-kinetic airflow is created in the following fashion. Electrode assembly **310** comprises a first electrode array **320A** and a second electrode array **330A**. In the embodiment of FIG. 2A, array **320A** comprises a single pin-type electrically conductive electrode that preferably terminates in a point. In FIG. 2A, array **330A** comprises a ring-like electrode that may be constructed from an electrically conductive cylinder. Preferably the edges of this electrode facing electrode **320A** are somewhat rounded such that the effective radius R2 of these edges is much larger than the effective radius R1 of electrode **320A**. The ratio R2:R1 should be at least ten, and preferably fifteen or more.

A high voltage pulse generator **340** is coupled between electrodes in the first electrode array **320A** and electrodes in the second electrode array **330A**. Generator **340A** receives low input voltage, e.g., 115 VAC to 230 VAC or in some embodiments battery-supplied 6 VDC to 12 VDC and generates high voltage pulses of at least 10 KV peak-to-peak with a repetition rate of about 20 KHz. The pulse train output preferably has a duty cycle of perhaps 10%, especially in battery-operated embodiments, but may have other duty cycles including 100% duty cycle. High voltage pulse generator **340** may be implemented in many ways, and typically will comprise a low voltage oscillator operating at perhaps 20 KHz frequency that outputs low voltage pulses to an electronic switch such as a thyristor. The thyristor or other switch couples the low voltage pulses to the input winding of a step-up transformer whose secondary winding is coupled to a high voltage multiplier circuit outputting the high voltage pulses. The various circuits and components comprising high voltage pulse generator **340** may be fabricated on a printed circuit board mounted within housing **210**, for example in the housing base portion **220**.

As shown in FIG. 2A, device **200** may include additional circuitry **350**, for example a voltage conditioner to provide proper operating voltage for lamp (or lamps) **290**, a circuit to allow device **200** to function for a certain amount of time, etc.

In the embodiment of FIG. 2A, the positive output terminal of generator **340** is coupled to the second electrode array **330A**, and the negative output terminal is coupled to the first

5

electrode array **320A**. This coupling polarity has been found to work well, including minimizing unwanted audible electrode vibration or hum. However the opposite polarity could instead be used, e.g., negative port of generator **340** coupled to electrode(s) **330A** and positive port coupled to electrode(s) **320A**. As noted, the geometry of electrode(s) **320A** is such that at least one relatively narrow or sharp point terminus exists. As one consequence, when voltage or pulses from high voltage pulse generator **340** are coupled across the first and second electrode arrays, it is believed that a plasma-like field is created surrounding first array electrode(s) **320A**. This electric field ionizes the ambient air between the first and second electrode arrays and establishes an "OUT" airflow that moves in a downstream direction, towards the second array electrode(s) **330A**. It is understood that the IN flow of ambient air can enter via vent(s) **250**, that the electro-kinetically generated air flows in the direction of and at least partially through electrode(s) **330A**, that the air flow is subjected to UV radiation **280**, and exits device **200** as OUT, via one or more outlet vents **260**. In the process, particulate matter (shown as x) entrained in the air flow can become electrostatically attached to the surface of electrode(s) **330A**, as indicated in FIG. 2A.

It is believed that ozone and ions are generated simultaneously by the first array electrode(s) **320A**, essentially as a function of the potential from generator **340** coupled to the first array. Ozone generation may be increased or decreased by increasing or decreasing the potential at the first array. Coupling an opposite polarity potential to the second array electrode(s) **330A** essentially accelerates the motion of ions generated at the first array, producing the air flow denoted as "OUT" in the figures. As the ions move toward the second array, it is believed that they push or move air molecules toward the second array. The relative velocity of this motion may be increased by decreasing the potential at the second array relative to the potential at the first array.

For example, if +10 KV were applied to the first array electrode(s), and no potential were applied to the second array electrode(s), a cloud of ions (whose net charge is positive) would form adjacent the first electrode array. Further, the relatively high 10 KV potential would generate substantial local concentration of ozone. By coupling a relatively negative potential to the second array electrode(s), the velocity of the air mass moved by the net emitted ions increases, as momentum of the moving ions is conserved. This air movement dilutes the ozone concentration adjacent the first array electrodes, allowing the ozone concentration to be maintained at safe levels.

On the other hand, if it were desired to maintain the same effective outflow (OUT) velocity but to generate less ozone, the exemplary 10 KV potential could be divided between the electrode arrays. For example, generator **340** could provide +4 KV (or some other fraction) to the first array electrode(s) and -6 KV (or some other fraction) to the second array electrode(s). In this example, it is understood that the +4 KV and the -6 KV are measured relative to ground. Understandably it is desired that the present invention operate to output safe amounts of ozone. Accordingly, the high voltage is preferably fractionalized with about +4 KV applied to the first array electrode(s) and about -6 KV applied to the second array electrodes.

As noted, outflow (OUT) preferably includes safe amounts of  $O_3$  that can destroy or at least substantially alter bacteria, germs, and other living (or quasi-living) matter subjected to the outflow. In preliminary experiments, it appears that subjecting the airstream to UV radiation **280** can somehow reduce the concentration of  $O_3$  that is present in the OUT flow.

6

Possibly the UV radiation hastens the disassociation of oxygen atoms comprising the ozone, but applicants have not thoroughly investigated this phenomenon. Understandably decreasing  $O_3$  concentration, e.g., through use of UV lamp **290**, can permit a higher velocity of OUT airflow, without necessarily increasing  $O_3$  to undesirably high concentrations.

In the embodiment of FIG. 2A, device **200** has a cylindrical-shaped housing that is about 24" tall, and about 6" in cross-section or diameter. Input and output vents **250**, **260** are preferably are each shaped as an annulus with an opening height of perhaps 0.5", although other configurations could be used. The housing preferably is made from a lightweight inexpensive material, ABS plastic for example. The lower surface of upper housing member **240** may be formed with a non-smooth finish or a non-light reflecting finish or color, to minimize a user **270** viewing reflected radiation **280** from lamp **290**. As suggested by FIG. 2A, housing portion **240** preferably has a curved shape to direct the OUT airflow from a vertical orientation to an orientation that includes a horizontal component.

Ring-like electrode(s) **330A** preferably have a cross-section or diameter of perhaps 2" to 4" and a length (upstream to downstream) of about 4" to 6". The electrode(s) may be formed from a cylinder or tube of metal, aluminum, stainless steel, etc. The pointed electrode(s) **320A** are preferably made from a durable conductor such as tungsten, the better to withstand ionization effects. The length of the pointed portion of electrode(s) **320A** is preferably at least 0.5", and the spaced-apart distance from the distal tip of electrode(s) **320A** to the preferably curved or circular opening formed in electrode(s) **330A** is about 1". Especially good electro-kinetic transport action can result when electrode(s) **320A** are substantially coaxially and symmetrically disposed with respect to electrode(s) **330A**. Thus, in FIG. 2A, the longitudinal axis of electrode(s) **320A** and **331A** are substantially coaxial.

Preferably operating parameters of the present invention are set during manufacture and are not user-adjustable. For example, increasing the peak-to-peak output voltage and/or duty cycle in the high voltage pulses generated by unit **340** can increase air flowrate, ion content, and ozone content. In the preferred embodiment, output flowrate is at least about 200 feet/minute, ion content is about 2,000,000/cc and ozone content is about 40 ppb (over ambient) to perhaps 2,000 ppb (over ambient). As described herein, decreasing the second electrode/first electrode radius of curvature R2/R1 ratio below about 20:1 will decrease flow rate, as will decreasing the peak-to-peak voltage and/or duty cycle of the high voltage pulses coupled between the first and second electrode arrays.

Within device **200**, the electro-kinetically created airstream is subjected to sufficient radiation from lamp **290** for a sufficiently long time to substantially diminish if not destroy microorganisms that were present in the incoming ambient air. Thus, the output air (OUT) is conditioned in that particulate matter tends to precipitate electrostatically to the surface of electrode(s) **330A** and be removed from the airflow, and microorganisms such as germs, fungi, bacteria, and viruses are substantially if not completely removed. Some ions are present in the output air, which can be beneficial, as are safe amounts of  $O_3$ . Occasionally it may be desirable to clean electrode(s) **330A** so as to remove deposited particulate matter x from the electrode surface.

In the embodiment of FIG. 2B, electrical leads from lamp **290** to circuit **350** are omitted for ease of illustration, and lamp **290** is now shown disposed substantially coaxially with the electrode system **310** and with the airflow. It is understood that an advantage of coaxial lamp mounting is that essentially all of the radiated UV **280** may affect the airflow, whereas in

the embodiment of FIG. 2A, some of the radiation must reflect from the interior wall surface of housing portion 230 before it can affect any portion of the airflow. If desired, multiple lamps 290 may be used, including at least one lamp mounted off-axis (e.g., FIG. 2A) and one lamp mounted coaxially (e.g., FIG. 2B).

Note too in FIG. 2B that the edges of electrode(s) 330A' facing upstream (e.g., towards electrode(s) 320A) have been chambered or rounded. Chambering is a preferred implementation of electrode(s) 330A in that beginning at the electrode regions facing electrode(s) 320A and continuing toward the opposite, downstream direction, a smooth and continuous second electrode array electrode surface is presented.

In the configuration of FIG. 2C, electrode(s) 320A are implemented using a portion of carbon or other material 320A' that terminates in a plurality of individual fibers, as shown. Various of the fibers act as individual pointed or pin-like electrodes. In the embodiment shown in FIG. 2C, the various fibers are essentially coaxially disposed with respect to ring-like electrodes 330A or 330A'.

FIG. 2D depicts a configuration in which ring-like electrode(s) are configured as 330A", a rather elongated cylindrical member with a smoothly outwardly flared edge in the upstream direction. In this configuration it can be advantageous to mount lamp 290 from one end. Again, for ease of illustration, electrical wires coupling lamp 290 to its power source have been omitted from the drawing. Note the inclusion of optional vanes 360, disposed within housing 210 so as to intentionally retard velocity of the airflow. These vanes can impart a vortex-like spin to the moving air, slowing the rate of flow, which increases the effective dwell time that UV radiation 280 from lamp 290 can act upon the airstream. It is understood that vanes 360 may also be included in the other configurations described, and to be described. In FIG. 2D, the diameter of electrode(s) 330A" may be 4" or so, and the length may be 12" or so, although other dimensions may be used. While FIG. 2D depicts electrode(s) 330A" as coupled to the positive port of high voltage pulse generator 340, it is understood that polarity of the pulses coupled to the first array and second array electrodes may in fact be reversed from what is shown.

FIG. 2E depicts a cascade configuration of first and second array electrodes that has been found to reduce audible hissing-like noise that can emanate from device 200. In this configuration, a pair of first array electrodes 320A, 320B are electrically series coupled to one port of high voltage generator 340, and a pair of second array electrodes 330A', 330B' are electrically series coupled to the other port of high voltage generator 340. The electrodes within a pair are preferably substantially symmetrically or coaxially disposed with respect to each other. Thus, electrode 320A is symmetrically and in this case also coaxially disposed with respect to electrode 330A', and electrode 320B is symmetrically and in this case also coaxially disposed with respect to electrode 330B'. Differently shaped ring-like electrodes 330A' and 330B' are depicted to suggest the relative freedom of design that exists. However in the various configurations, the R2/R1>10 ratio described earlier is preferably met.

Also shown in FIG. 2E is an optional ring (or other configuration) of moisture-retaining material 390, disposed adjacent at least one outlet port 260 as to present the least resistance to the outflow of air. In the preferred embodiment, moisture-retaining member 390 is a hollow collar-like cylinder, perhaps 0.125" thick of Porex™ UHMW X-4901 material, that can be moistened with water, with scent, perhaps with medication (e.g., asthma medication). Such material has a polyethylene base, exhibits a wicking action, and can absorb

and retain substantial amounts of moisture. A user can periodically moisten this material, and the outflow of air (OUT) can contain not only beneficial amounts of ozone, some ions, relatively little particulate matter, and preferably little or no microorganisms, but may have increased humidity, if so desired by a user. Such material 390 maybe included in the other configurations of the present invention described herein.

FIG. 2F depicts a configuration of the present invention in which housing 210 provides intake ports or vents 250 at an upper region and output ports or vents 260 at a lower region. In this configuration, germicidal UV lamp 290 is shown disposed in a lower region of the housing. Although FIG. 2F depicts a specific configuration of pin-like and ring-like electrodes, it is understood that other electrode configurations and/or additional electrode configurations could be used to establish a desired electro-kinetic airflow, to establish precipitation of particulate matter x in the incoming ambient air, to output ions, and to output safe amounts of ozone. Note that a collar or other configuration of moisture containing material 260 may optionally be provided.

Turning now to FIGS. 3A and 3B, a compact configuration for an electrode system 310 is shown that can create the same total volume of air flow as can be generated from larger configuration electrode systems. The system is especially robust and can be removed from a device housing and cleaned of accumulated particulate particles and other matter, by being washed in an ordinary household dishwasher. FIG. 3B depicts force field lines resulting from application of high voltage from generator 340 across the electrode system.

In the configuration of FIG. 3A, a plurality of concentrically disposed first array electrodes 320A are disposed upstream from a plurality of concentrically disposed second array electrodes 330A. As best seen in FIG. 3B, the distal ends (the ends facing downstream or to the right in the figure) preferably are tapered or pointed or sharp. To depict the flexibility of design, the tapered distal end points of the first array electrodes 320A are shown essentially flush with each other in FIG. 3B, although they could instead be staggered. By contrast, the upstream facing preferably curved distal ends of second array electrodes 330A are shown staggered, although they could instead be flush with each other.

The first array electrodes 320A may be machined or otherwise formed from a durable metal, and are connected to each other electrically and to one output port of high voltage pulse generator 340, for example the positive port. The second array electrodes 330A similarly are formed from a durable metal and are connected to each other electrically and to the other end of the high voltage pulse generator 340. In this configuration as in the other electrode configurations, it is understood that one of the output ports or terminals of high voltage pulse generator 340 may in fact be at the same potential as ambient air.

The configuration shown in FIG. 3A may be perhaps 6" to 8" in outer diameter, perhaps 4" to 10" in length, with a spacing between adjacent concentric rings of elements 320A or of elements 330A of perhaps 0.25" to 0.5". Other dimensions may instead be used, however. If desired, the configuration of FIG. 3A may be slightly modified to use offset spiral configurations for electrodes 320A and for 330A. Spiral configurations can simplify manufacturing as well as the electrically connections to the electrodes.

As shown in FIG. 3B, particulate matter (depicted as x) in the incoming air (IN) will tend to electrostatically adhere to the surface of the downstream second array electrodes 330A. The output airflow (OUT), however, will be relatively free of such particulate matter, and will contain ions and safe

amounts of O<sub>3</sub>. Further, the presence of a germicidal-type UV lamp **290** (not shown in FIGS. **3A**, **3B**) will ensure that microorganisms present in the incoming air will be substantially eliminated in the air outflow (OUT). It is further understood that, if desired, a ring or rings (or other configuration) of moisture retaining material **390** may be disposed, preferably adjacent a downstream portion of electrode assembly **310**.

FIG. **4A** is a perspective, breakaway view of a battery operable personal device **400**, showing housing **410** as comprising an upper housing member **420** that includes intake vents **250**, a lower housing member **430** and can house, among other components, batteries **B1** to power device **400**, and includes a battery hatch **440** to provide access to **B1**. An ON/OFF switch **S1** can couple **B1** to the high voltage generator and circuitry **340**, **350** within housing **410**. Housing **410** further includes a front housing portion **450** and provides outlet vents **260**. In the preferred embodiment, the interior area of at least a portion of the outlet area includes foam like fluid-retaining material **260**, as described above, which material, when wet, can augment humidity of the output airflow OUT.

In the embodiment shown, airflow preferably is electrokinetically generated with an electrode system **310** that includes two pairs of electrode arrays. Alternatively, or in addition, a small DC-powered fan **500** may be included to create an airflow, albeit without generating ozone and/or ions. In FIGS. **4A**, pin-like and ring-like electrodes **320A** and **330B'**. First array electrodes **320A** may be as shown in FIG. **2A-2F**, and second array electrodes **330B'** preferably are flared, as shown in FIG. **2E**. Each pin-like or pointed electrode **320A** is upstream and preferably coaxial from a ring-like electrode **330B'**. A collar of moisture retaining material **390** is disposed within housing portion **450** so as to be subjected to the airflow passing through the smooth and continuous interior surface of an adjacent electrode **330B'**.

Device **400** further includes a germicidal type UV lamp **290**, such as described earlier herein. Lamp **290** is disposed within housing **410** so that the airflow (whether created electrokinetically or by fan **500**) is subjected to UV radiation from the lamp.

FIG. **4B** shows device **400** suspended from the neck of a user by a cord **510**. The battery operated device **400** lends itself to use in crowded areas such as motor vehicles, airplanes, etc. where the ambient air might be less than pristine. The inclusion of lamp **290** within device **400** will promote the destruction of germs, bacteria, fungi, viruses in the output airflow (OUT). The electro-kinetic generation of the airflow promotes silent operation of device **400**, serves to output air that has been at least partially cleaned of particulate matter, and that can include ions and/or ozone. Further, the inclusion of wettable material **390** allows the wearer or user of device **400** to augment moisture in the outflow of air, and/or to add scented liquid and/or medication to further augment the nature and quality of the output airflow. Although device **400** is shown worn around a user's body in FIG. **4B**, device **400** may also be placed on an automobile dashboard and, if desired, powered from the vehicle battery.

Modifications and variations may be made to the disclosed embodiments without departing from the subject and spirit of the invention as defined by the following claims.

What is claimed is:

1. An apparatus for conditioning air, comprising:  
a housing defining an input port and an output port;  
an electro-kinetic system, disposed in the housing, to create an airflow moving from the input port to the output port, the electro-kinetic system including:  
a first electrode array;

a second electrode array; and

a high voltage generator adapted to provide a potential difference between the first electrode array and the second electrode array;

wherein the first electrode array is located closer to the input port than is the second electrode array, and the first electrode array includes a generally tubular electrode; and

wherein the second electrode array is located closer to the output port than is the first electrode array, and the second electrode array includes inner and outer generally tubular electrodes electrically connected to one another, with the inner electrode located at least partially within the outer electrode.

2. The apparatus of claim 1, wherein each of the generally tubular electrodes of the first and second electrode arrays include a generally circular cross section.

3. The apparatus of claim 1, wherein each of the generally tubular electrodes of the first and second electrode arrays comprises a hollow elongated cylinder.

4. The apparatus of claim 1, wherein each of the inner and outer generally tubular electrodes of the second electrode array has a distal edge that generally faces toward the first electrode array; the distal end of the inner electrode being substantially flush with the distal edge of the outer electrode.

5. The apparatus of claim 1, wherein each of the inner and outer generally tubular electrodes of the second electrode array has a distal edge that generally faces toward the first electrode array; the distal edge of the inner electrode being staggered from the distal edge of the outer electrode.

6. The apparatus of claim 5, wherein the distal edge of the outer electrode of the second electrode array is located closer to the first electrode array than is the distal edge of the inner electrode of the second electrode array.

7. The apparatus of claim 1, wherein each of the inner and outer generally tubular electrodes of the second electrode array has a distal edge that tapers toward the first electrode array.

8. The apparatus of claim 7, wherein the generally tubular electrode of the first electrode array includes a distal edge that tapers toward the second electrode array.

9. The apparatus of claim 1, wherein each of the generally tubular electrodes of the first and second electrode arrays generally shares a common central axis.

10. The apparatus of claim 9, wherein a radius of the generally tubular electrode of the first electrode array is larger than a radius of the inner electrode of the second electrode array, but smaller than a radius of the outer electrode of the second electrode array.

11. The apparatus of claim 1, further comprising a germicidal ultraviolet lamp, disposed in the housing, adapted to emit radiation; wherein at least a portion of the airflow is subjected to at least a portion of radiation emitted by the lamp.

12. The apparatus of claim 11, wherein the housing is configured to preclude human viewing of radiation emitted directly from the lamp.

13. The apparatus of claim 12, wherein relative to air entering the input port, air exiting the output port of the housing has at least one of: (a) reduced levels of microorganisms; (b) reduced amount of particulate matter; (c) ions; and (d) ozone.

14. The apparatus claim 1, further including a wettable material disposed in the housing to augment the airflow with at least one of: (a) humidity; (b) scent; and (c) medicinal content.

15. The apparatus of claim 1, wherein:  
the first electrode array includes at least one additional generally tubular electrode, with each of the generally

## 11

tubular electrodes of the first electrode array being generally concentric and electrically connected to one another; and

the second electrode array includes at least one additional generally tubular electrode, with each of the generally tubular electrodes of the second electrode array being generally concentric and electrically connected to one another.

**16.** An apparatus for conditioning air, comprising:

a housing defining an input port and an output port;

an electro-kinetic system, disposed in the housing, to create an airflow moving from the input port to the output port, the electro-kinetic system including:

a first electrode array;

a second electrode array downstream from the first electrode array; and

a high voltage generator adapted to provide a potential difference between the first electrode array and the second electrode array;

wherein the first electrode array includes a generally tubular electrode; and

wherein the second electrode includes inner and outer generally tubular electrodes electrically connected to one another, with the inner electrode located substantially within the outer electrode.

**17.** The apparatus of claim 16, wherein each of the generally tubular electrodes of the first and second electrode comprises a hollow elongated cylinder.

**18.** The apparatus of claim 16, wherein each of the inner and outer generally tubular electrodes of the second electrode array have a distal edge that generally faces toward the first electrode array; the distal edge of the inner electrode being staggered from, rather than flush with, the distal edge of the outer electrode.

**19.** The apparatus of claim 16, wherein:

each of the generally tubular electrodes of the first and second electrode arrays generally shares a common central axis; and

wherein a radius of the generally tubular electrode of the first electrode array is larger than a radius of the inner electrode of the second electrode array, but smaller than a radius of the outer electrode of the second electrode array.

**20.** The apparatus of claim 16, comprising:

the first electrode array includes at least one additional generally tubular electrode, with each of the generally tubular electrodes of the first electrode array being generally concentric and electrically connected to one another; and

the second electrode array includes at least one additional generally tubular electrode, with each of the generally tubular electrodes of the second electrode array being generally concentric and electrically connected to one another.

**21.** An electro-kinetic system, comprising:

a first electrode array;

a second electrode array; and

a high voltage generator adapted to provide a potential difference between the first electrode array and the second electrode array;

wherein the first electrode array includes a generally tubular electrode; and

## 12

wherein the second electrode array includes inner and outer generally tubular electrodes electrically connected to one another with the inner electrode located substantially within the outer electrode.

**22.** The system of claim 21, wherein each of the generally tubular electrodes of the first and second electrodes includes a generally circular cross section.

**23.** The system of claim 21, wherein each of the generally tubular electrodes of the first and second electrodes comprises a hollow elongated cylinder.

**24.** The system of claim 21, wherein each of the inner and outer generally tubular electrodes of the second electrode array has a distal edge that generally faces toward the first electrode array; the distal edge of the inner electrode being substantially flush with the distal edge of the outer electrode.

**25.** The system of claim 21, wherein each of the inner and outer generally tubular electrodes of the second electrode array have a distal edge that generally faces toward the first electrode array; the distal edge of the inner electrode being staggered from, rather than flush with, the distal edge of the outer electrode.

**26.** The system of claim 25, wherein the distal edge of the outer electrode of the second electrode array is located closer to the first electrode array than is the distal edge of the inner electrode of the second electrode array.

**27.** The system of claim 21, wherein each of the inner and outer generally tubular electrodes of the second electrode array has a distal edge that tapers toward the first electrode array.

**28.** The system of claim 27, wherein the generally tubular electrode of the first electrode array includes a distal edge that tapers toward the second electrode array.

**29.** The system of claim 21, wherein each of the generally tubular electrodes of the first and second electrode arrays generally shares a common central axis.

**30.** The system of claim 29, wherein a radius of the generally tubular electrode of the first electrode array is larger than a radius of the inner electrode of the second electrode array, but smaller than a radius of the outer electrode of the second electrode array.

**31.** The system of claim 21, wherein:

the first electrode array includes at least one additional generally tubular electrode, with each of the generally tubular electrodes of the first electrode array being generally concentric and electrically connected to one another; and

the second electrode array includes at least one additional generally tubular electrode, with each of the generally tubular electrodes of the second electrode array being generally concentric and electrically connected to one another.

**32.** The system of claim 21, wherein the first and second electrode arrays are adapted to be placed in a housing of a freestanding apparatus for conditioning air.

**33.** The system of claim 21, wherein the first and second electrode arrays are adapted to be placed in a housing of a personal device for conditioning air, the housing including a compartment to store a battery capable of powering the high voltage generator.