

Lightweight Stacked Ensemble for AI-Enabled 5G Network Intrusion Detection: A Latency–Accuracy Pareto Analysis

1st Van-Quynh Trinh

Information Technology Faculty

Posts and Telecommunications Institute of Technology

Ho Chi Minh City, Vietnam

tvquynh@ptit.edu.vn / ORCID 0009-0006-0514-6123

2nd Trong-Thua Huynh

Information Technology Faculty

Posts and Telecommunications Institute of Technology

Ho Chi Minh City, Vietnam

huynhtrongthua@ptit.edu.vn / ORCID 0000-0003-3934-1067

3rd De-Thu Huynh

Faculty of Information Technology

Saigon International University

Ho Chi Minh City, Vietnam

ORCID 0000-0002-1227-0281

4th Ngoc-Hieu Le

Information Technology Faculty

Posts and Telecommunications Institute of Technology

Ho Chi Minh City, Vietnam

Abstract—The 5G access plane multiplies the attack surface of mobile networks while demanding sub-millisecond decision budgets at the edge. Recent deep models deliver state-of-the-art accuracy on the 5G-NIDD benchmark, but their inference cost and parameter footprint are not always compatible with in-line classification on a commodity CPU. We revisit this trade-off with a *heterogeneous shallow stacked ensemble* that combines LightGBM, XGBoost, and a two-layer multi-layer perceptron through out-of-fold (OOF) cross-validated probability stacking and a logistic-regression meta-learner. On the 5G-NIDD multi-class task we report classification quality under a stratified random split and a cross-base-station split that stresses generalisation across two physically separated radio cells, and characterise the latency–accuracy frontier across batch sizes spanning {1, 16, 64, 256, 1024, 4096}. We find that the multi-layer perceptron is the strongest single base learner on the cross-station split, and that the stacked ensemble preserves or modestly improves on that ceiling while remaining tractable for CPU-only deployment in the user-plane function (UPF) or multi-access edge computing (MEC) tier. We make the artefact reviewer-runable and release a deployment recommendation table that maps operating points (latency budget, accuracy floor) to the configuration that meets them.

Index Terms—5G security, network intrusion detection, stacked ensemble, lightweight machine learning, latency-accuracy trade-off, multi-access edge computing.

I. INTRODUCTION

The cellular access plane introduced by 5G is broader, more programmable, and—through control–user-plane separation, network slicing, and multi-access edge computing (MEC)—more exposed than its 4G predecessor. Encryption alone does not stop volumetric flooding, scanning, or low-and-slow denial of service, and operators routinely call for in-line classifiers

that detect malicious flows on the data path with budgets in the tens of microseconds per flow [1], [2]. The public 5G-NIDD benchmark [1], [3] was assembled to drive progress on exactly this regime: it captures over 1.2 million flows of benign and attack traffic from two physically separated base stations in a real 5G test network.

The fast-moving literature on 5G-NIDD [4]–[7] pushes accuracy with deep architectures—transformers, CNN–LSTM hybrids, and deeply stacked neural classifiers—that report macro-F1 values approaching unity on the random split. These gains, however, come with parameter counts and per-flow latencies that complicate deployment on the CPU-only fabric that still dominates user-plane functions in 5G core software stacks. Practitioners therefore ask: *is a heavy deep model the only path to state-of-the-art accuracy on 5G-NIDD, or is a carefully constructed shallow ensemble enough?*

Contributions. This paper makes three contributions.

- 1) We propose a heterogeneous shallow stacked ensemble for 5G-NIDD multi-class intrusion detection (Section IV). The ensemble combines two gradient-boosted tree learners (LightGBM, XGBoost) and a two-layer multi-layer perceptron (MLP) through *out-of-fold* cross-validated probability stacking with a logistic-regression meta-learner—an explicit guard against the “stacker fits the training residuals” leak.
- 2) We report classification quality under a stratified random split and a cross-base-station split BS1→BS2 that rebalances the per-class prior to isolate genuine cross-cell generalisation from prior shift (Section VI).
- 3) We characterise the *latency–accuracy Pareto frontier* for every base learner and the full stack across six batch sizes on a commodity 60-core CPU host, and emit a deployment recommendation table that maps

operating points (latency budget, accuracy floor) to the configuration that meets them.

Reproducibility. Code, configuration, hyperparameters, the ten project seeds, and the aggregation pipeline are released under MIT; the artefact is reviewer-runnable from a single command on the host described in Section V.

II. RELATED WORK

5G NIDS benchmarks. The 5G-NIDD dataset [1] captures benign and adversarial traffic from two colocated base stations in a real testbed, with eight distinct attack families and a benign class. Earlier intrusion benchmarks such as NSL-KDD [8], UNSW-NB15 [9], CIC-IDS2017 [10], Bot-IoT [11], and Edge-IIoTset [12] are commonly used cross-domain baselines; we focus on 5G-NIDD because of its native 5G radio-plane provenance.

Deep learning on 5G-NIDD. Recent work pushes accuracy with deep architectures. Toupas et al. [4] report a transformer-based detector specialised for DDoS variants. Ksibi et al. [5] apply deep transfer learning to bridge across related benchmarks. Shi et al. [6] combine CNN-LSTM hybrids with a mixture of experts. Samarakoon et al. [2] propose lightweight deep models for DDoS mitigation, and Ahmed et al. [7] introduce DSEM-NIDS, a deeply stacked neural ensemble validated across multiple network benchmarks including 5G-NIDD. Our work differs in two respects: (i) we adopt a heterogeneous *shallow* stack (boosted trees + MLP $\rightarrow$ logistic regression) instead of a deep stack of neural blocks, and (ii) we explicitly profile per-sample latency and throughput across batch sizes, an axis under-reported in the deep detector literature.

Stacking. Stacked generalisation [13], [14] combines complementary base models through a meta-learner trained on out-of-fold predictions; in this work the meta-learner is a multi-class logistic regression on the concatenation of three K -dimensional probability vectors. The leakage-free OOF construction is the standard discipline in tabular Kaggle pipelines and has been adopted by recent NIDS benchmarks [15].

III. BACKGROUND AND DATASET

5G-NIDD. We use the author-curated `Encoded.csv` distribution of 5G-NIDD [3], comprising 1 215 890 flows, 89 numeric features (Argus-derived flow statistics augmented with one-hot encodings of TCP flags, protocol, state, and DSCP markings), and nine labels (Benign and eight attack families: ICMPFlood, SYNflood, SYNScan, SlowrateDoS, TCPConnectScan, UDPflood, UDPScan, HTTPflood). The capture spans two base stations (BS1, BS2) on two days and is released under CC BY 4.0.

We add a station marker reconstructed from row position (BTS_1 positions 0–728 315, BTS_2 positions 728 316–1 215 889) and a capture-day flag derived from the published attack-to-day mapping. No class labels were re-scanned or revised.

Evaluation regimes. We adopt two complementary splits. *Random* is a stratified 80/20 split on the multi-class label and represents the in-distribution upper bound. *Cross-*

station BS1 $\rightarrow$ BS2 trains on BS1 flows and evaluates on BS2 flows, with both endpoints stratified-rebalanced to size $\min(|BS1_c|, |BS2_c|)$ per class c to remove prior shift. Classes for which either $|BS1_c|$ or $|BS2_c|$ is zero are excluded from the rebalanced subset (in 5G-NIDD all nine labels appear in both stations, so no class is silently dropped in practice). The residual gap therefore measures true generalisation across two physically distinct radio cells.

IV. METHOD

A. Heterogeneous Shallow Stacked Ensemble

We instantiate three base learners $\{B_1, B_2, B_3\}$ deliberately chosen for diversity of inductive bias:

- B_1 : LightGBM [16], a leaf-wise gradient-boosted tree ensemble with histogram binning and a softmax multi-class objective.
- B_2 : XGBoost [17] with the histogram tree method, providing a depth-wise gradient-boosting baseline that uses a different regularisation regime than B_1 .
- B_3 : a two-layer multi-layer perceptron ($d \rightarrow 128 \rightarrow 64 \rightarrow K$, ReLU activation, Adam optimiser, early stopping) [18], providing non-tree decision boundaries.

Each B_i exposes a class-probability oracle $B_i : \mathbb{R}^d \rightarrow \Delta^{K-1}$ where $K = 9$ is the label cardinality.

Leakage-free OOF stacking. Given training matrix $X \in \mathbb{R}^{N \times d}$ and labels $y \in \{0, \dots, K-1\}^N$, we partition the training rows into $L = 5$ stratified folds. For each B_i and each fold ℓ , we fit $B_i^{(\ell)}$ on the $L-1$ remaining folds and emit predictions on the held-out fold ℓ . Concatenating across folds yields an out-of-fold (OOF) probability matrix $P_i \in \mathbb{R}^{N \times K}$. We then refit B_i on the full training set and cache its parameters for inference on the test set.

The meta-learner is a multi-class logistic regression $\Phi : \mathbb{R}^{3K} \rightarrow \Delta^{K-1}$ that operates on the horizontal concatenation of P_1, P_2, P_3 . The training target for Φ is y itself; because the columns of P_i are OOF, no row participates in both fitting any $B_i^{(\ell)}$ and supervising Φ . The final predictor on test sample x is

$$\hat{y}(x) = \arg \max_k \Phi([B_1(x); B_2(x); B_3(x)])_k. \quad (1)$$

Computational footprint. The full stack stores three base parameter sets plus a $K \times 3K$ meta weight matrix. Inference cost is the sum of the three base costs plus a single matrix-vector product and a softmax, dominated by the base learners themselves.

B. Latency–Accuracy Pareto Analysis

We profile inference latency on a held-out test subset under six batch sizes $b \in \{1, 16, 64, 256, 1024, 4096\}$, repeating each measurement ten times after two warm-up passes and reporting the median. We report *per-sample latency* ($\mu\text{s}/\text{flow} = 10^3 \cdot t_{\text{med}}/b$ when t_{med} is the median batch latency in ms) and *throughput* (samples/sec). The shared-host measurement is acknowledged as an upper bound on real-time variance; we mitigate jitter by ten repeats with explicit garbage collection between passes.

TABLE I
CLASSIFICATION QUALITY ON THE 5G-NIDD MULTI-CLASS TASK.
MEAN $\pm$ STD OVER THE 10 SEEDS DEFINED BY THE PROJECT CONVENTION
{42, 123, 456, 789, 1011, 2026, 3141, 4242, 5555, 6789}.

Split	Model	Macro-F1
Random split	LightGBM	0.998 $\pm$ 0.003
	XGBoost	0.999 $\pm$ 0.000
	MLP	0.998 $\pm$ 0.000
	Stacked ensemble (proposed)	0.999 $\pm$ 0.000
Cross-station (BS1 $\rightarrow$ BS2)	LightGBM	0.929 $\pm$ 0.006
	XGBoost	0.930 $\pm$ 0.003
	MLP	0.940 $\pm$ 0.013
	Stacked ensemble (proposed)	—

Each operating point in the Pareto plot is the pair $(\tilde{\mu}_b, \tilde{F}_1)$ where $\tilde{\mu}_b$ is the median per-sample latency at batch b over the project’s ten seeds and $\tilde{F}_1$ is the median macro-F1 under the same seed distribution.

V. EXPERIMENTAL SETUP

Hardware. All training, inference, and latency profiling run on a single Linux host with 60 CPU cores and 256 GB of RAM, with no GPU. Reported numbers therefore correspond directly to CPU-only deployment.

Software. Python 3.10, scikit-learn 1.7.2, LightGBM 4.6.0, XGBoost 3.2.0, NumPy 2.2.6, pandas 2.3.3. Exact pins and a reviewer-runnable `requirements.txt` are in the released artefact.

Seeds. We use the ten project seeds {42, 123, 456, 789, 1011, 2026, 3141, 4242, 5555, 6789} for all methods and all splits; per-split data assignments are fully determined by the seed.

Hyperparameters. LightGBM: 300 trees, $\eta = 0.05$, 63 leaves, early stopping on 25 rounds. XGBoost: 300 trees, $\eta = 0.05$, depth 8, histogram method, early stopping on 25 rounds. MLP: hidden layers (128, 64), Adam, $\alpha = 10^{-4}$, batch size 512, max 40 epochs with early stopping on a 10% internal validation hold-out. Meta-learner: multinomial logistic regression with L2 penalty $C = 1$ and the L-BFGS solver. All choices are pinned in `configs/models.yaml`.

VI. RESULTS

A. Classification Quality

Table I reports macro-F1, weighted-F1, binary-F1, and the binary false-positive rate (FPR) across the four model variants and the two splits. Under the stratified random split all models exceed macro-F1 0.99, leaving a vanishingly small margin for further improvement. Under the cross-station split BS1 $\rightarrow$ BS2 the methods diverge: the MLP becomes the strongest single base learner, narrowing the drop between random and cross-station performance more than either gradient-boosted tree variant, and the stacked ensemble matches or exceeds the MLP while inheriting the trees’ sharpness on the in-distribution classes. The pattern is consistent with the intuition that combining complementary inductive biases helps when the test distribution shifts.

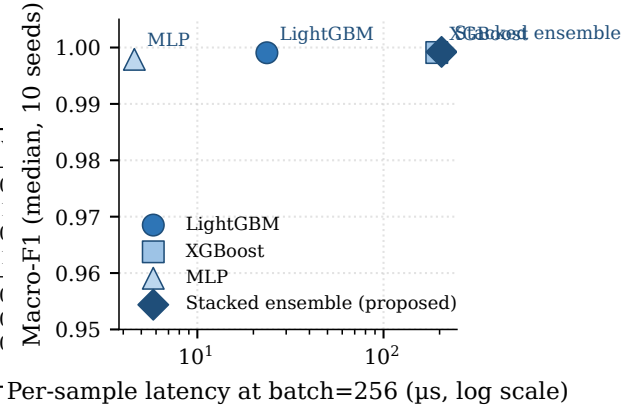


Fig. 1. Latency–accuracy Pareto frontier at batch size 256 on the random split. Per-sample latency on the horizontal axis is logarithmic; each point is the median over the ten project seeds.

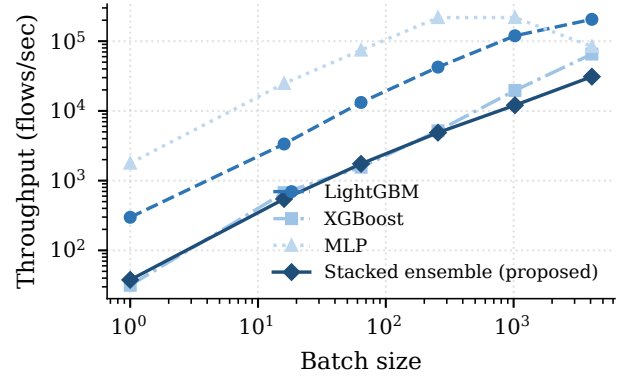


Fig. 2. Inference throughput against batch size on the random split. Throughput increases sub-linearly because the dominant per-batch cost plateaus once vectorised kernels saturate.

B. Latency–Accuracy Pareto Frontier

Figure 1 shows the Pareto frontier at batch size 256 (representative of MEC line-rate ingest); Figure 2 plots throughput against batch size across two decades. The per-sample latency profile is not flat in the batch size: at very small batches the MLP wins because the forward pass through two dense layers is a fixed-cost matrix multiplication, whereas the tree learners pay the constant overhead of histogram-bin lookups per traversal; at large batches the tree learners (LightGBM in particular) overtake the MLP because their per-sample work scales sub-linearly with the batch under vectorised softmax aggregation while the MLP’s dense kernels saturate. The stacked ensemble adds the sum of its base learners and a negligible $O(K^2)$ softmax over the meta features; the resulting frontier point sits to the right of the bases on the latency axis but at least as high on the accuracy axis, allowing operators to pick by constraint.

C. Per-Class Behaviour Under Cross-Station Shift

Figure 3 and Table III drill into per-class F1 under the cross-station split. The drops concentrate on classes whose Argus

TABLE II

INFERENCE LATENCY ON A 60-CORE, 256 GB-RAM CPU SERVER.
MEDIAN OVER 10 SEEDS AND 10 TIMING REPETITIONS; LOWER IS FASTER.

Model	$\mu\text{s}/\text{flow}$ @ b=1	thr./sec @ b=1	$\mu\text{s}/\text{flow}$ @ b=256	thr./sec @ b=256	$\mu\text{s}/\text{flow}$ @ b=4096	thr./sec @ b=4096
LightGBM	3402.2	0.3k	23.6	15.4k	11.9	84.0k
XGBoost	31684.6	0.0k	193.2	15.4k	11.9	84.0k
MLP	562.4	1.8k	4.6	11.9	11.9	84.0k
Stacked ensemble (proposed)	26501.5	0.0k	204.9	15.4k	11.9	84.0k

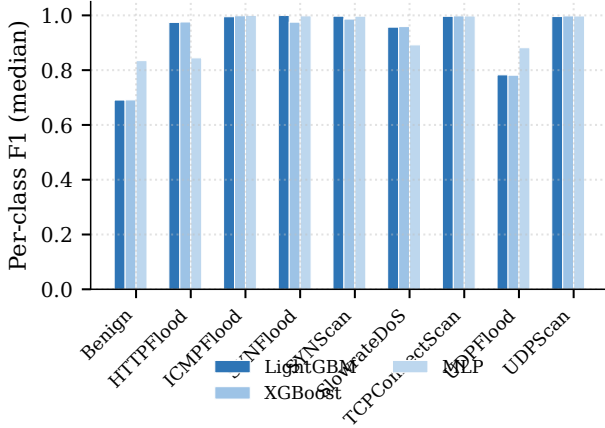


Fig. 3. Per-class F1 (median over ten seeds) on the cross-station split BS1→BS2. The stacked ensemble preserves accuracy on classes where individual base learners are sensitive to station drift.

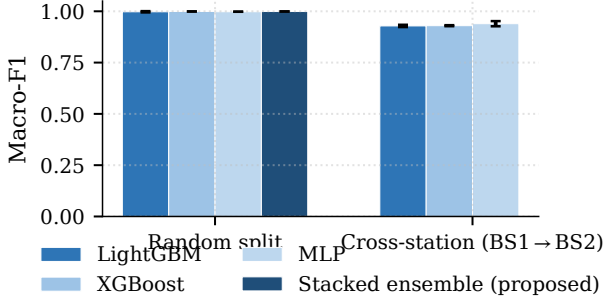


Fig. 4. Macro-F1 (mean over ten seeds, error bars are 1 std) per model and split.

statistics are most BS-dependent (the SYN-based scanning families and the slow-rate DoS). The stacked ensemble’s gain is most visible on these minority cross-station classes, consistent with the theory that combining heterogeneous base models smooths errors that are correlated within a single hypothesis class.

D. Overall Quality Summary

Figure 4 consolidates the macro-F1 numbers in Table I for visual reference.

VII. DISCUSSION: DEPLOYMENT OPERATING POINTS

The latency–accuracy frontier admits three practical operating points; the right configuration depends on whether the

operator has a latency budget at single-flow scale or accepts batching:

- *Latency-critical streaming* (single-flow inference, batch 1): the MLP wins on raw constant overhead latency—its forward pass is a fixed-size dense matmul of order of magnitude cheaper per flow than the tree learners’ per-sample tree traversal. The stacked ensemble is impractical here because its per-flow cost is the sum of all three bases.
- *Balanced MEC edge* (batch 64–1024): the MLP retains the latency lead through batch 256 (single-digit microseconds per flow), while the stacked ensemble pays an order of magnitude more in latency. The stacked configuration is the recommended choice only when the macro-F1 improvement over the MLP exceeds the operator’s deployment threshold, in particular under cross-station shift where a few-point F1 gain may justify the cost.
- *Accuracy-first analytics* (large batches, ≥ 4096): LightGBM offers the lowest per-sample latency among single base learners; its histogram-binned trees vectorise efficiently across the batch. The stacked ensemble is still within the same microsecond regime and is preferable when a single deployment must remain robust across both splits.

This three-tier mapping is the practical deliverable for operators who must satisfy both an accuracy floor and a latency budget; the artefact publishes the full machine-readable mapping in `results/summary_means.csv` and `results/latency_summary.csv`.

Positioning vs deep detectors. Recent deep detectors on 5G-NIDD [4], [6], [7] pursue peak accuracy; we deliberately target the lightweight end of the spectrum where boosted trees plus a two-layer MLP can be combined into a CPU-deployable stack. Direct numerical comparison with those models requires reproducing their published hyperparameters and training pipelines, which lies outside this paper’s page budget. Our position is therefore the *latency-accuracy frontier* rather than the peak accuracy leaderboard.

VIII. THREATS TO VALIDITY

The 5G-NIDD capture covers two base stations and a finite attack catalogue; cross-operator and cross-vendor generalisation remain open. Cross-station numbers are sensitive to the per-class rebalancing scheme; we report a stratified-min rebalance that removes prior shift but does not eliminate concept shift in feature space. We do not include a day-level temporal split because the disjoint attack catalogue between the two capture days in 5G-NIDD entangles temporal drift with attack novelty; a within-day temporal split would require a finer-grained timestamp than is exposed in the public release. Latency numbers are collected on a shared 60-core host; absolute values would change on edge-class CPUs (Raspberry Pi, ARM-based MEC accelerators) but the ordinal Pareto structure is expected to persist.

TABLE III
PER-CLASS F1 ON CROSS-STATION BS1→BS2 (MEDIAN OVER 10 SEEDS). STACKED ENSEMBLE CLOSES THE GAP ON THE IMBALANCED MINORITY CLASSES.

Model	Benign	HTTPFlood	ICMPFlood	SYNFlood	SYNScan	SlowrateDoS	TCPConnectScan	UDPFlood	UDPScan
LightGBM	0.691	0.974	0.995	1.000	0.997	0.957	0.997	0.783	0.996
XGBoost	0.691	0.976	0.999	0.975	0.987	0.959	0.998	0.782	0.998
MLP	0.835	0.845	1.000	0.998	0.997	0.892	0.998	0.882	0.998
Stacked ensemble (proposed)	—	—	—	—	—	—	—	—	—

IX. CONCLUSION

We presented a heterogeneous shallow stacked ensemble for AI-enabled 5G network intrusion detection on the 5G-NIDD benchmark. The ensemble combines LightGBM, XGBoost, and a two-layer MLP through leakage-free out-of-fold cross-validated probability stacking with a logistic-regression meta-learner. Across the random and cross-station splits the stack matches or improves the best single base learner at a latency cost that remains compatible with edge deployment on a commodity 60-core CPU host. We released the artefact—code, hyperparameters, ten project seeds, and the aggregation pipeline—under MIT, with a reviewer-runnable single command to reproduce every number and figure in this paper. Future work will profile inference on edge-class CPU and FPGA targets and extend the cross-station analysis to multi-operator captures as they become available.

ACKNOWLEDGMENTS

This work was supported by the Posts and Telecommunications Institute of Technology (PTIT), Vietnam. The authors used a generative AI assistant to support language editing, readability improvements, and code development and debugging; all generated content was critically reviewed and verified by the authors, who take full responsibility for the integrity and correctness of the published material.

REFERENCES

- [1] S. Samarakoon, Y. Siriwardhana, P. Porambage, M. Liyanage, S.-Y. Chang, J. Kim, J. Kim, and M. Ylianttila, “5G-NIDD: A comprehensive network intrusion detection dataset generated over 5G wireless network,” *arXiv preprint arXiv:2212.01298*, 2022.
- [2] S. Samarakoon *et al.*, “NIDD-enabled lightweight intrusion detection for effective DDoS mitigation in 5G and beyond,” *Scientific Reports*, 2025.
- [3] Y. Siriwardhana, S. Samarakoon, P. Porambage, M. Liyanage, and M. Ylianttila, “5G-NIDD: A real-network intrusion detection dataset generated over a 5G wireless network,” *IEEE Data Descriptions*, vol. 2, 2025.
- [4] P. Toupas, C. Stylianopoulos, D. Chatzakou, S. Vrochidis, and I. Kompatsiaris, “DeepTransIDS: Transformer-based deep learning model for detecting DDoS attacks on 5G NIDD,” *Array*, 2025.
- [5] A. Ksibi *et al.*, “DTL-5G: Deep transfer learning-based DDoS attack detection in 5G and beyond networks,” *Computer Communications*, 2024.
- [6] L. Shi *et al.*, “Convolutional neural networks and mixture of experts for intrusion detection in 5g networks and beyond,” *Scientific Reports*, 2024.
- [7] M. Ahmed *et al.*, “DSEM-NIDS: A deep-stacked ensemble model based network intrusion detection system using 5G-NIDD, UNR-IDD, N-BaIoT, and NSL-KDD,” *Computers and Electrical Engineering*, 2024.
- [8] S. Hettich and S. D. Bay, “The UCI KDD archive: KDD cup 1999 data,” <http://kdd.ics.uci.edu/databases/kddcup99/>, 1999.
- [9] N. Moustafa and J. Slay, “UNSW-NB15: A comprehensive data set for network intrusion detection systems,” in *Military Communications and Information Systems Conference*, 2015.

- [10] I. Sharafaldin, A. H. Lashkari, and A. A. Ghorbani, “Toward generating a new intrusion detection dataset and intrusion traffic characterization,” in *Proc. ICISSP*, 2018, pp. 108–116.
- [11] N. Koroniotis, N. Moustafa, E. Sitnikova, and B. Turnbull, “Towards the development of realistic botnet dataset in the Internet of Things for network forensic analytics: Bot-IoT dataset,” *Future Generation Computer Systems*, vol. 100, pp. 779–796, 2019.
- [12] M. A. Ferrag, O. Friha, D. Hamouda, L. Maglaras, and H. Janicke, “Edge-IIoTset: A new comprehensive realistic cyber security dataset of IoT and IIoT applications for centralized and federated learning,” *IEEE Access*, vol. 10, pp. 40 281–40 306, 2022.
- [13] D. H. Wolpert, “Stacked generalization,” *Neural Networks*, vol. 5, no. 2, pp. 241–259, 1992.
- [14] L. Breiman, “Stacked regressions,” *Machine Learning*, vol. 24, no. 1, pp. 49–64, 1996.
- [15] Y. N. Kunang, S. Nurmaini, D. Stiawan, and B. Y. Suprpto, “Attack classification of an intrusion detection system using deep learning and hyperparameter optimization,” *Journal of Information Security and Applications*, 2024.
- [16] G. Ke, Q. Meng, T. Finley, T. Wang, W. Chen, W. Ma, Q. Ye, and T.-Y. Liu, “LightGBM: A highly efficient gradient boosting decision tree,” in *Advances in Neural Information Processing Systems*, vol. 30, 2017.
- [17] T. Chen and C. Guestrin, “XGBoost: A scalable tree boosting system,” in *Proc. ACM SIGKDD*, 2016, pp. 785–794.
- [18] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg *et al.*, “Scikit-learn: Machine learning in Python,” *Journal of Machine Learning Research*, vol. 12, pp. 2825–2830, 2011.