







SHEET 1 OF 1



| SWITCH FUNCTION | |
|-----------------|----------|
| POS. 1 | POS. 2 |
| | |
| ON | (ON) |
| 2-1, 5-4 | 2-3, 5-6 |
| (ON)=MOMENTARY | |



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF. ONLY
 - ▲ 4. RATING: 0.1A @ 30VDC
 5. TRAVEL: 2.50±0.38mm
 6. OPERATING FORCE: 220±50gf
 7. ELECTRICAL LIFE: 10,000 CYCLES
 8. ▲ DENOTES CRITICAL PARAMETER
 9. 2002/95/EC (ROHS) COMPLIANT

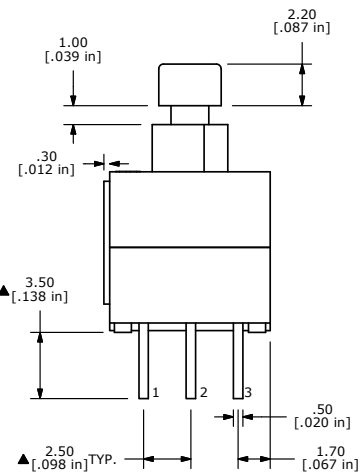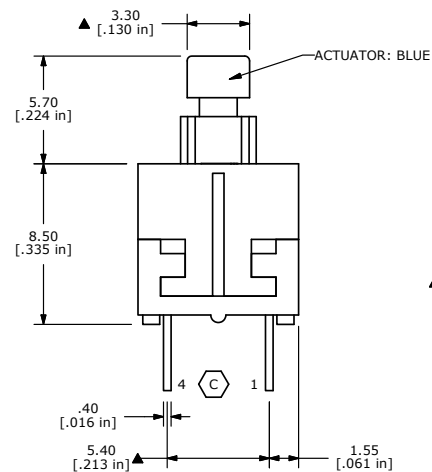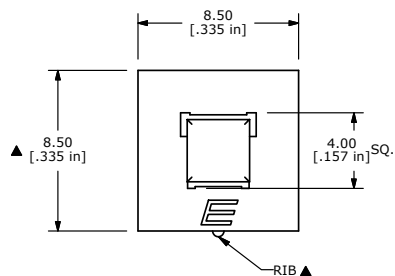

| C | 19719 | CHANGED CIRCUIT DIAGRAM & TERM. #'S | 2/25/11 | BGL | TITLE TL2202OAYA | | | | |
|-----|--------|-------------------------------------|---------|-----|------------------|-----------|----|---------|-----|
| B | 17734 | CHANGED NOTE# 6 | 10/3/07 | BF | | | | | |
| REV | PCR NO | DESCRIPTION | DATE | BY | SCALE | DATE | DR | DWG | REV |
| | | | | | 2:1 | 10/3/2007 | BF | P010376 | C |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[TL2202OAYA](#)