

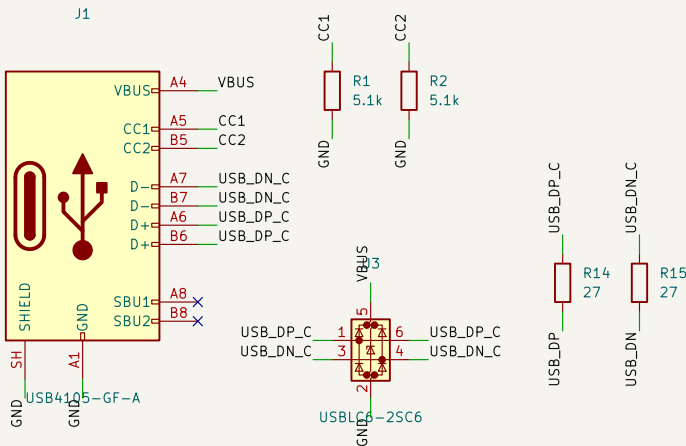
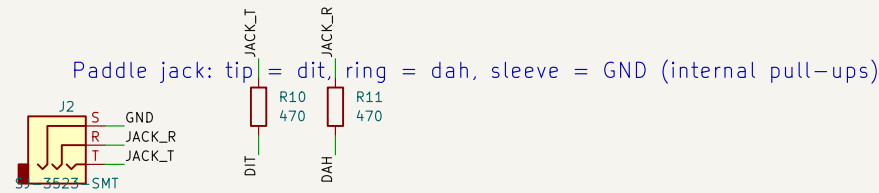


USB-C (USB 2.0 device, 5 V sink)

nRF52840 module, high-voltage mode (Raytac spec 8.1, REG0 DC/DC):
VDDH from VSYS, VDD is the internal 3.3 V output via L1
UICR.REGOUT0 must be set to 3.3 V when the bootloader is flashed

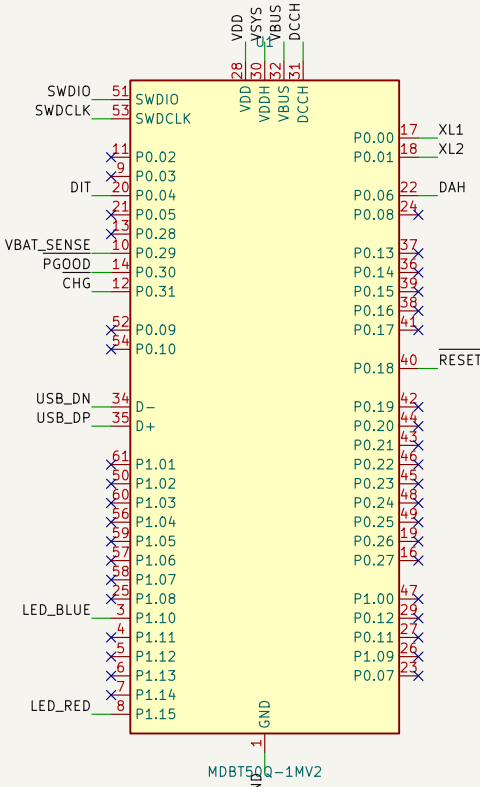

Charger and power path: BQ24074 (OUT = VSYS, 4.4 V on USB, powers the module's VDDH)
175 mA charge, 500 mA input limit (EN2 = 1, EN1 = 0), ITERM and TMR open for the defaults

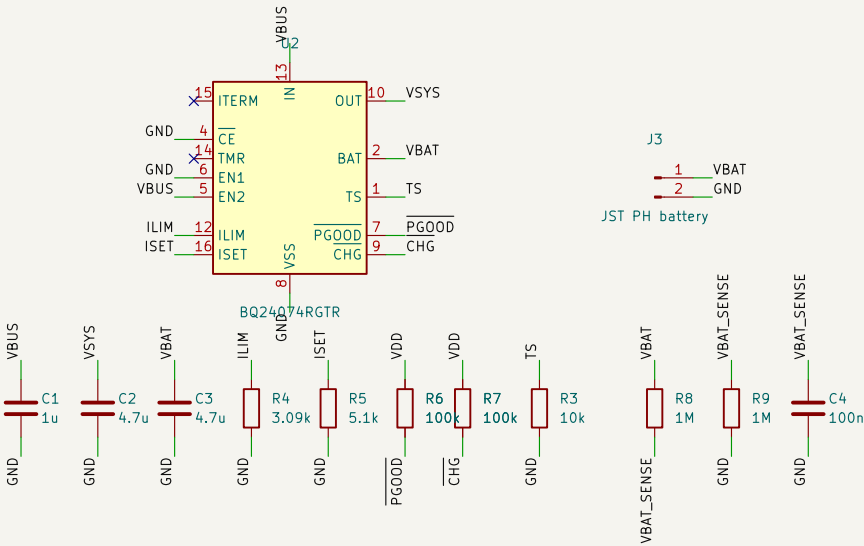

Status LEDs (Feather nRF52840 pins), reset button, SWD for the bootloader

