



INTERFACE	
CN1	
1	DATA
2	RW
3	BACKLIGHT
4	CS
5	VSS
6	FUNCT2
7	VDD(5V)
8	FUNCTION
9	ON.P
10	SW2

CN2	
1	VSS
2	FUNCT2
3	VDD(5V)
4	FUNCTION
5	ON.P
6	SW2

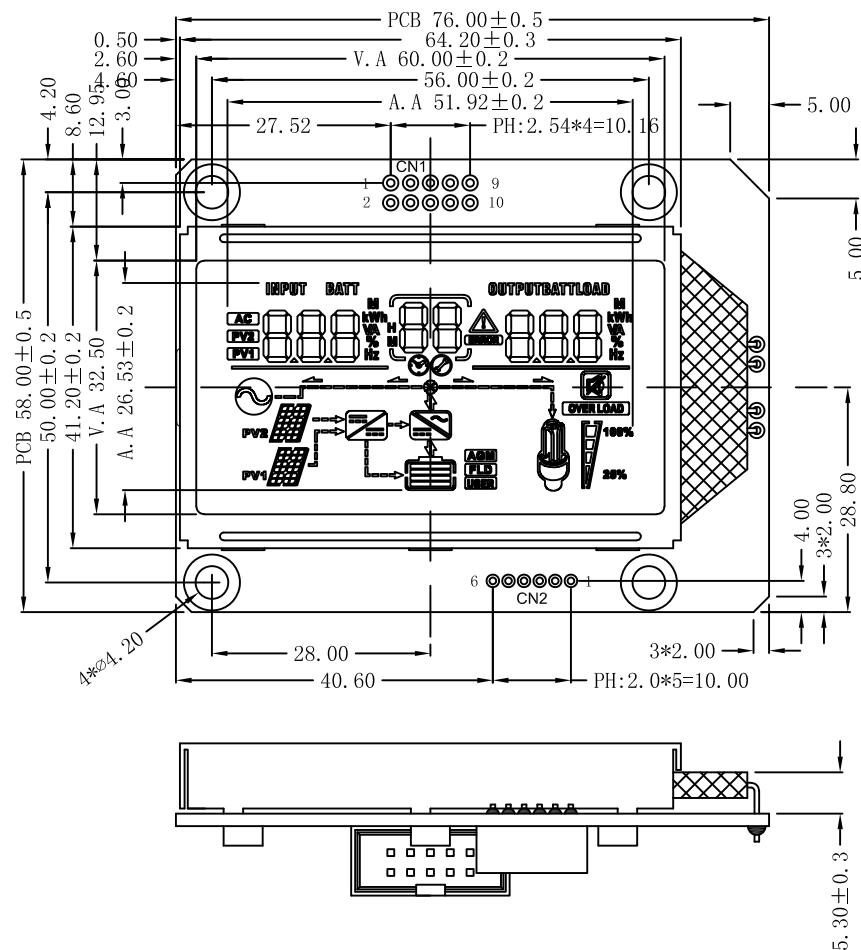

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2021. 04. 27
01	改图形	2021. 05. 13

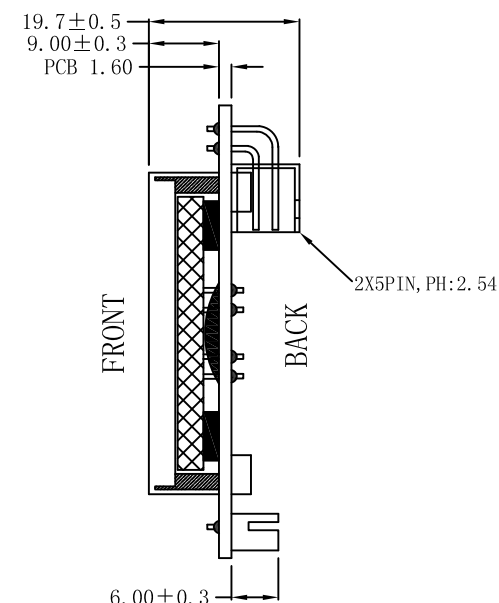

SPECIFICATION:

- 1). HTN/POSITIVE/TRANSMISSIVE
- 2). DUTY:1/4. BIAS:1/3. VOP=4.2V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -0~50℃
STORAGE TEMPERATURE: -10~60℃
- 6). BACKLIGHT: GREEN I=30MA
- 7). DRIVE IC: HT1621

Shen Zhen Genyu Optical Co.,Ltd

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 Of 1
DESIGN BY:	WZQ	2021.04.27		GY88128-648		DATE:	2021.05.13
CHECKED BY:							
CUSTOM NO:				DO NOT SCALE THIS DRAWING.	PROJECTION		

PIN	C3	C2	C1	C0	S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	S13	S14	S15
COM0				COM0	S2	S5	1F	1A	2F	2A	3F	3A	S9	S13	4F	4A	5F	5A	S17	S19
COM1			COM1		S3	S6	1G	1B	2G	2B	3G	3B	S10	S14	4G	4B	5G	5B	S18	S20
COM2		COM2			S4	S7	1E	1C	2E	2C	3E	3C	S11		4E	4C	5E	5C	S46	S21
COM3	COM3				S37	S8	1D	DOT1	2D	DOT2	3D	H _Z 1	S12	S16	4D		5D	L1	S47	S22

PIN	S16	S17	S18	S19	S20	S21	S22	S23	S24	S25	S26	S27	S28	S29	S30	S31	C0	C1	C2	C3
COM0	6F	6A	7F	7A	8F	8A	S23	S27	S30	K1	USER	S48	S38	K5	PVL2	PV2	COM0			
COM1	6G	6B	7G	7B	8G	8B	S24	S28	S31	K2	FLD	S49	S39	K6	PVL1	PV1		COM1		
COM2	6E	6C	7E	7C	8E	8C	S25	S29	S32	K3	AGM	S50	PVT1	K7	S52	S43			COM2	
COM3	6D	DOT4	7D	DOT5	8D	H _Z 2	S26	L2	S33	K4	S36	S51	S40	K8	S53	S45				COM3

