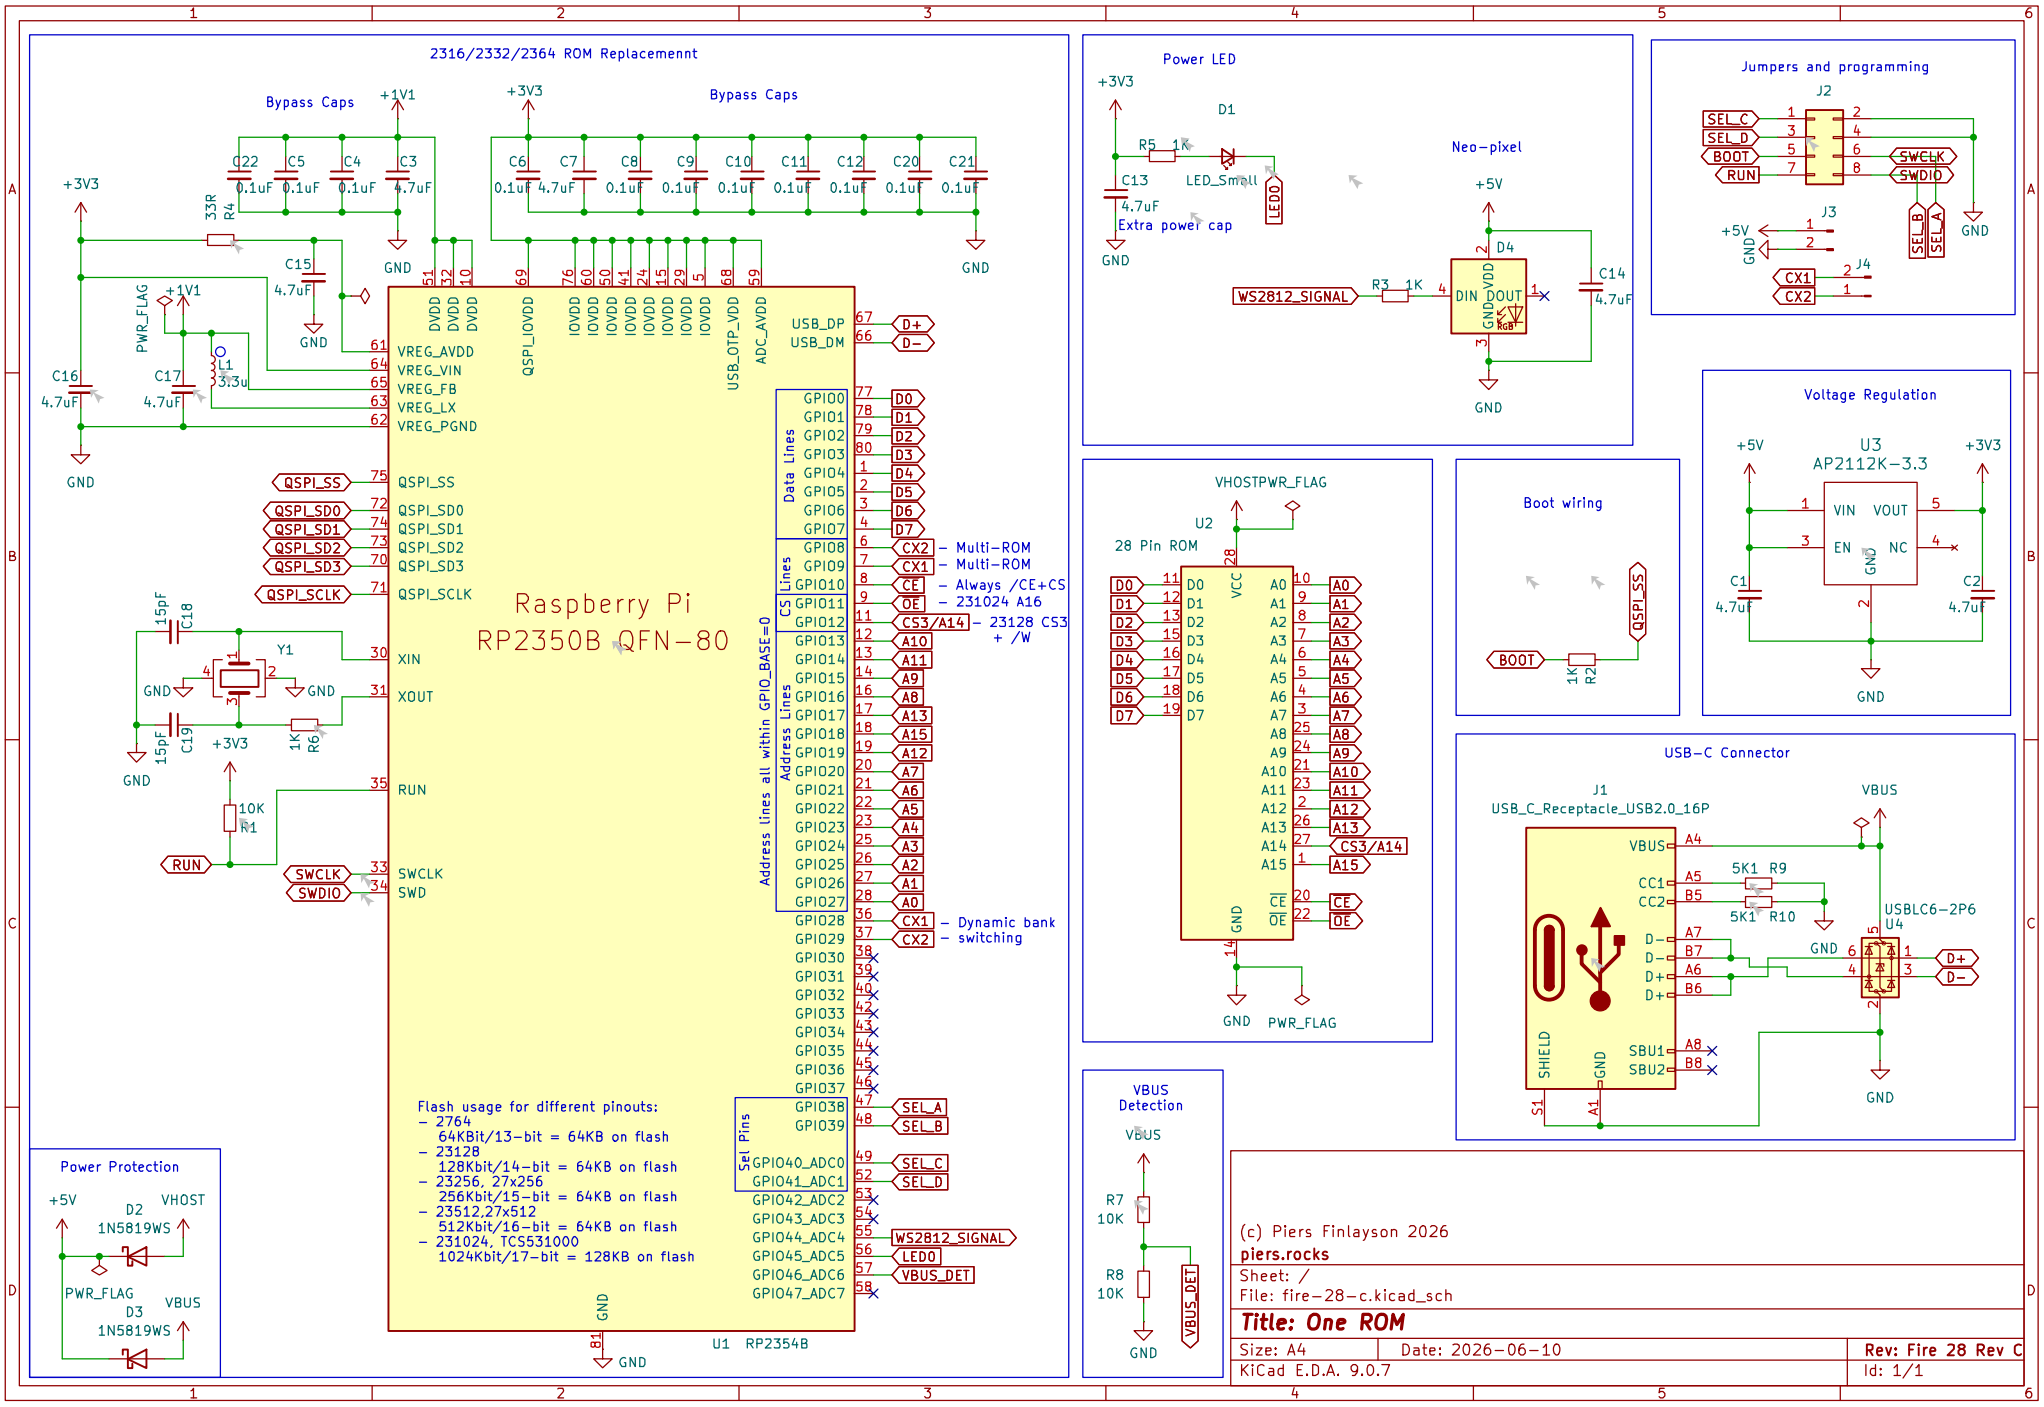
2316/2332/2364 ROM Replacemennt
Bypass Caps
Bypass Caps
Raspberry Pi
RP2350B QFN-80
U1 RP2354B
Flash usage for different pinouts:
– 2764
64Kbit/13-bit = 64KB on flash
– 23128
128Kbit/14-bit = 64KB on flash
– 23256, 27x256
256Kbit/15-bit = 64KB on flash
– 23512,27x512
512Kbit/16-bit = 64KB on flash
– 231024, TCS531000
1024Kbit/17-bit = 128KB on flash
Power LED
Neo-pixel
Jumpers and programming
Voltage Regulation
AP2112K-3.3
VHOSTPWR_FLAG
28 Pin ROM
Boot wiring
USB-C Connector
USB_C_Receptacle_USB2.0_16P
USBLC6-2P6
VBUS Detection
Power Protection
1N5819WS
Extra power cap
(c) Piers Finlayson 2026
piers.rocks
Sheet: /
File: fire-28-c.kicad_sch
Title: One ROM
Size: A4
Date: 2026-06-10
KiCad E.D.A. 9.0.7
Rev: Fire 28 Rev C
Id: 1/1