


NAMA : TYA FRANSISKA

NIM : 5190711063

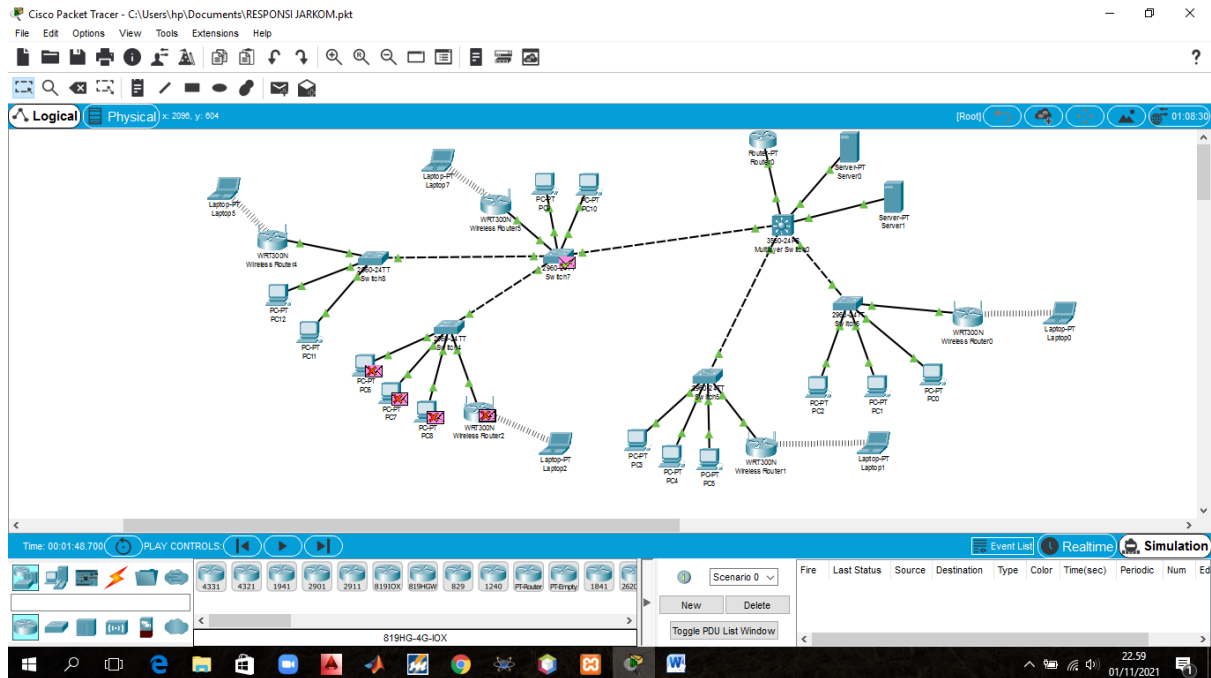

```
Physical Config CLI Attributes
IOS Command Line Interface
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 26.26.26.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#int fa1/0
Router(config-if)#ip address 8.8.8.8 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

Router(config-if)#exit
Router(config)#

Ctrl+F5 to exit CLI focus
```

Physical Config CLI Attributes

IOS Command Line Interface

```
Processor Board ID FT0123 (0123)
VR2000 processor: part number 0, mask 01
Brigging software.
X.25 software, Version 3.0.0.
4 FastEthernet/IEEE 802.3 interface(s)
2 low-speed serial(sync/async) network interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CTRL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 26.26.26.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
ALINK-1-CHANGED: Interface FastEthernet0/0, changed state to up
ALINKPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#int fa1/0
Router(config-if)#ip address 8.8.8.8 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
ALINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

Router(config-if)#exit
Router(config)#
```

Ctrl-F to exit CLI focus

Copy Paste