

VIEW ON THE BOTTOM FACE (A-A VERTICAL)

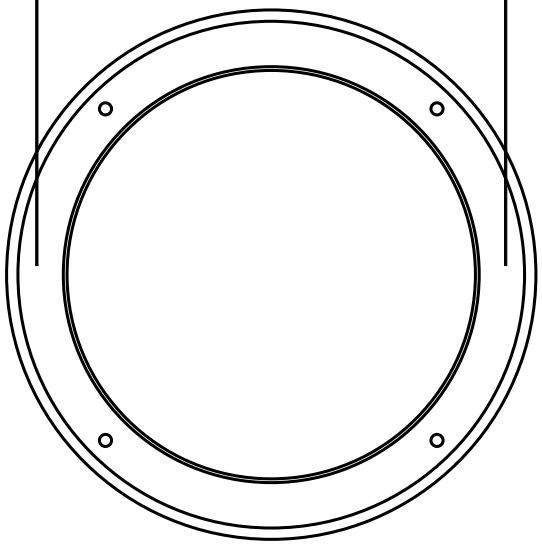

SECTION A-A

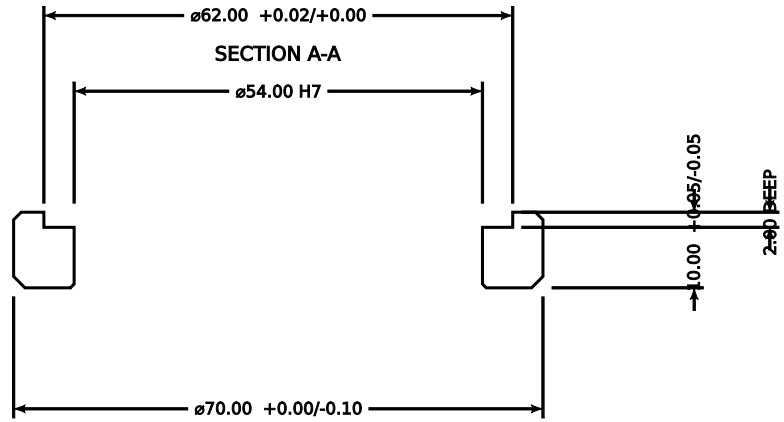

MATERIAL: 316L stainless. STOCK: Ø74 bar or ring forging. turn.
GENERAL TOLERANCE ISO 2768-m; UNMARKED EDGES DEBURRED.
DIMENSIONS IN MM FROM THE BOTTOM FACE AND THE AXIS.
DO NOT SCALE THE DRAWING; TAKE DIMENSIONS FROM THE FIGURES.

CHAMFERS: 1.0 x 45 TOP OUTER, 1.5 x 45 BOTTOM OUTER, 0.5 x 45 BOTTOM INNER.
RECESS ø62.00 +0.02/-0.00 x 2.00 +0.02/-0.00 DEEP IN THE TOP FACE,
COAXIAL TO THE ø54 H7 BORE WITHIN ø0.02: IT CENTRES THE MAGNET TRACK.
4x ø1.60 x 3.0 DEEP AT 45/135/225/315 IN THE BOTTOM FACE; TAP M2 TO TRIM.
DEBURR ALL EDGES. PROCESS ORDER AND BALANCE: MECHANICAL 5 AND 14.

TURNING ONLY -- no milled features. Straight knurl on the OD, 1.5 to
8.5 from the bottom face (flick grip).
The recess seats the printed magnet shim, and its floor is the magnet
seat: face it flat and square to 0.02 and hold the depth +0.02/-0.00,
because that is what sets the 1.0 mm detent and sensor gap.
The top face OUTSIDE the recess is the encoder datum and the damping-pad
land: flat and square to 0.02, runout 0.05 TIR.
316L required. 304 can become weakly magnetic after cold working and the
track runs 1.0 mm under a Hall sensor: check the blank with an N52 magnet.

DESIGNED BY: dial-me-spinner / hardware-as-code	rotor ring	
DATE: 2026-10-23	316L stainless rev A 1:1	
SCALE: 1:1.0	DRAWING NUMBER: DMS-07	SHEET: 1