


SECTION A-A 3:1

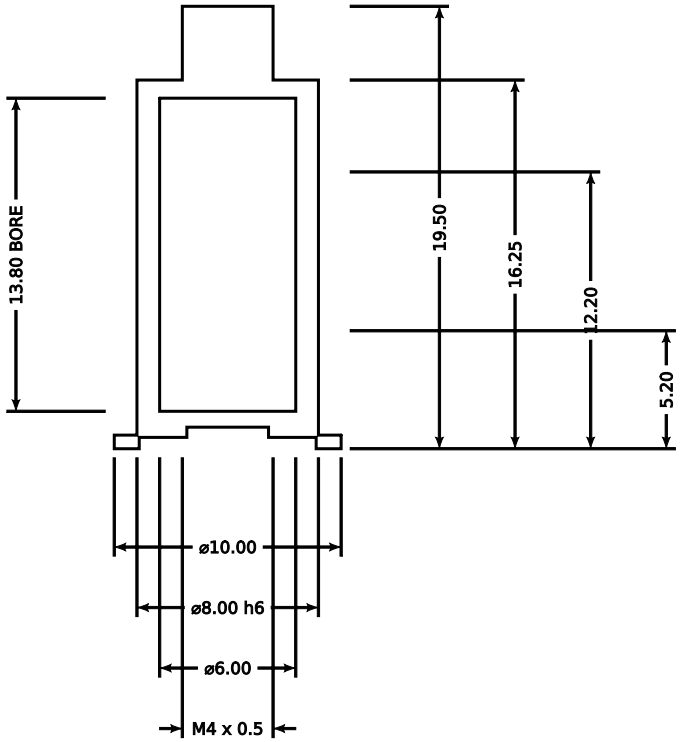

VIEW ON THE TOP FACE 3:1



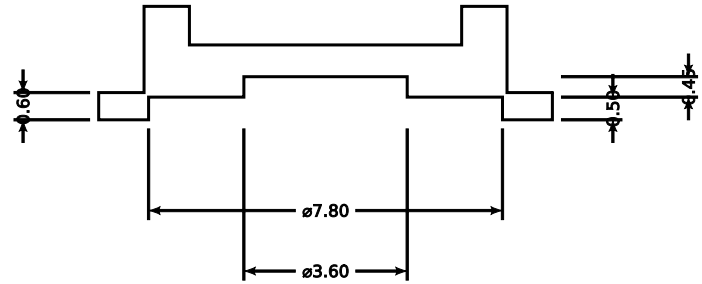

DETAIL B (RELIEF, PAD POCKET, FLANGE) 6:1

MATERIAL: 316L stainless. STOCK: Ø12 bar. turn / mill.
GENERAL TOLERANCE ISO 2768-m; UNMARKED EDGES DEBURRED.
DIMENSIONS IN MM FROM THE BOTTOM FACE AND THE AXIS.
DO NOT SCALE THE DRAWING; TAKE DIMENSIONS FROM THE FIGURES.

SLOTS 5.0 WIDE, BOTH BREAKING INTO THE BORE: 1.65-3.55 AT 120 AND 13.00-15.45 AT 270.
BORE ø6.00 +0.05/-0.00; SPIGOT M4 x 0.5 ON ø4.00.

Ø8 journal h6 over the bearing seat, 5.2 to 12.2 from the bottom face.
Spigot thread M4 x 0.5 (fine), full length above the shoulder.
Bore Ø6.00 from 1.65 to 15.45; 0.8 mm end wall under the spigot.
One flat plane 3.70 off the axis over 0.0-5.2 and 12.2-16.25: the two
flats are COPLANAR, which is what keys the plate, spacer and hub to each
other. 0.3 deep on the Ø8 journal, 1.3 deep where it crosses the flange.
Slots 5.0 wide break through into the bore; deburr inside the bore.
316L required, non-magnetic: check the blank with an N52 magnet.

DESIGNED BY: dial-me-spinner / hardware-as-code	spindle	
DATE: 2026-10-20	316L stainless rev A 3:1	
SCALE: 1:0.333	DRAWING NUMBER: DMS-08	SHEET: 1