

SECTION A-A 3:1

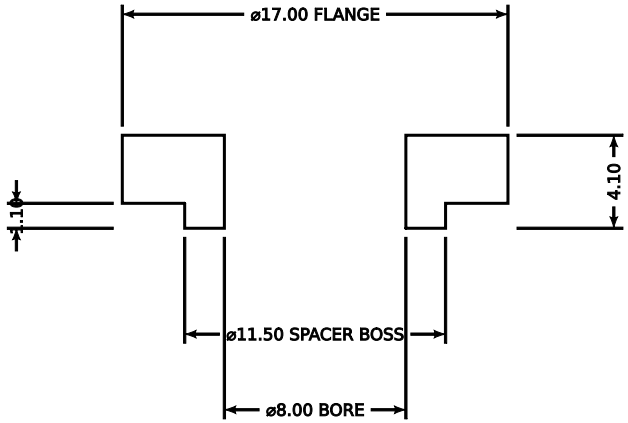

VIEW ON THE FLANGE TOP FACE 3:1

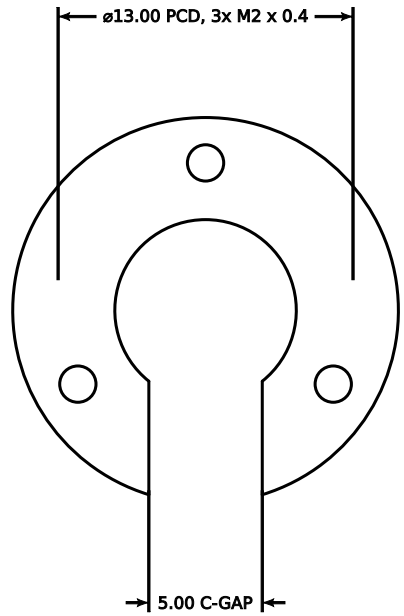

MATERIAL: C360 brass. STOCK: Ø18 bar. turn / mill.
GENERAL TOLERANCE ISO 2768-m; UNMARKED EDGES DEBURRED.
DIMENSIONS IN MM FROM THE BOTTOM FACE AND THE AXIS.
DO NOT SCALE THE DRAWING; TAKE DIMENSIONS FROM THE FIGURES.

TAPPED HOLES AT 90/210/330, C-GAP AT 270, 2.6 DEEP (ø1.60 TAP DRILL).
BORE ø8.00 +0.05/-0.00, SLIP FIT ON THE SPINDLE.

3x M2 x 0.4 tapped 2.6 deep from the flange top face. Tapped, not heat-set: the 0.4 mm wall around an insert would split.
C-gap 5.0 wide through the full height, for the harness.
The flange top face is the main-board seat: flat within 0.05.
OPEN: the bore is drawn round. Mechanical 13 calls for a D-bore on the spindle flat (3.70 off axis) to key it; the model has not got it yet.

DESIGNED BY: dial-me-spinner / hardware-as-code	spindle hub	
DATE: 2026-10-20	C360 brass rev A 3:1	
SCALE: 1:0.333	DRAWING NUMBER: DMS-09	SHEET: 1