

VIEW ON THE TOP FACE (A-A VERTICAL)

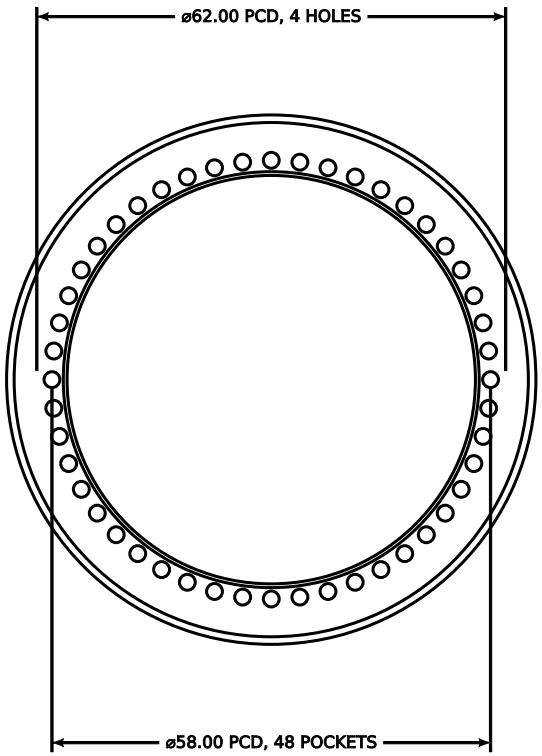

SECTION A-A

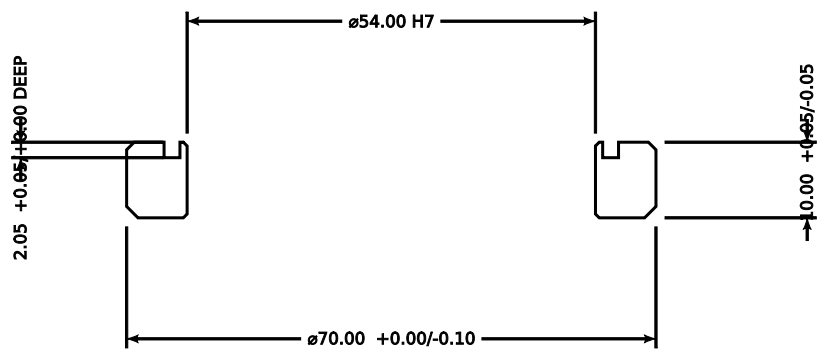

MATERIAL: 316L stainless. STOCK: Ø74 bar or ring forging. turn / mill.
GENERAL TOLERANCE ISO 2768-m; UNMARKED EDGES DEBURRED.
DIMENSIONS IN MM FROM THE BOTTOM FACE AND THE AXIS.
DO NOT SCALE THE DRAWING; TAKE DIMENSIONS FROM THE FIGURES.

CHAMFERS: 1.0 x 45 TOP OUTER, 1.5 x 45 BOTTOM OUTER, 0.5 x 45 BOTH INNER.
48x ø2.10 POCKETS EQUALLY SPACED (7.5 APART) ON THE ø58.00 PCD.
4x ø1.60 x 3.0 DEEP AT 45/135/225/315.

Straight knurl on the OD, 1.5 to 8.5 from the bottom face (flick grip).
48 magnet pockets Ø2.10 +0.05/-0.00, 2.05 deep from the TOP face: that face is the magnet track, so pocket depth sets the 1.0 mm sensor gap.
4x Ø1.60 balance holes 3.0 deep from the bottom face; tap M2 for trim.
316L required. 304 can become weakly magnetic after cold working and the track runs 1.0 mm under a Hall sensor: check the blank with an N52 magnet.
Deburr all edges. Process order and balance budget: mechanical 5 and 14.

DESIGNED BY: dial-me-spinner / hardware-as-code	rotor ring	
DATE: 2026-10-20	316L stainless rev A 1:1	
SCALE: 1:1.0	DRAWING NUMBER: DMS-07	SHEET: 1