

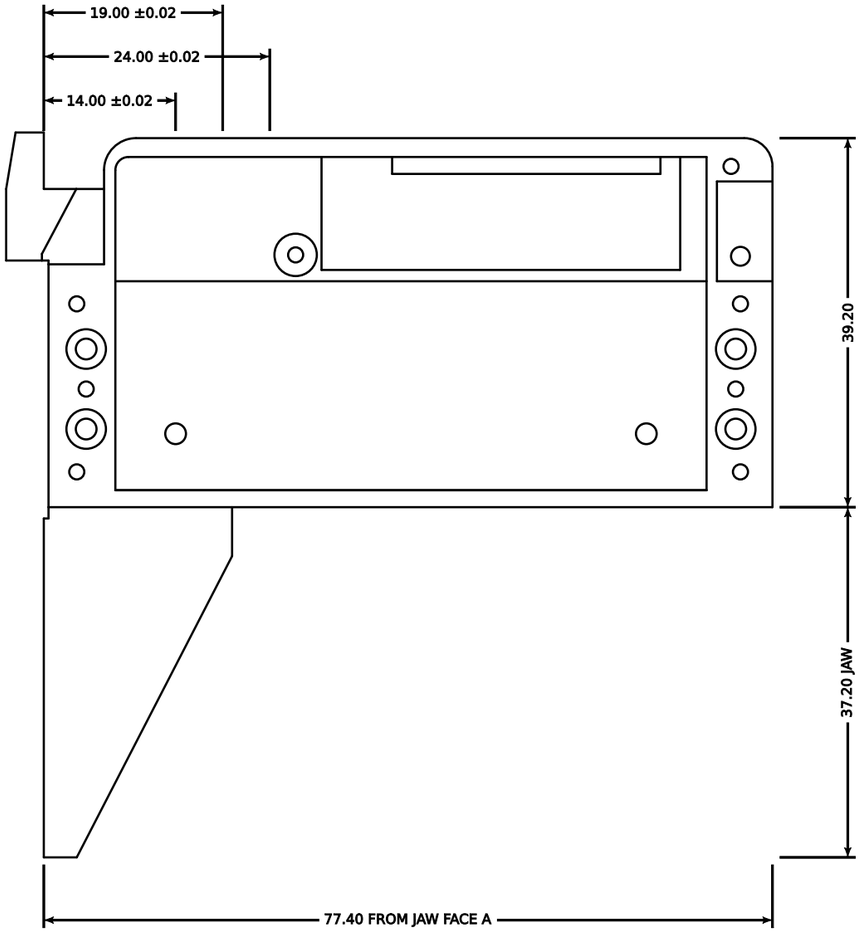



VIEW FROM THE FRONT (DISPLAY SIDE)  1.5:1

SECTION A-A  (u = 39)  2:1

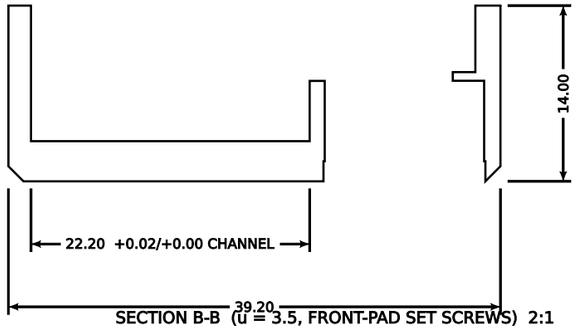


SECTION B-B  (u = 3.5, FRONT-PAD SET SCREWS)  2:1

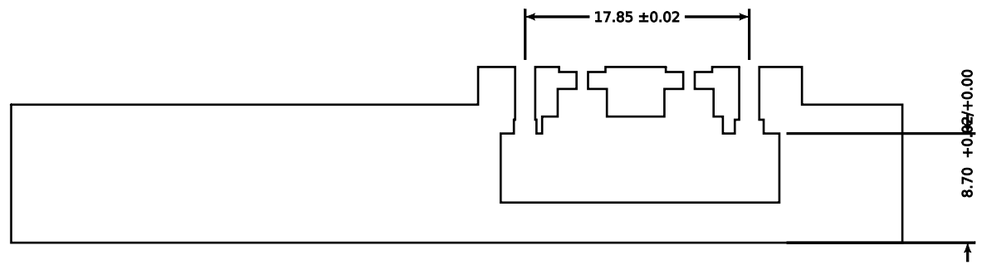


GENERAL TOLERANCE ISO 2768-mK UNLESS STATED; DIMENSIONS IN MM.
DO NOT SCALE THE DRAWING. BREAK SHARP EDGES 0.2 x 45 EXCEPT WHERE NOTED SHARP.
STEP FILE IS THE MASTER FOR UNDIMENSIONED GEOMETRY.

MATERIAL 6061-T6, STRESS-RELIEVED PLATE. CLEAR ANODISE 10 um AFTER MACHINING;
MASK THE CHANNEL FACES AND THE JAW MEASURING FACE.
DATUM A: MOVING-JAW MEASURING FACE (u = 0).  DATUM B: CHANNEL LOWER FACE (REFERENCE-STRIP SEAT).
DATUM C: CHANNEL FRONT FACE (TOWER UNDERSIDE).
JAW MEASURING FACE: FLAT 0.005, PERPENDICULAR TO B WITHIN 0.01 — AFTER LAPPING
WITH THE FIXED JAW CLOSED ON IT (PARALLEL 0.01 BETWEEN THE TWO JAWS), SEE MECHANICAL 9.
GIB AND LOCK BORE POSITIONS (u 14.00 / 24.00 / 19.00) ±0.02 FROM A, AXIS z -2.50;
FRONT-PAD SET-SCREW HOLES ±0.02 FROM B. ALL M2 HOLES TAPPED M2x0.4 6H, 4 DEEP;
GIB AND LOCK HOLES M3x0.5 6H, 5 DEEP FROM THE TOP FACE (NYLON SCREWS). CHANNEL (TUNNEL) 22.20 +0.02/0 x 5.50 +0.02/0, FLOOR Ra 0.8.
TAB CLAMPS: 4x POCKET ⌀4.4 TO z 3.65, M2 THRU, FACE THE CLAMP FACES COPLANAR 0.02 (NO EPOXY BEDDING IN REV B).
RF (SPEC D4): NO METAL WITHIN 5 MM OF THE ANTENNA (u 3.2..28.6, y 24.5..TOP FACE): MACHINE THAT REGION
OPEN AND BOND IN A PRINTED / POM INSERT.
OUTSIDE: R3.4 / R3 AT THE TOP CORNERS IN PLAN; 1.2 x 45 ON THE BACK-FACE EDGES EXCEPT AT THE JAW ROOTS AND THE STEP.
OPTIONAL: POCKET 2.0 DEEP IN THE JAW FACE FOR A HARDENED, GROUND JAW INSERT
(1.2379 / D2 60 HRC OR CARBIDE, 2.0 x 6 x 34), BONDED + 2 PINS, GROUND IN PLACE.

| | | |
|---|---|---|
| DESIGNED BY:<br>PrettyCool Caliper / hardware-as-code | slider body | |
| DATE:<br>2026-11-09 | 6061-T6 clear anodise  rev B  plan 1.5:1, sections 2:1 | |
| SCALE:<br>1:1.0 | DRAWING NUMBER:<br>PCC-M-01 | SHEET:<br>1 |