

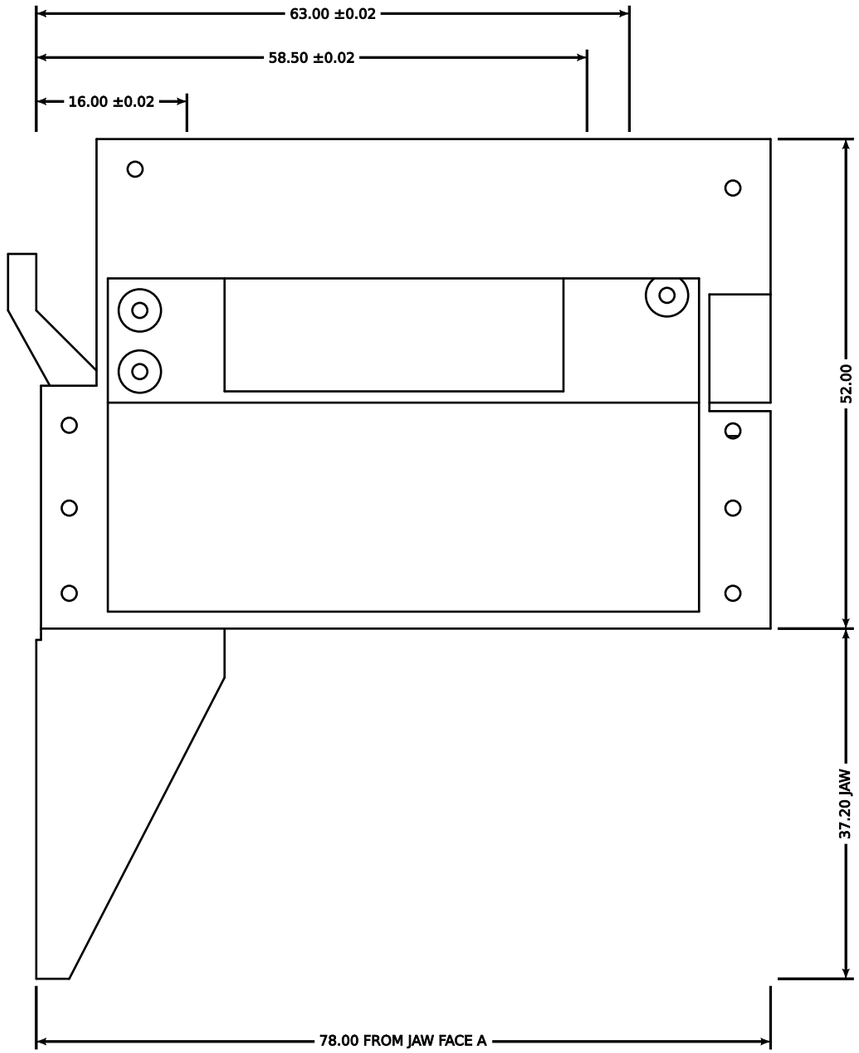



VIEW FROM THE FRONT (DISPLAY SIDE)  1.5:1

SECTION A-A  (u = 39)  2:1

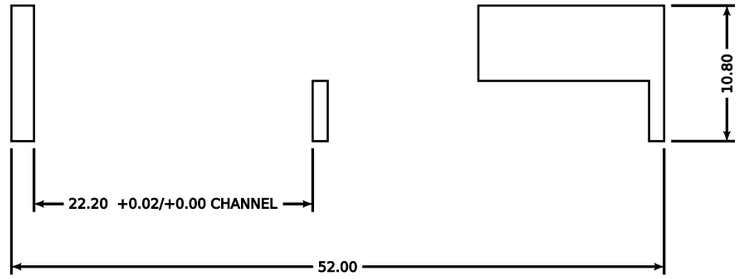


SECTION B-B  (u = 3.5, FRONT-PAD SET SCREWS)  2:1

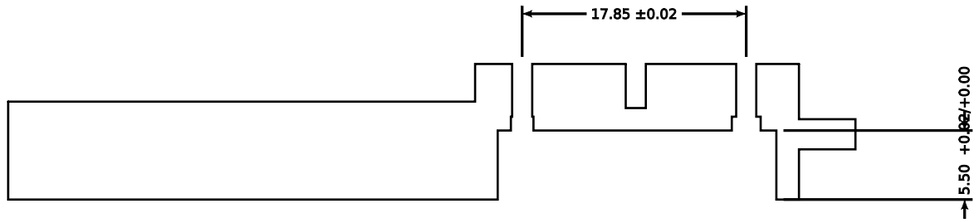


GENERAL TOLERANCE ISO 2768-mK UNLESS STATED; DIMENSIONS IN MM.
DO NOT SCALE THE DRAWING. BREAK SHARP EDGES 0.2 x 45 EXCEPT WHERE NOTED SHARP.
STEP FILE IS THE MASTER FOR UNDIMENSIONED GEOMETRY.

MATERIAL 6061-T6, STRESS-RELIEVED PLATE. CLEAR ANODISE 10 um AFTER MACHINING;
MASK THE CHANNEL FACES AND THE JAW MEASURING FACE.
DATUM A: MOVING-JAW MEASURING FACE (u = 0).  DATUM B: CHANNEL LOWER FACE (REFERENCE-STRIP SEAT).
DATUM C: CHANNEL FRONT FACE (TOWER UNDERSIDE).
JAW MEASURING FACE: FLAT 0.005, PERPENDICULAR TO B WITHIN 0.01 -- AFTER LAPPING
WITH THE FIXED JAW CLOSED ON IT (PARALLEL 0.01 BETWEEN THE TWO JAWS), SEE MECHANICAL 9.
GIB AND LOCK BORE POSITIONS (u 16.00 / 58.50 / 63.00) ±0.02 FROM A;
FRONT-PAD SET-SCREW HOLES ±0.02 FROM B. ALL M2 HOLES TAPPED M2x0.4 6H, 4 DEEP;
LOCK HOLE M3x0.5 6H. CHANNEL 22.20 +0.02/0 x 5.50 +0.02/0, FLOOR Ra 0.8.
OPTIONAL: POCKET 2.0 DEEP IN THE JAW FACE FOR A HARDENED, GROUND JAW INSERT
(1.2379 / D2 60 HRC OR CARBIDE, 2.0 x 6 x 34), BONDED + 2 PINS, GROUND IN PLACE.

| | | |
|---|---|---|
| DESIGNED BY:<br>PrettyCool Caliper / hardware-as-code | slider body | |
| DATE:<br>2026-11-07 | 6061-T6 clear anodise  rev B  plan 1.5:1, sections 2:1 | |
| SCALE:<br>1:1.0 | DRAWING NUMBER:<br>PCC-M-01 | SHEET:<br>1 |