
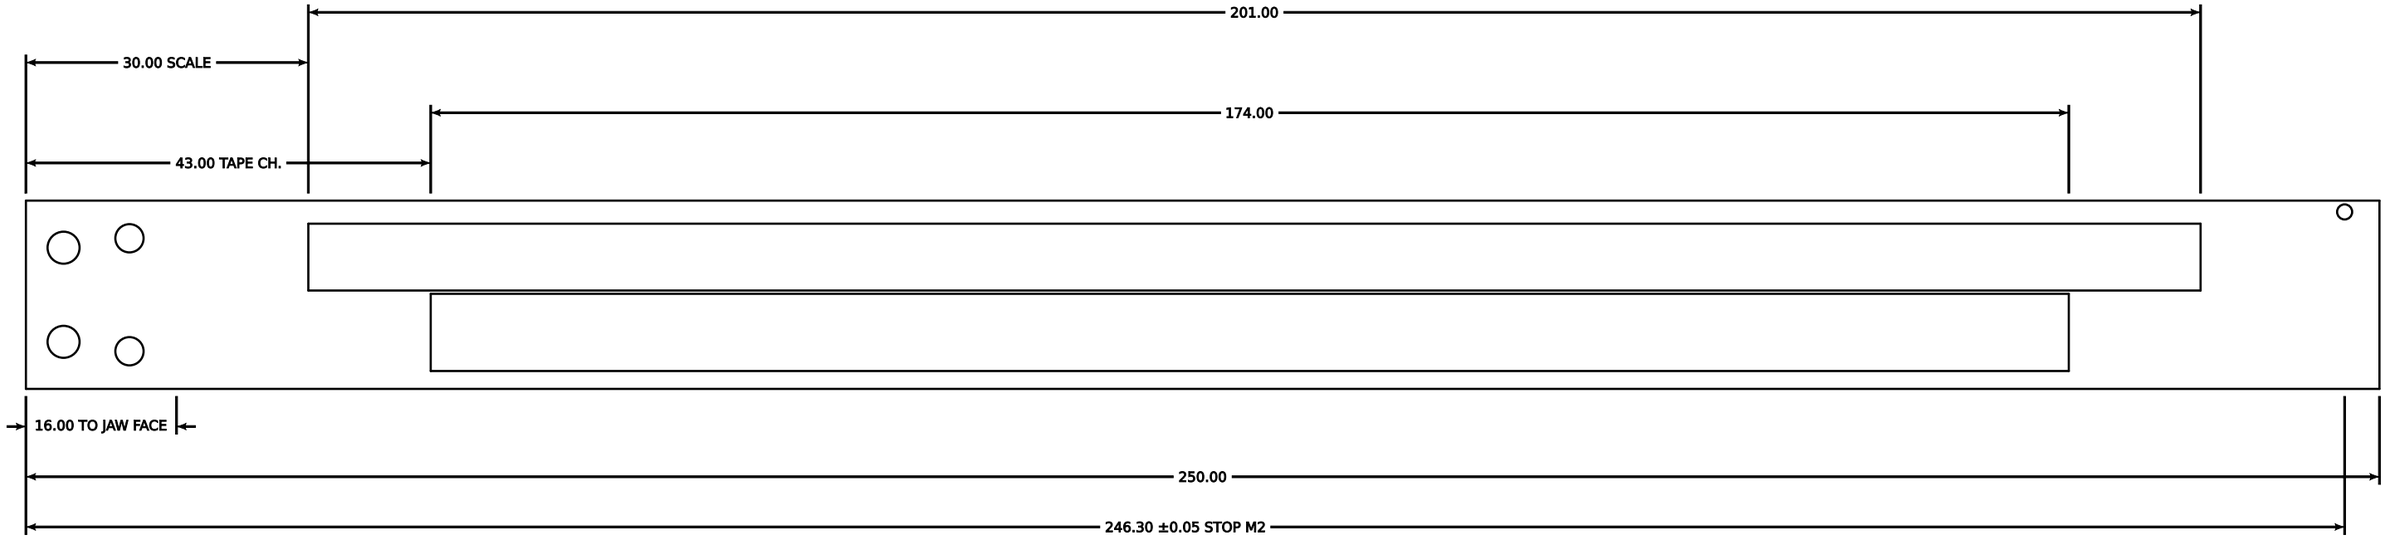


VIEW ON THE FRONT FACE (DATUM D); LOWER EDGE y = 0 IS REFERENCE EDGE E 1.5:1

SECTION C-C (x = 100) 6:1

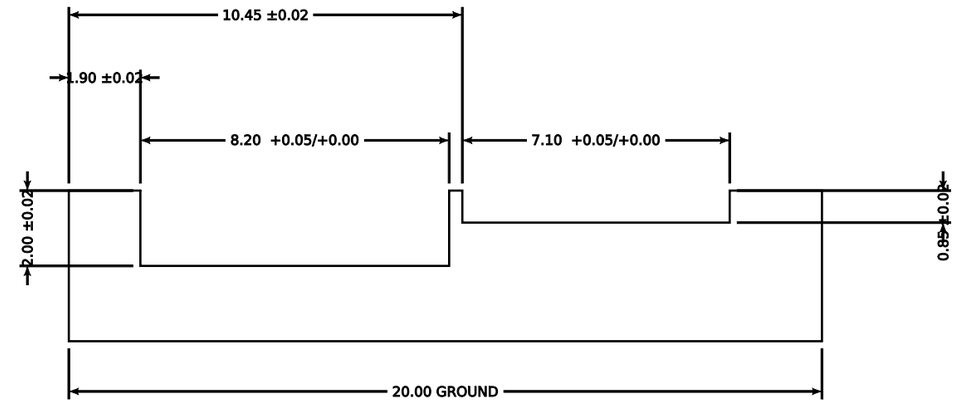

GENERAL TOLERANCE ISO 2768-mK UNLESS STATED; DIMENSIONS IN MM.
DO NOT SCALE THE DRAWING. BREAK SHARP EDGES 0.2 x 45 EXCEPT WHERE NOTED SHARP.
STEP FILE IS THE MASTER FOR UNDIMENSIONED GEOMETRY.

STOCK: GROUND FLAT 20 x 4 (h9/h11), 250 LONG. O1 (1.2510) ANNEALED OR 1.4301.
OPERATIONS: 1 ROUGH BOTH POCKETS 0.2 UNDER, DRILL ALL HOLES 0.2 UNDER;
2 O1: HARDEN + TEMPER 58-60 HRC. 1.4301: STRESS-RELIEVE ONLY;
3 SURFACE-GRIND FRONT FACE D, GRIND EDGE E (ALL LATER DEPTHS ARE FROM THIS D);
4 FINISH POCKETS FROM D, 2 MM FLAT END MILL, END RADIUS 1.0 (O1 HARD: CARBIDE HARD-MILL OR EDM);
5 FINISH HOLES (1.4301: REAM; O1 HARD: JIG-GRIND OR WIRE-EDM TO H7).
EDGE E (y = 0): STRAIGHT 0.01 OVER ANY 150, 0.015 OVER THE LENGTH. FACE D FLAT 0.01 / 150.
POCKET FLOORS PARALLEL TO D WITHIN 0.01; Ra 0.8.
JAW-JOINT HOLES: 2x ⌀3.4 THRU AT x -12 (y 5, 15); 2x ⌀3 H7 THRU AT x -5 (y 4, 16), ±0.02.
STOP: M2x0.4 6H THRU AT y 18.8 (TAP BEFORE HARDENING); M2x6 ISO 4762 + LOCTITE 222,
HEAD 2 PROUD OF D. REMOVE IT TO TAKE THE SLIDER OFF THE BEAM.
DEBURR POCKET EDGES WITHOUT ROUNDING FACE D (STONE FLAT).

DESIGNED BY: PrettyCool Caliper / hardware-as-code	beam: pocket operations	
DATE: 2026-11-10	O1 or 1.4301 ground flat 20x4 rev B plan 1.5:1, section 6:1	
SCALE: 1:1.0	DRAWING NUMBER: PCC-M-02	SHEET: 1