

3D Computer Vision: HW2

Structure from Motion

1 Submission

- Assignment due: May 10 (11:59pm)
- Skeletal code and data can be downloaded from:
https://drive.google.com/drive/folders/11WYrR_E0eT50P9qtB2FNav10PHPh0veg?usp=sharing
- For submission, submit your code, and short summary write-up including output images (use Meshlab to capture image)
- Use Python 3.7
- The function that does not comply with its specification will NOT BE GRADED.
- You are not allowed to use computer vision related package functions unless explicitly mentioned here. Please contact TA via email (ininin0516@snu.ac.kr) or Q&A board in ETL if you are not sure about the list of allowed functions.
- You can use the following script to install the dependencies:

```
pip install -r requirements.txt
```

If there's an error or issues regarding package installation, please contact TA.

- The visualization code for the final result is provided. If you finish and run the pipeline, you can find `output/cameras_i.ply` and `output/points_i.ply`, which are the camera coordinate frames and reconstructed points, respectively. You can use MeshLab (<https://www.meshlab.net>) to open them.
- Please place all codes as well as a short summary write-up with resulting visualization(in pdf format; if the write-up exceeds two-page, score can be deducted) into a folder named `{STUDENT_NUMBER}_{NAME}`, compress it into `{STUDENT_NUMBER}_{NAME}.zip` file, and submit it.
(ex. 202500000_GILDONGHONG.zip)
- Please write down your comment on the implementation meticulously. If there is no comment, the score can be highly deducted.
- We discourage you using recent generative AI models (like chatGPT or Bard) here. Please write the codes by yourself and do not copy&paste generative model's output.
- You will complete the following functions (functions in blue are given):

3D Computer Vision: HW2

Structure from Motion

```
– hw2.py
– feature.py
    * MatchSIFT
    * EstimateE
    * EstimateE_RANSAC
    * BuildFeatureTrack
– camera_pose.py
    * GetCameraPoseFromE
    * Triangulation
    * EvaluateCheirality
    * EstimateCameraPose
– pnp.py
    * PnP
    * PnP_RANSAC
    * ComputePoseJacobian
    * PnP_nl
– reconstruction.py
    * FindMissingReconstruction
    * MeasureReprojection
    * UpdatePosePoint
    * RunBundleAdjustment
    * Triangulation_nl
    * ComputePointJacobian
    * SetupBundleAdjustment
– utils.py
    * Quaternion2Rotation
    * Rotation2Quaternion
```

- This homework has been borrowed from 3D Computer Vision Class of University of Minnesota. Special thanks to Professor Hyun Soo Park for allowing the use of this homework.

3D Computer Vision: HW2

Structure from Motion

2 Overview



Figure 1: You will implement structure from motion to reconstruct the camera pose and 3D points.

In this assignment, you will use a set of images to reconstruct the 3D scene and camera poses by implementing structure from motion algorithm. This will include feature matching, camera pose estimation using the fundamental matrix, camera registration, triangulation, and bundle adjustment. Nonlinear optimization is always followed by the initial estimate by linear least squares solution. The pseudo-code can be found in Algorithm 1.

Algorithm 1 Structure from Motion

```
1: Build feature track                                     ▷ BuildFeatureTrack
2: Estimate first two camera poses                      ▷ EstimateCameraPose
3: Initialize pose set P
4: for  $i = 2, \dots, N-1$  do
5:   Estimate new camera pose                           ▷ PnP, PnP_nl
6:    $P = P \cup P_i$ 
7:   for  $j < i$  do
8:     Find new points to reconstruct                  ▷ FindMissingReconstruction
9:     Triangulate point                            ▷ Triangulation, Triangulation_nl
10:    Filter out point based on cheirality          ▷ EvaluateCheirality
11:    Update 3D point
12:   end for
13:   Run bundle adjustment                         ▷ RunBundleAdjustment
14: end for
```

3D Computer Vision: HW2

Structure from Motion

3 Building Feature Track



Figure 2: Given a set of images, you will build a tensor **track** that specifies the matches across views.

Given a set of images, $\text{Im} \in \mathbb{R}^{N \times H \times W \times 3}$, you will build a tensor $\text{track} \in \mathbb{R}^{N \times F \times 2}$ that specifies the matches across all views where N is the number of images, and F is the total number of features. Consider the f^{th} feature point (x, y) in the i^{th} image is stored in $\text{track}[i, f, :]$. If the point is matched to a point in the j^{th} image, the correspondence is stored in $\text{track}[j, f, :]$, i.e.,

$$\text{track}[j, f, :] = \begin{cases} \mathbf{x}_j & \text{if } \mathbf{x}_i \leftrightarrow \mathbf{x}_j \\ -1 & \text{otherwise} \end{cases}, \quad (1)$$

where $\mathbf{x}_i \leftrightarrow \mathbf{x}_j$ indicates a point correspondence between two views.

For instance, in Figure 2, \mathbf{x}_1^f is matched to \mathbf{x}_2^f and \mathbf{x}_3^f , and therefore, $\text{track}[1, f, :] = \mathbf{x}_1^f$, $\text{track}[2, f, :] = \mathbf{x}_2^f$, and $\text{track}[3, f, :] = \mathbf{x}_3^f$. On the other hand, \mathbf{x}_2^k is only matched to \mathbf{x}_3^k , and therefore, $\text{track}[1, k, :] = -1$, $\text{track}[2, k, :] = \mathbf{x}_2^k$, and $\text{track}[3, k, :] = \mathbf{x}_3^k$. To build the **track**, you need to aggregate all pairwise matches. The pseudo-code can be found in Algorithm 2

3D Computer Vision: HW2

Structure from Motion

Algorithm 2 BuildFeatureTrack

```
1: for  $i = 0, \dots, N - 1$  do
2:   Extract SIFT descriptor of the  $i^{\text{th}}$  image,  $\text{Im}[i]$ 
3: end for
4: for  $i = 0, \dots, N - 1$  do
5:   Initialize  $\text{track}_i = -1^{N \times F \times 2}$ 
6:   for  $j = i + 1, \dots, N - 1$  do
7:     Match features between the  $i^{\text{th}}$  and  $j^{\text{th}}$  images            $\triangleright \text{MatchSIFT}$ 
8:     Normalize coordinate by multiplying the inverse of intrinsics.
9:     Find inliner matches using essential matrix                   $\triangleright \text{EstimateE\_RANSAC}$ 
10:    Update  $\text{track}_i$  using the inlier matches.
11:   end for
12:   Remove features in  $\text{track}_i$  that have not been matched for  $i + 1, \dots, N$ .
13:    $\text{track} = \text{track} \cup \text{track}_i$ 
14: end for
```



Figure 3: You can visualize epipolar lines for each image to validate the fundamental matrix.

```
def EstimateE(x1, x2):
    ...
    return E
```

Input: $x1 \in \mathbb{R}^{n \times 2}$ and $x2 \in \mathbb{R}^{n \times 2}$ are the set of correspondences.

Output: $E \in \mathbb{R}^{3 \times 3}$ is an essential matrix.

Description: The essential matrix must be a rank 2 matrix, and its singular values must be $(1, 1, 0)$. Use SVD to set the singular values.

```
def EstimateE_RANSAC(x1, x2, ransac_n_iter, ransac_thr):
    ...
    return E, inlier
```

Input: $x1 \in \mathbb{R}^{n \times 2}$ and $x2 \in \mathbb{R}^{n \times 2}$ are the set of correspondences. ransac_n_iter and ransac_thr are the number of iterations and the error threshold for RANSAC.

Output: $E \in \mathbb{R}^{3 \times 3}$ is an essential matrix, and $\text{inlier} \in \mathbb{Z}^k$ is the set of inlier indices

3D Computer Vision: HW2

Structure from Motion

where k is the number of inliers.

Description: You will implement 8-point algorithm (`EstimateE`) with RANSAC to find robust estimate of \mathbf{E} . You can visualize the filtered inliers based on RANSAC as shown in Figure 3 (in order to visualize in pixel space, you have to *unnormalize* the normalized coordinates by multiplying the intrinsic parameter.).

```
def BuildFeatureTrack(Im, K):
```

```
    ...
```

```
    return track
```

Input: $\text{Im} \in \mathbb{R}^{N \times H \times W \times 3}$ are the set of images where N is the number of images, and H, W are height and width of images. $K \in \mathbb{R}^{3 \times 3}$ is the intrinsic parameter.

Output: $\text{track} \in \mathbb{R}^{N \times F \times 2}$ is a feature tensor where F is the number of total features.

Note: `track` is expected to include only inlier matches. The coordinates of `track` are expected to be normalized by the intrinsic parameters `K`, which can improve numerical stability. You will use SIFT matching function that you implemented for HW1:

```
def MatchSIFT(loc1, desc1, loc2, desc2):
```

```
    ...
```

```
    return x1, x2, ind1
```

This SIFT matching includes a ratio test and bidirectional consistency check. Unlike HW1, you will return not only $x1, x2 \in \mathbb{R}^{m \times 2}$ but also $\text{ind1} \in \mathbb{Z}^m$, the indices of $x1$ in loc1 , i.e., $\text{loc1}[\text{ind1}, :] = x1$. m is the number of matches.

3D Computer Vision: HW2

Structure from Motion

4 Estimating Camera Pose

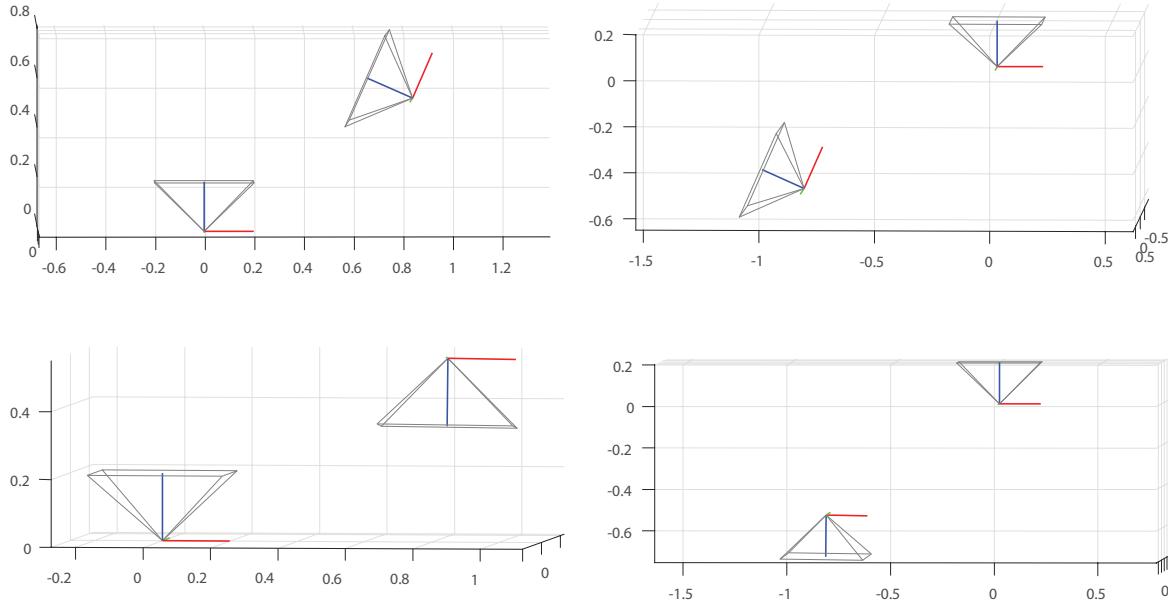


Figure 4: Four configurations of camera pose from a fundamental matrix.

Given an essential matrix, you can compute find four configurations of camera poses as shown in Figure 4. Given the four camera configurations, you will find the best configuration by taking into account chirality, i.e., the triangulated point must be in front of both cameras. Pseudo-code of pose estimation can be found in Algorithm 3

Algorithm 3 EstimateCameraPose

- | | |
|--|-----------------------------|
| 1: Compute essential matrix given tracks | ▷ EstimateE_RANSAC |
| 2: Estimate four configurations of poses | ▷ GetCameraPoseFromE |
| 3: for $i = 0, 1, 2, 3$ do | |
| 4: Triangulate points using for each configuration | ▷ Triangulation |
| 5: Evaluate chirality for each configuration | ▷ EvaluateChirality |
| 6: end for | |
-

3D Computer Vision: HW2

Structure from Motion

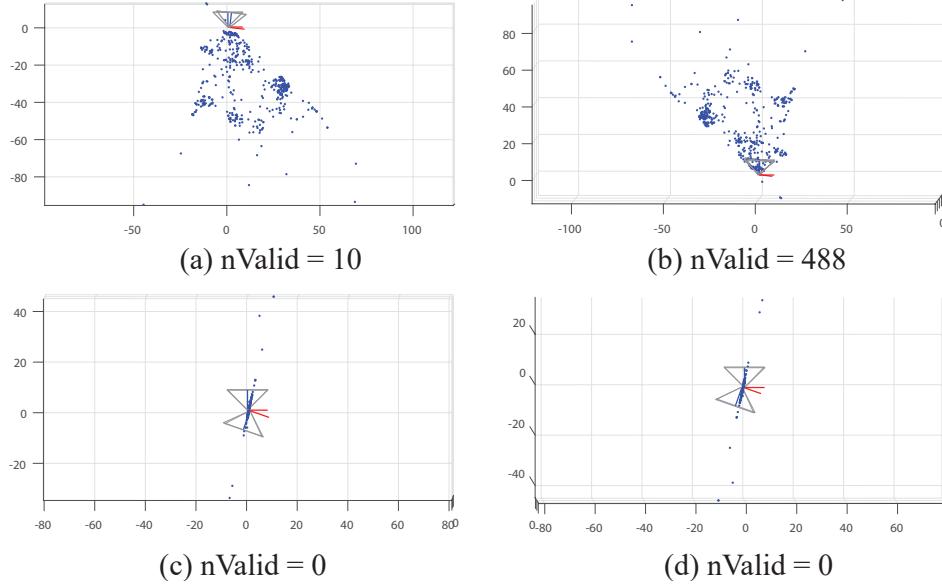


Figure 5: Visualization of camera configurations and their point clouds. (b) produces the maximum valid points that satisfy the cheirality condition.

```
def GetCameraPoseFromE(E):
    ...
    return R_set, C_set
```

Input: $E \in \mathbb{R}^{3 \times 3}$ is rank 2 essential matrix.

Output: $R_{\text{set}} \in \mathbb{R}^{4 \times 3 \times 3}$ is the set of four rotation matrices, and $C_{\text{set}} \in \mathbb{R}^{4 \times 3}$ is the set of four camera centers.

Description: Given an essential matrix, you can find four configurations of rotation and camera center.

```
def Triangulation(P1, P2, track1, track2):
    ...
    return X
```

Input: $P_1, P_2 \in \mathbb{R}^{3 \times 4}$ are two camera projection matrices, and $\text{track1}, \text{track2} \in \mathbb{R}^{n \times 2}$ are point correspondences from the two poses. n is the number of 2D points.

Output: $X \in \mathbb{R}^{n \times 3}$ is the set of 3D points. For the invalid point matches ($\text{track1}=-1$ or $\text{track2}=-1$), the corresponding row of X can be set to -1 to indicate an invalid reconstruction.

Description: You will use the linear triangulation method to triangulate the point.

3D Computer Vision: HW2

Structure from Motion



Figure 6: Camera pose estimation.

```
def EvaluateChirality(P1, P2, X):
```

• • •

```
return valid_index
```

Input: $P_1, P_2 \in \mathbb{R}^{3 \times 4}$ are two camera projection matrices, and $X \in \mathbb{R}^{n \times 3}$ are the set of 3D points.

Output: $\text{valid_index} \in \{0, 1\}^n$ is the binary vector indicating the cheirality condition, i.e., one if the point is in front of both cameras and zero otherwise. You may visualize the camera and point cloud to validate cheirality as shown in Figure 5.

```
def EstimateCameraPose(track1, track2):
```

• • •

return R, C, X

Input: $\text{track1}, \text{track2} \in \mathbb{R}^{F \times 2}$ are correspondences.

Output: $R \in SO(3)$ is the rotation matrix (orthogonal matrix), $C \in \mathbb{R}^3$ is the camera center, and $X \in \mathbb{R}^{F \times 3}$ is the set of 3D reconstructed points.

Description: You will return the best pose configuration of which the number of valid 3D points is maximum.

3D Computer Vision: HW2

Structure from Motion

5 Perspective-n-Point algorithm

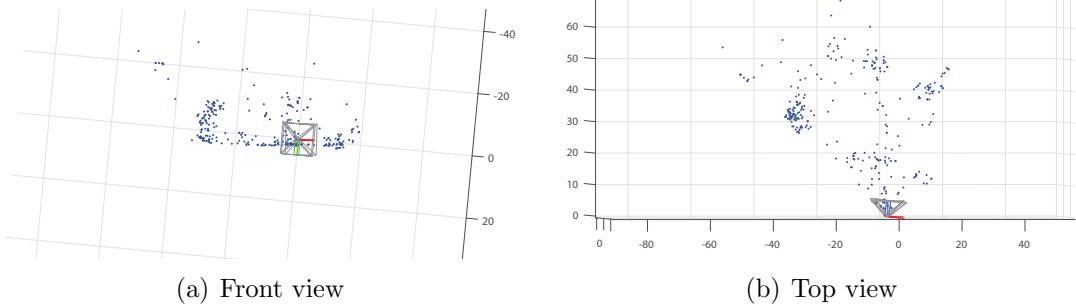


Figure 7: You will implement a perspective-n-point algorithm to register a new image given a 3D reconstruction of points.

Given the 3D reconstruction of points, you will register a new image using 3D-2D correspondences using a linear perspective-n-point algorithm with RANSAC. This linear estimate will be refined by minimizing the reprojection error:

$$\underset{\mathbf{p}}{\text{minimize}} \quad \sum_i^n \|f(\mathbf{p}, \mathbf{X}_i) - \mathbf{b}_i\|^2, \quad (2)$$

where \mathbf{p} is the vectorized camera pose made of the camera center and quaternion, i.e., $\mathbf{p} = [\mathbf{C}^\top \mathbf{q}^\top]^\top$. $f(\mathbf{p}, \mathbf{X}_i)$ is the projection of the i^{th} 3D point \mathbf{X}_i onto the camera \mathbf{p} , i.e.,

$$f(\mathbf{p}, \mathbf{X}_i) = \begin{bmatrix} u_i/w_i \\ v_i/w_i \end{bmatrix}, \quad \text{where} \quad \begin{bmatrix} u_i \\ v_i \\ w_i \end{bmatrix} = \mathbf{R} \begin{bmatrix} \mathbf{I}_3 & -\mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{X}_i \\ 1 \end{bmatrix} \quad (3)$$

where $\mathbf{X}_i \in \mathbb{R}^3$ is the i^{th} 3D point. \mathbf{b}_i is the i^{th} 2D point from `track`, i.e., $\mathbf{b}_i = [x_i \ y_i]^\top$.

Equation (2) can be minimized by updating the camera pose \mathbf{p} using the Levenberg-Marquardt method:

$$\mathbf{p} = \mathbf{p} + \Delta\mathbf{p}, \quad \text{where } \Delta\mathbf{p} = \left(\sum_i^n \frac{\partial f_i}{\partial \mathbf{p}}^\top \frac{\partial f_i}{\partial \mathbf{p}} + \lambda \mathbf{I} \right)^{-1} \sum_i^n \frac{\partial f_i}{\partial \mathbf{p}}^\top (\mathbf{b}_i - f_i), \quad (4)$$

where $\frac{\partial f_i}{\partial \mathbf{p}} \in \mathbb{R}^{2 \times 7}$ is the pose Jacobian for the i^{th} point (we denote $f(\mathbf{p}, \mathbf{X}_i)$ by f_i by an abuse of notation.). λ is the damping parameter, and you can try $\lambda \in [0, 10]$.

3D Computer Vision: HW2

Structure from Motion

```
def PnP(X, x):  
    ...  
    return R, C
```

Input: $X \in \mathbb{R}^{n \times 3}$ is the set of reconstructed 3D points, and $x \in \mathbb{R}^{n \times 2}$ is the 2D points of the new image where n is the number of points.

Output: $R \in SO(3)$ is the rotation matrix (orthogonal matrix), $C \in \mathbb{R}^3$ is the camera center.

Description: You will implement linear perspective-n-point algorithm.

```
def PnP_RANSAC(X, x, ransac_n_iter, ransac_thr):  
    ...  
    return R, C, inlier
```

Input: $X \in \mathbb{R}^{n \times 3}$ is the set of reconstructed 3D points, and $x \in \mathbb{R}^{n \times 2}$ is the 2D points of the new image where n is the number of points. `ransac_n_iter` and `ransac_thr` are the number of iterations and threshold for RANSAC.

Output: $R \in SO(3)$ is the rotation matrix (orthogonal matrix), $C \in \mathbb{R}^3$ is the camera center, and `inlier` $\in \{0, 1\}^{n \times 1}$ is indicator of inliers, i.e., one if the point is one of inliers, and zero otherwise.

Description: You will estimate pose using PnP with RANSAC. An inlier is the one that has a smaller error than the threshold and satisfies cheirality.

3D Computer Vision: HW2

Structure from Motion

```
def Rotation2Quaternion(R):  
    ...  
    return q
```

Input: $R \in SO(3)$ is rotation matrix.

Output: $q \in \mathbb{R}^4$ is unit quaternion.

Note: q is normalized before return.

You do not have to implement this function. The function is given.

```
def Quaternion2Rotation(q):  
    ...  
    return R
```

Input: $q \in \mathbb{R}^4$ is unit quaternion.

Output: $R \in SO(3)$ is rotation matrix.

Note: R is an orthogonal matrix.

You do not have to implement this function. The function is given.

```
def ComputePoseJacobian(p, X):  
    ...  
    return dfdp
```

Input: $p \in \mathbb{R}^7$ is the camera pose made of camera center (\mathbb{R}^3) and quaternion (\mathbb{R}^4).
 $X \in \mathbb{R}^3$ is the 3D point.

Output: $dfdp \in \mathbb{R}^{2 \times 7}$ is the pose Jacobian, i.e., $\partial f_i / \partial p$.

You do not have to implement this function. The function is given.

```
def PnP_nl(R, C, X, x):  
    ...  
    return R_refined, C_refined
```

Input: $R \in SO(3)$ and $C \in \mathbb{R}^3$ are the refined rotation and camera center by PnP.
 $X \in \mathbb{R}^{n \times 3}$ is the 3D points, and $x \in \mathbb{R}^{n \times 3}$ is the 2D point where n is the number of points.

Output: $R_{\text{refined}} \in SO(3)$ and $C_{\text{refined}} \in \mathbb{R}^3$ are the refined rotation and camera center via nonlinear optimization.

Note: `ComputePoseJacobian` is used to update the pose. The pose update via Equation (6) does not enforce the quaternion to be unit length. After update, the unit length, i.e., $q = \frac{q}{\|q\|}$ is enforced. After optimization, you can visualize the reduction of reprojection error (0.19 → 0.11)

You do not have to implement this function. The function is given.

3D Computer Vision: HW2

Structure from Motion

6 Reconstructing 3D Points

Given a newly registered image, you will reconstruct 3D points that have not reconstructed yet. You find the points that will be newly added and reconstruct the points using **Triangulation**. These linearly estimated points will be refined by minimizing the reprojection error for each point:

$$\underset{\mathbf{X}_j}{\text{minimize}} \quad \sum_{k=1}^2 \|f(\mathbf{p}_k, \mathbf{X}_j) - \mathbf{b}_{k,j}\|^2, \quad (5)$$

where \mathbf{X}_j is the j^{th} 3D point, \mathbf{p}_k is the k^{th} camera pose for triangulation, and $\mathbf{b}_{k,j}$ is the j^{th} 2D point on the k^{th} image from **track**. We consider $k = 1, 2$ where a point is triangulated by two camera poses.

Equation (5) can be minimized by updating the camera pose \mathbf{X} using the Levenberg-Marquardt method:

$$\mathbf{X}_j = \mathbf{X}_j + \Delta \mathbf{X}_j \quad \text{where } \Delta \mathbf{X}_j = \sum_{k=1}^2 \left(\frac{\partial f_{k,j}}{\partial \mathbf{X}}^\top \frac{\partial f_{k,j}}{\partial \mathbf{X}} + \lambda \mathbf{I} \right)^{-1} \frac{\partial f_{k,j}}{\partial \mathbf{X}}^\top (\mathbf{b}_{k,j} - f_{k,j}), \quad (6)$$

where $\frac{\partial f_{k,j}}{\partial \mathbf{X}} \in \mathbb{R}^{2 \times 3}$ is the point Jacobian for the j^{th} point (we denote $f(\mathbf{p}_k, \mathbf{X}_j)$ by $f_{k,j}$ by an abuse of notation.). λ is the damping parameter, and you can try $\lambda \in [0, 10]$.

3D Computer Vision: HW2

Structure from Motion

```
def FindMissingReconstruction(X, track_i):  
    ...  
    return new_point
```

Input: $X \in \mathbb{R}^{F \times 3}$ is the 3D points, and $track_i \in \mathbb{R}^{F \times 2}$ is the 2D points of the newly registered image.

Output: $new_point \in \{0, 1\}^{F \times 1}$ is a set of indicators that indicate new points.

Note: The new points are the points that are valid for the new image and are not reconstructed yet, i.e.,

$$new_point_i = \begin{cases} 1 & \text{if } X_i = -1, \ track_i \neq -1 \\ 0 & \text{otherwise} \end{cases}, \quad (7)$$

where X_i and $track_i$ are the i^{th} 3D and 2D points.

```
def ComputePointJacobian(X, p):  
    ...  
    return dfdX
```

Input: $X \in \mathbb{R}^3$ is the 3D point, and $p \in \mathbb{R}^7$ is the camera pose made of camera center (\mathbb{R}^3) and quaternion (\mathbb{R}^4).

Output: $dfdX \in \mathbb{R}^{2 \times 3}$ is the point Jacobian, i.e., $\partial f_{k,j} / \partial X$.

You do not have to implement this function. The function is given.

```
def Triangulation_nl(X, P1, P2, x1, x2):  
    ...  
    return X_new
```

Input: $X \in \mathbb{R}^{n \times 3}$ is 3D points, $P1, P2 \in \mathbb{R}^{3 \times 4}$ are two camera projection matrices, and $x1, x2 \in \mathbb{R}^{n \times 2}$ are point correspondences from the two poses.

Output: $X_new \in \mathbb{R}^{n \times 3}$ is the set of refined 3D points.

You do not have to implement this function. The function is given.

3D Computer Vision: HW2

Structure from Motion

7 Running Bundle Adjustment

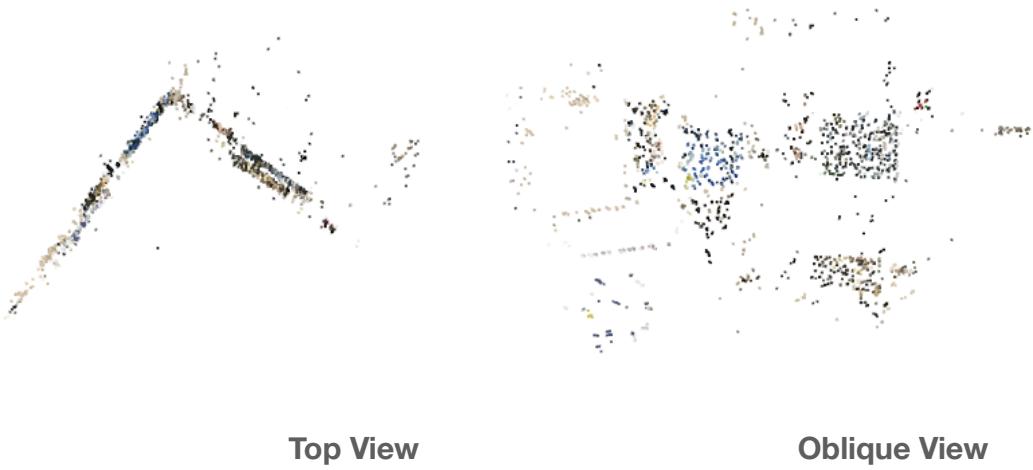


Figure 8: You will reconstruct all images and 3D points using structure from motion.

You will use a nonlinear least squares optimization to refine the camera pose and reconstructed points all together by minimizing the reprojection error:

$$\underset{\{\mathbf{p}_k\}\{\mathbf{X}_j\}}{\text{minimize}} \sum_{k=1}^K \sum_{j=1}^J s_{k,j} \|f(\mathbf{p}_k, \mathbf{X}_j) - \mathbf{b}_{k,j}\|^2, \quad (8)$$

where K is the number of images, and J is the number of 3D points. $s_{k,j} = \{0, 1\}$ is the visibility indicator, i.e., one if the j^{th} point is visible to the k^{th} camera, and zero otherwise:

$$s_{k,j} = \begin{cases} 1 & \text{if } \mathbf{b}_{k,j} \neq -1 \\ 0 & \text{otherwise.} \end{cases} \quad (9)$$

You will use `scipy.optimize.least_squares` to optimize Equation (8). The pseudo-code is found in Algorithm 4.

3D Computer Vision: HW2

Structure from Motion

Algorithm 4 RunBundleAdjustment

- 1: Setup bundle adjustment. ▷ SetupBundleAdjustment
 - 2: Run sparse bundle adjustment.
 - 3: Update the poses and 3D points. ▷ UpdatePosePoint
-

```
def SetupBundleAdjustment(P, X, track):
```

```
    ...
```

```
    return z, b, S, camera_index, point_index
```

Input: $P \in \mathbb{R}^{K \times 3 \times 4}$ is the set of reconstructed camera poses, $X \in \mathbb{R}^{J \times 3}$ is the set of reconstructed 3D points, $track \in \mathbb{R}^{K \times J \times 2}$ is the tracks for the reconstructed cameras.

Output: $z \in \mathbb{R}^{7K+3J}$ is the optimization variable that is made of all camera poses and 3D points, i.e.,

You do not have to implement this function. The function is given.

$$z = \begin{bmatrix} \mathbf{p}_1 \\ \vdots \\ \mathbf{p}_K \\ \mathbf{X}_1 \\ \vdots \\ \mathbf{X}_F \end{bmatrix} \quad (10)$$

where $\mathbf{p}_i = [\mathbf{C}_i^T \ \mathbf{q}_i^T]^T \in \mathbb{R}^7$ is the i^{th} camera pose (center and quaternion), and $\mathbf{X}_j \in \mathbb{R}^3$ is the j^{th} 3D point.

$b \in \mathbb{R}^{2M}$ is the 2D points in $track$ where M is the number of 2D visible points, i.e., not all points in $track$ are visible (only $s_{k,j} = 1$ should be included.).

$S \in \{0, 1\}^{2M \times (7K+3J)}$ is a sparse indicator matrix that indicates the locations of Jacobian computation. Jacobian is only valid when $s_{k,j} = 1$. Consider the m^{th} measurement made by the projection of the j^{th} 3D point (\mathbf{X}_j) onto the k^{th} camera (\mathbf{p}_k) in Equation (8). The pose Jacobian entries correspond to $S[2m:2m+1, 7k:7k+6]=1$ and point Jacobian entries are $S[2m:2m+1, 7K+3*j:7K+3*j+2]=1$.

Note: For the first two camera poses, you do not want to update through the Jacobian, i.e., $S[2m:2m+1, 7k:7k+6]=0$ for $m=1, 2$.

$camera_index \in \mathbb{Z}^M$ specifies the index of the camera for each measurement, i.e., $camera_index=k$, and $point_index \in \mathbb{Z}^M$ specifies the index of 3D point for each measurement, i.e., $point_index=j$.

3D Computer Vision: HW2

Structure from Motion

```
def MeasureReprojection(z, b, n_cameras, n_points, camera_index, point_index):
    ...
    return err
```

Input: $z \in \mathbb{R}^{21KJ}$ is the optimization variable, $b \in \mathbb{R}^{2M}$ is the 2D measured points, $n_{cameras}$ and n_{points} are the number of cameras and 3D points, respectively, and $camera_index, point_index \in \mathbb{Z}^M$ are the indices of camera and 3D point.

Output: $err \in \mathbb{R}^{2M}$ is the reprojection error, i.e., the aggregate of all reprojection errors.

Description: This function can be called during optimization (`least_squares`) to evaluate the reprojection error, e.g.,

```
res = least_squares(MeasureReprojection, z0, jac_sparsity=S, verbose=2,
                     x_scale='jac', ftol=1e-4, method='trf',
                     args=(b, n_cameras, n_points,
                           camera_index, point_index))
```

You do not have to implement this function. The function is given.

```
def UpdatePosePoint(z, n_cameras, n_points):
    ...
    return P_new, X_new
```

Input: $z \in \mathbb{R}^{21KJ}$ is the optimization variable, and $n_{cameras}$ and n_{points} are the number of cameras and 3D points, respectively.

Output: $P_{new} \in \mathbb{R}^{K \times 3 \times 4}$ is the set of refined camera poses, $X_{new} \in \mathbb{R}^{J \times 3}$ is the refined 3D points.

You do not have to implement this function. The function is given.

```
def RunBundleAdjustment(P, X, track):
    ...
    return P_new, X_new
```

Input: $P \in \mathbb{R}^{K \times 3 \times 4}$ is the set of reconstructed camera poses, $X \in \mathbb{R}^{J \times 3}$ is the set of reconstructed 3D points, $track \in \mathbb{R}^{K \times J \times 2}$ is the tracks for the reconstructed cameras.

Output: $P_{new} \in \mathbb{R}^{K \times 3 \times 4}$ is the set of refined camera poses, $X_{new} \in \mathbb{R}^{J \times 3}$ is the refined 3D points. You can use `MeasureReprojection` to measure the reprojection error before and after bundle adjustment to see the error reduction.

You do not have to implement this function. The function is given.

3D Computer Vision: HW2

Structure from Motion

8 Extra Credit

For a bonus problem of **20 points** (*HW2 total score: 100 points*), run SFM with your own input images from your written code. Pictures taken at SNU would be great!

To do so, you will need to find the camera intrinsic parameters (**K**) as shown in class, using the **Caltech Calibration toolbox** or **OpenCV**. Do not forget to fix your focal length during the calibration and scene captures (otherwise your calibration would not be valid).

Please submit the input images and additional .pdf file containing results like feature matching examples, epipolar lines, Meshlab output images and codes for reproduction.