

[544] Networking

Tyler Caraza-Harter

Outline

Networks

Internets and "The Internet"

Transport Protocols

Network Interface Controllers and MAC Addresses




NICs can connect a computer to different physical mediums, such as:

- Ethernet (wired)
- Wi-Fi (wireless)

Every NIC in the world has a unique MAC (media access control) address

- 28 trillion possible addrs
- some devices randomly change their MAC addr for privacy

MAC address:

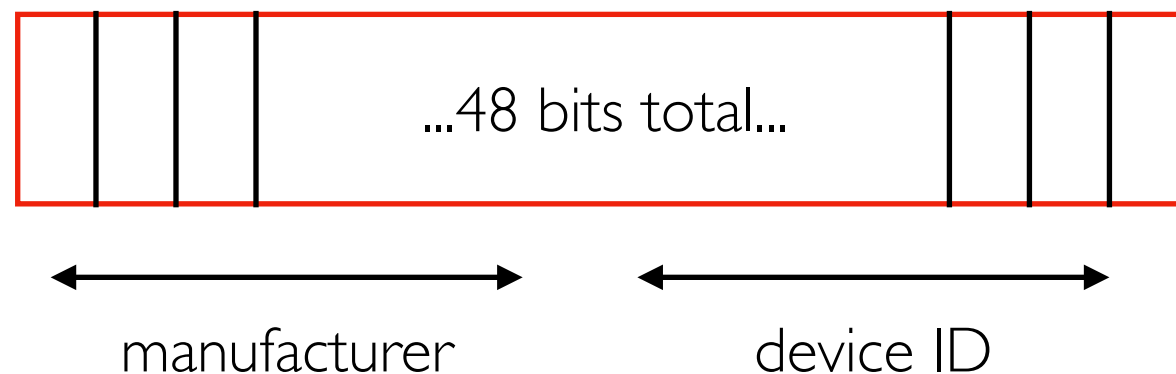

ifconfig (Interface Config)

interface

MAC address

```
trh@instance-1:~$ ifconfig
ens4: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
    inet 10.128.0.36 netmask 255.255.255.255 broadcast 0.0.0.0
    inet6 fe80::4001:aff:fe80:24 prefixlen 64 scopeid 0x20<link>
    ether 42:01:0a:80:00:24 txqueuelen 1000 (Ethernet)
    RX packets 2332795 bytes 6456770667 (6.4 GB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 1994116 bytes 718670305 (718.6 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 407321 bytes 417582056 (417.5 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 407321 bytes 417582056 (417.5 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

`sudo apt install net-tools`

Virtual Interfaces

```
trh@instance-1:~$ ifconfig
ens4: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1460
    inet 10.128.0.36  netmask 255.255.255.255  broadcast 0.0.0.0
    inet6 fe80::4001:aff:fe80:24  prefixlen 64  scopeid 0x20<link>
    ether 42:01:0a:80:00:24  txqueuelen 1000  (Ethernet)
    RX packets 2332795  bytes 6456770667 (6.4 GB)
    RX errors 0  dropped 0  overruns 0  frame 0
    TX packets 1994116  bytes 718670305 (718.6 MB)
    TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0
```

```
lo: flags=73<UP,LOOPBACK,RUNNING>  mtu 65536
    inet 127.0.0.1  netmask 255.0.0.0
    inet6 ::1  prefixlen 128  scopeid 0x10<host>
    loop txqueuelen 1000  (Local Loopback)
    RX packets 407321  bytes 417582056 (417.5 MB)
    RX errors 0  dropped 0  overruns 0  frame 0
    TX packets 407321  bytes 417582056 (417.5 MB)
    TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0
```

loopback (lo) device a virtual interface (not actual hardware)
connecting to a mini network containing just your computer

Google Console: Adding Interfaces (NICs)


Create Instance > Advanced Options > Networking

Network interfaces

Network interface is permanent

default default (10.128.0.0/20)	▼
other-net subnet (10.0.0.0/24)	▼
ADD NETWORK INTERFACE	

Virtual Machine Summary

<input type="checkbox"/>		instance-2	us-central1-a	10.128.0.37 (nic0)	34.29.220.248 (nic0)
				10.0.0.2 (nic1)	35.202.74.234 (nic1)

Google Console: Adding Interfaces

Create Instance > Advanced Options > Networking

Network interfaces 

```
trh@instance-2:~$ ifconfig
```

```
ens4: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
    inet 10.128.0.37 netmask 255.255.255.255 broadcast 0.0.0.0
    inet6 fe80::4001:aff:fe80:25 prefixlen 64 scopeid 0x20<link>
    ether 42:01:0a:80:00:25 txqueuelen 1000 (Ethernet)
    RX packets 637 bytes 546000 (546.0 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 612 bytes 97265 (97.2 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
ens5: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
    inet 10.0.0.2 netmask 255.255.255.255 broadcast 0.0.0.0
    inet6 fe80::4001:aff:fe00:2 prefixlen 64 scopeid 0x20<link>
    ether 42:01:0a:00:00:02 txqueuelen 1000 (Ethernet)
    RX packets 51 bytes 9955 (9.9 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 61 bytes 6834 (6.8 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```


```
lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 120 bytes 13534 (13.5 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 120 bytes 13534 (13.5 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

7	34.29.220.248 (nic0) 35.202.74.234 (nic1)
---	--

Networks

A **network** has **nodes** that send bytes to other nodes **by MAC address**


- **nodes**: computer, switch, etc
- direct, or **forwarded by switches**
- whole network uses same physical tech (Wi-Fi, Ethernet, etc)

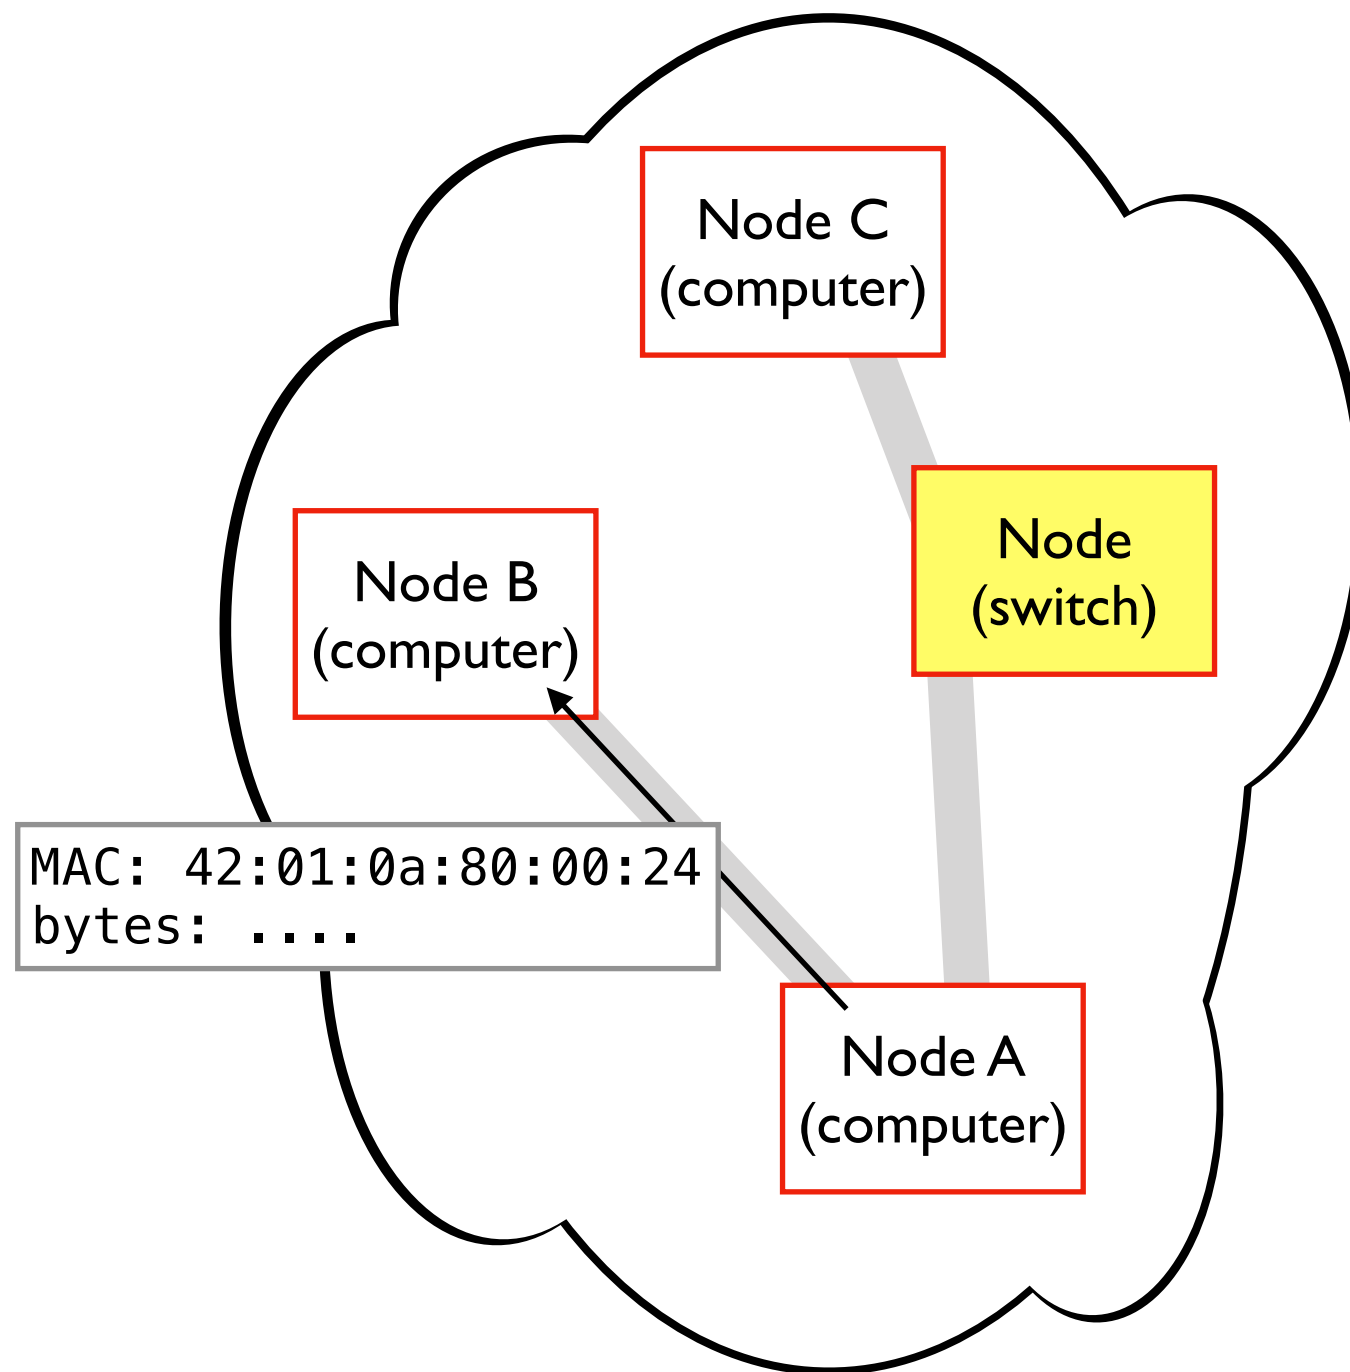

Networks

Computers can have multiple NICs

- can be on multiple networks (2 ethernets, ethernet+Wi-Fi, etc)
- can't send to a MAC addr in another network without a NIC there

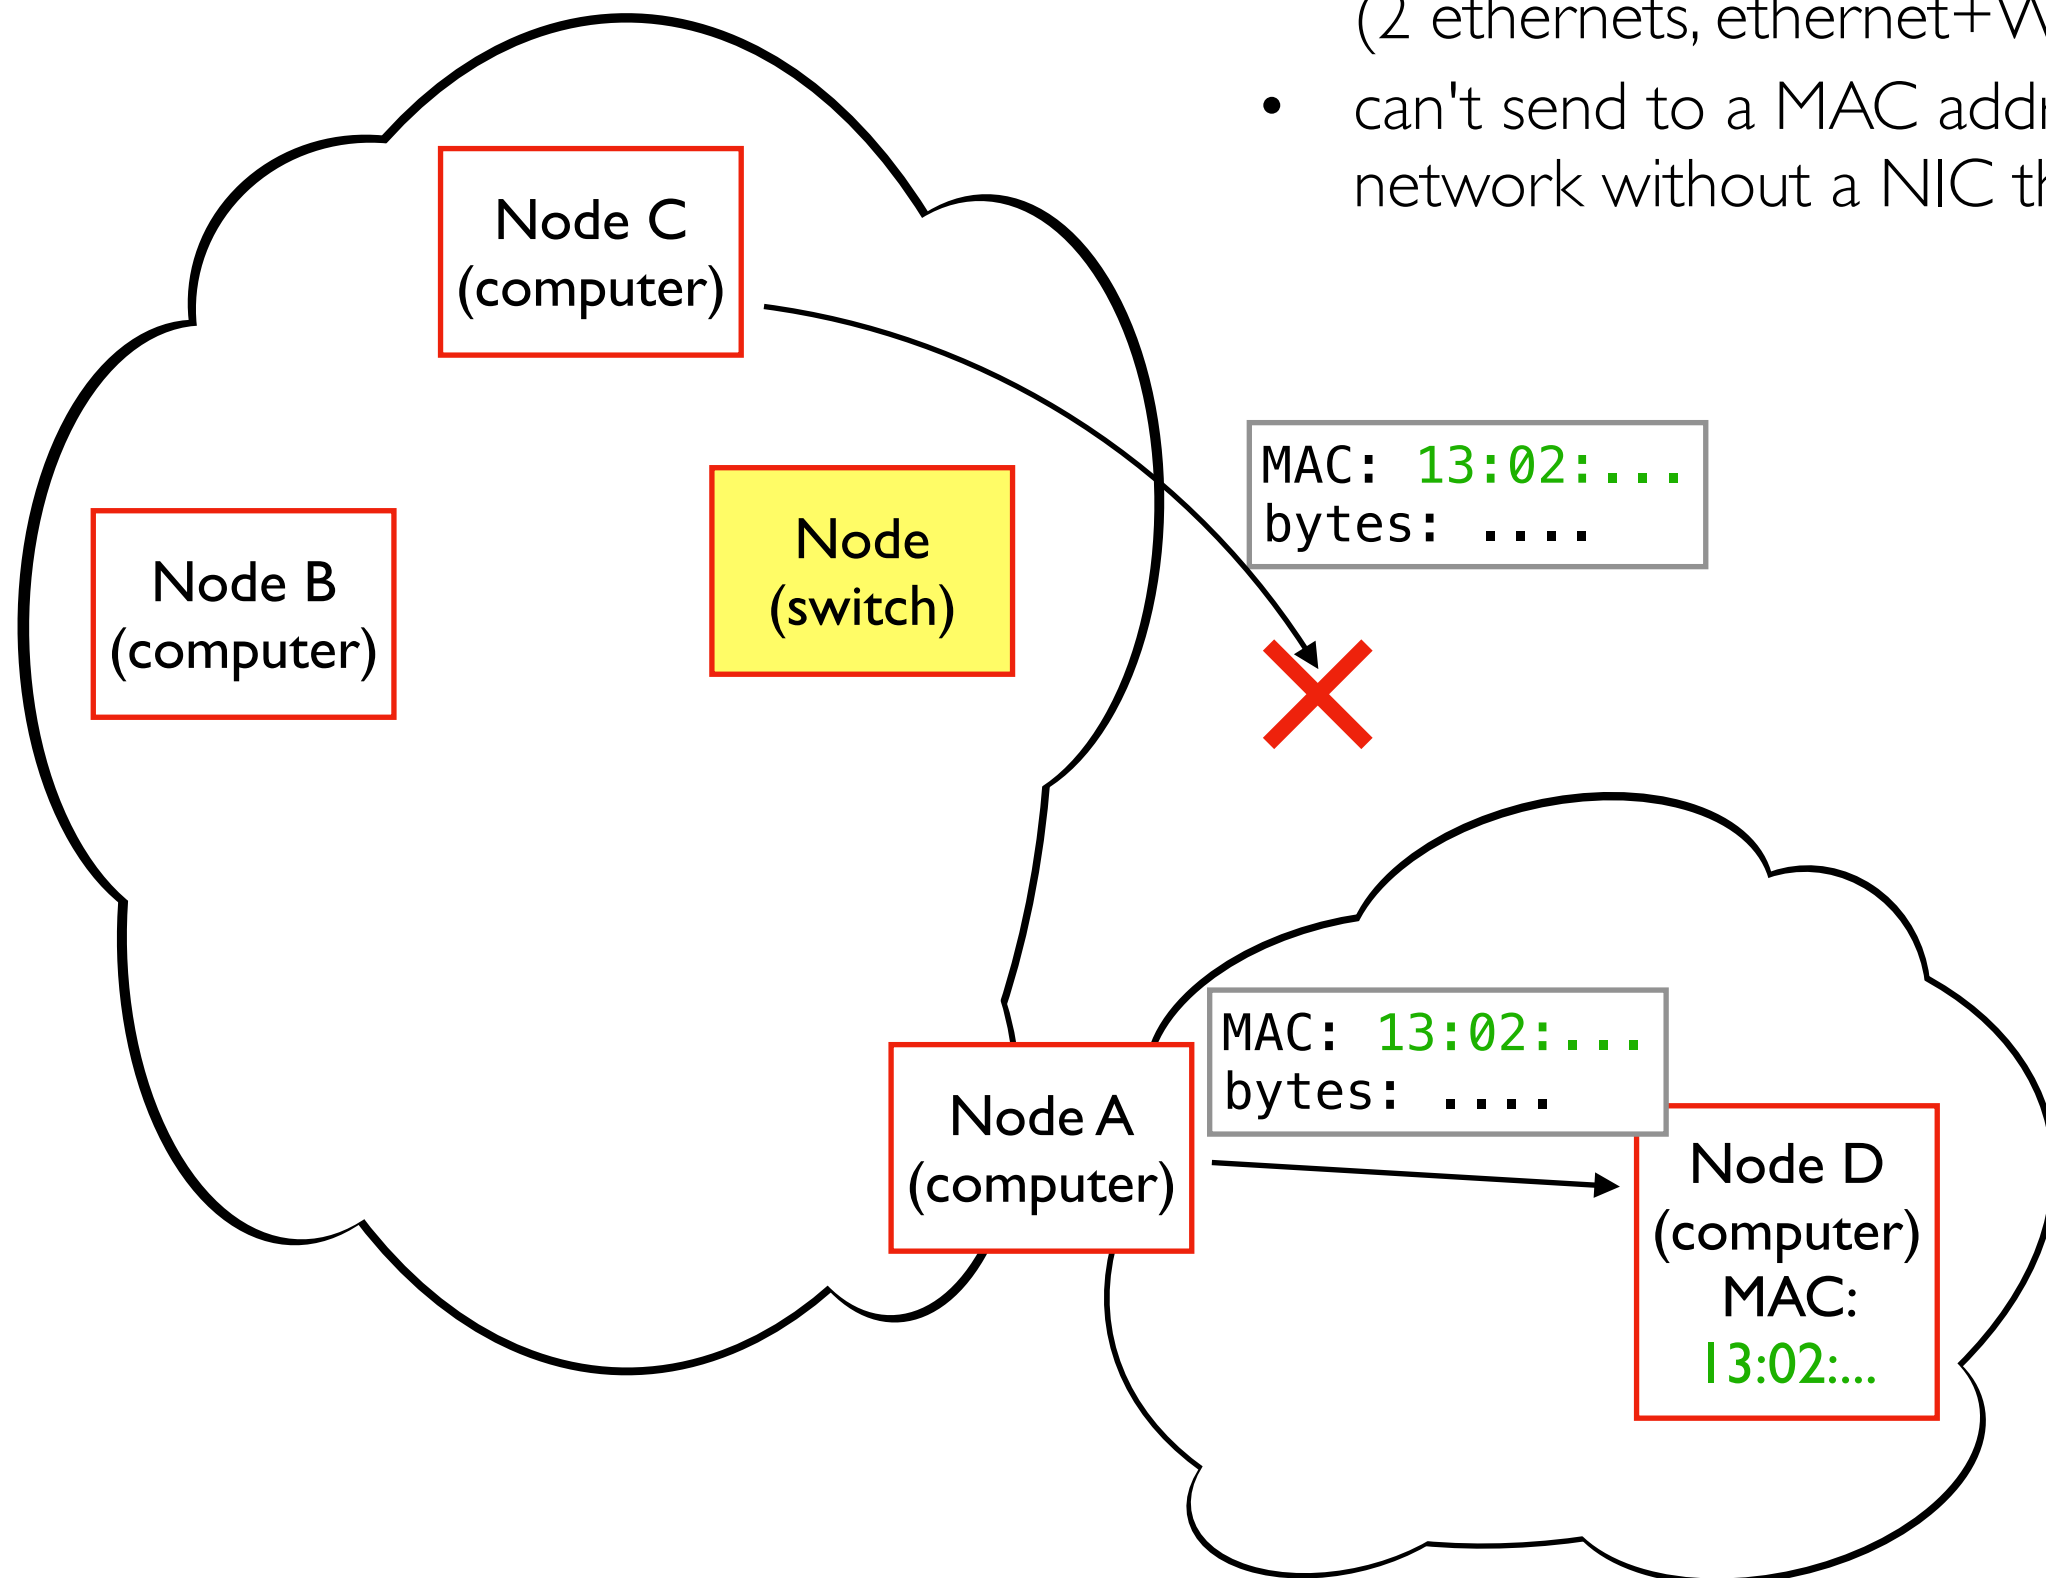


Outline

Networks

Internets and "The Internet"

Transport Protocols

Routers

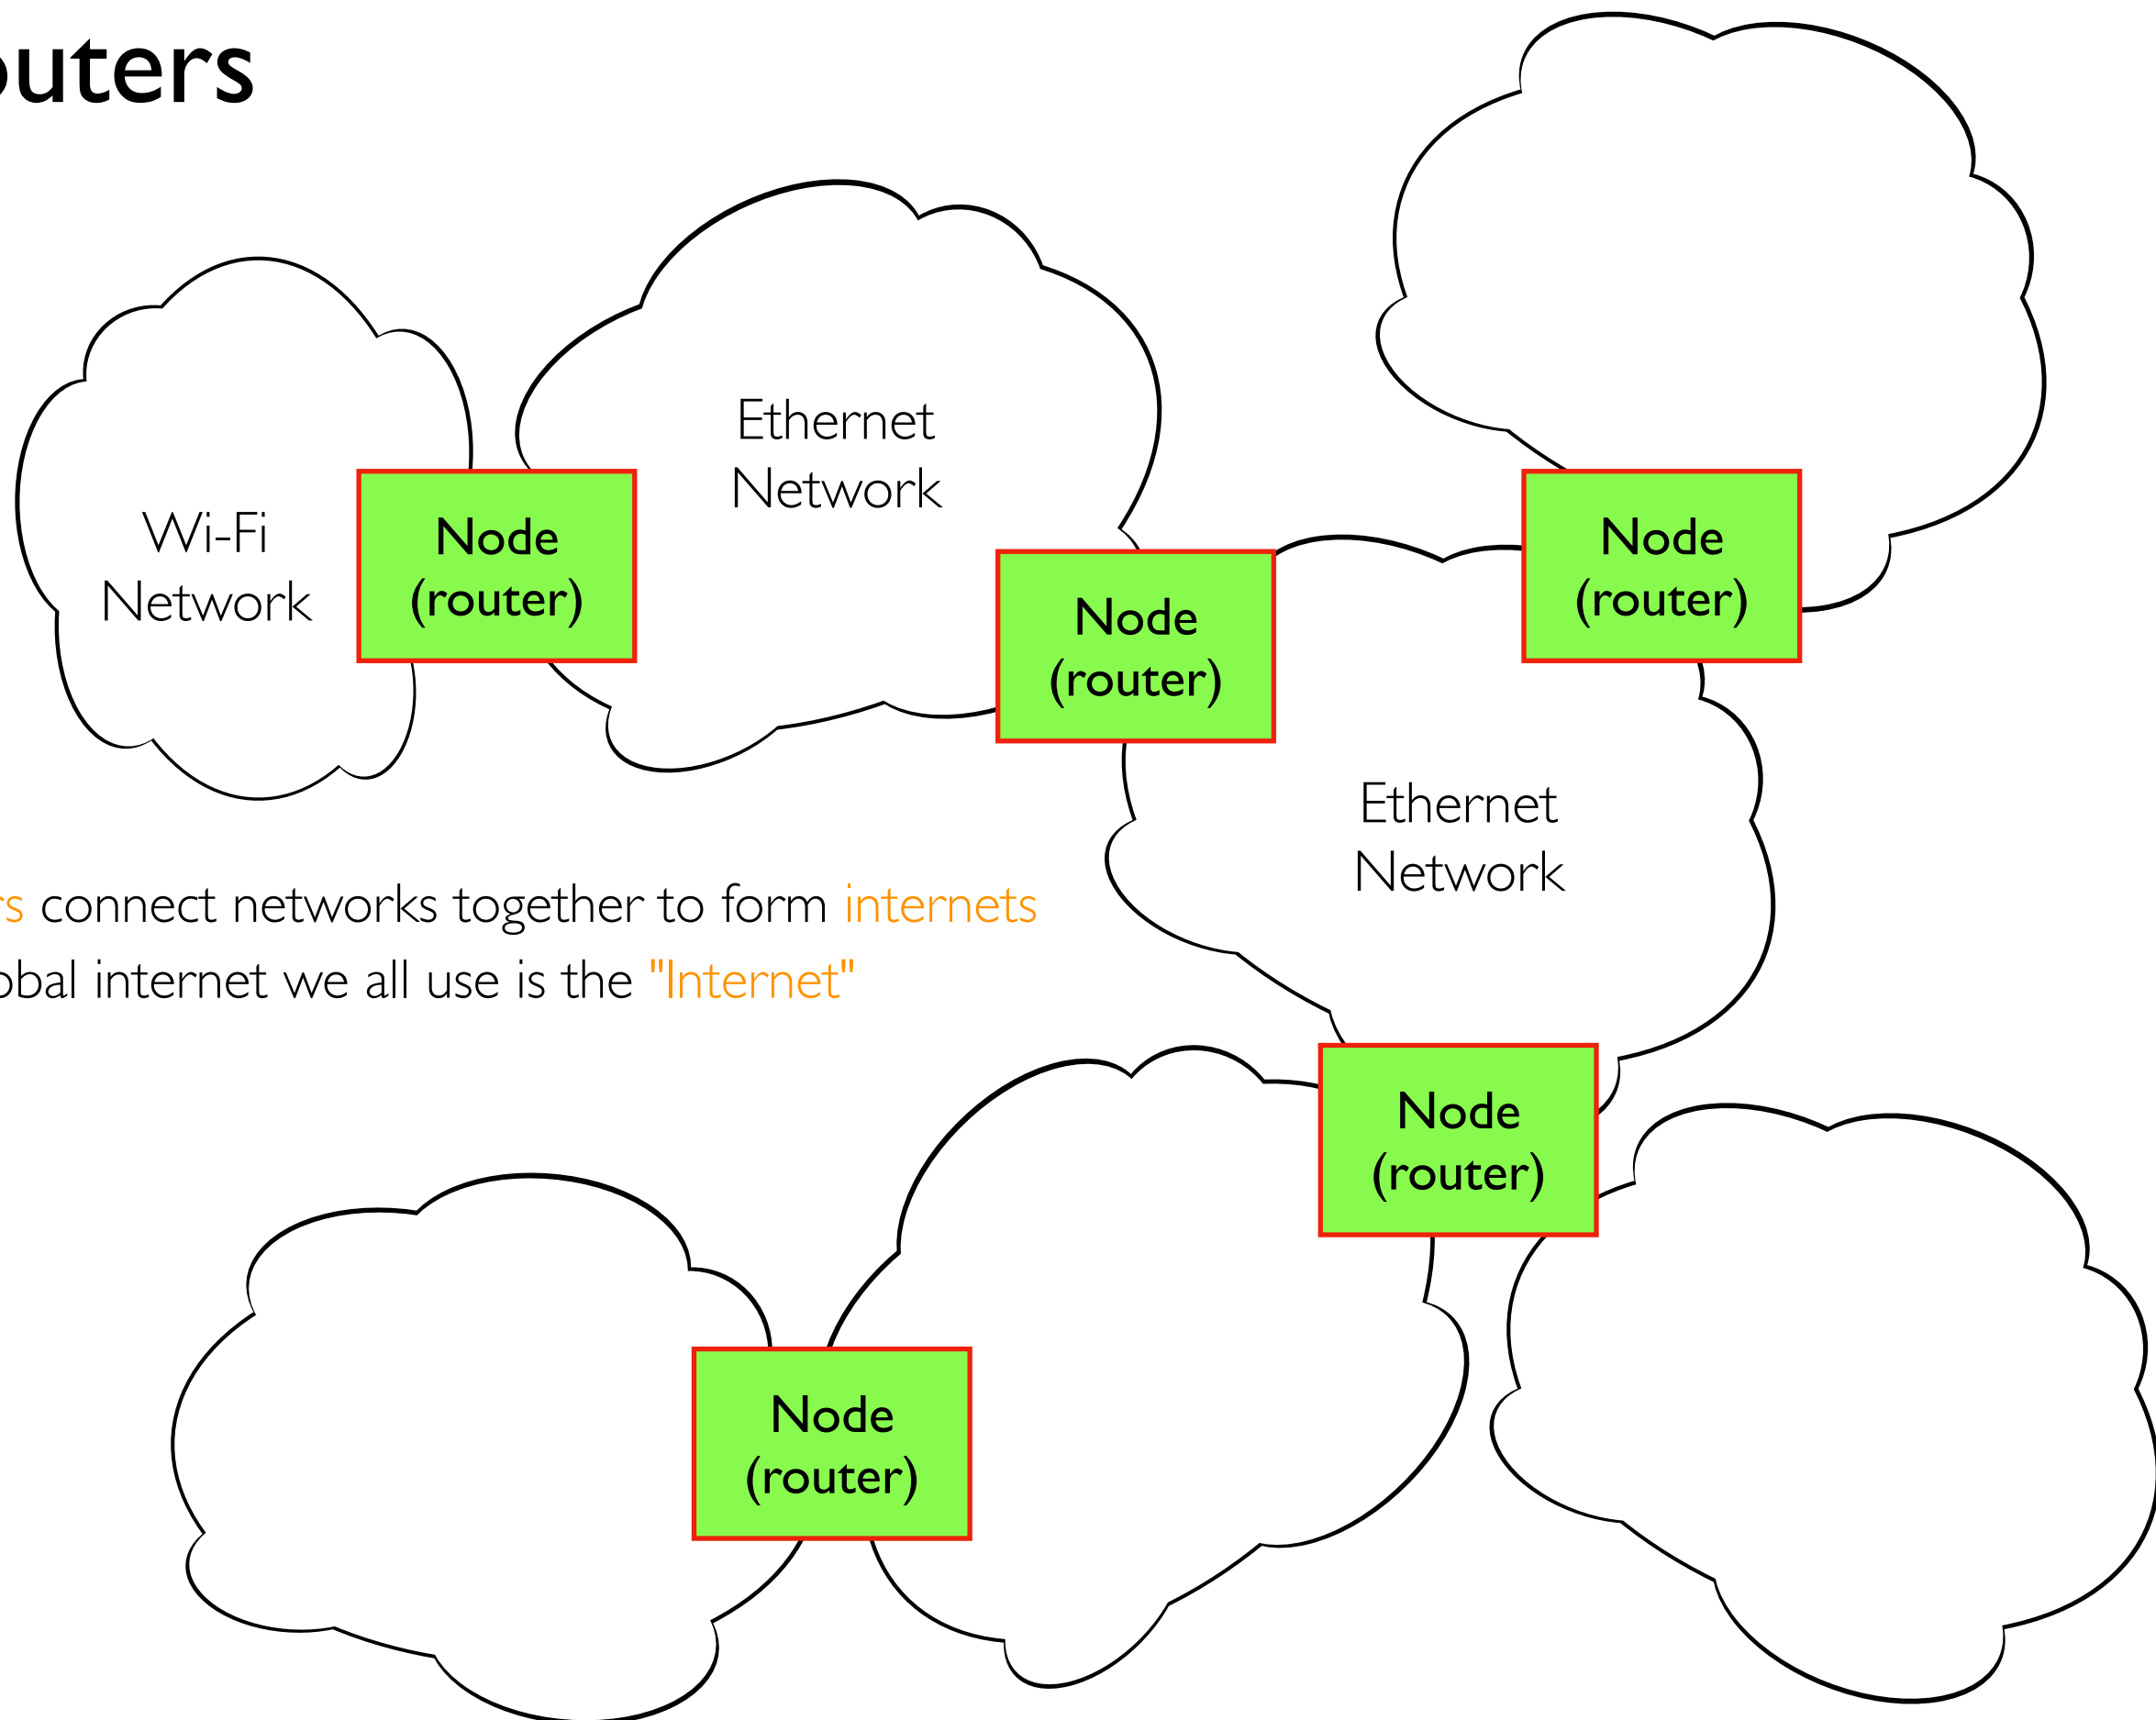


- routers connect networks together to form internets
- the global internet we all use is the "Internet"

Packet Forwarding

Packets (some bytes with an address and other info) can be forwarded along a path from point A to point B



- routers contain **forwarding tables** that help them decide which direction to send along a packet
- those tables would be too big if a router had to know where every MAC address existed in the Internet

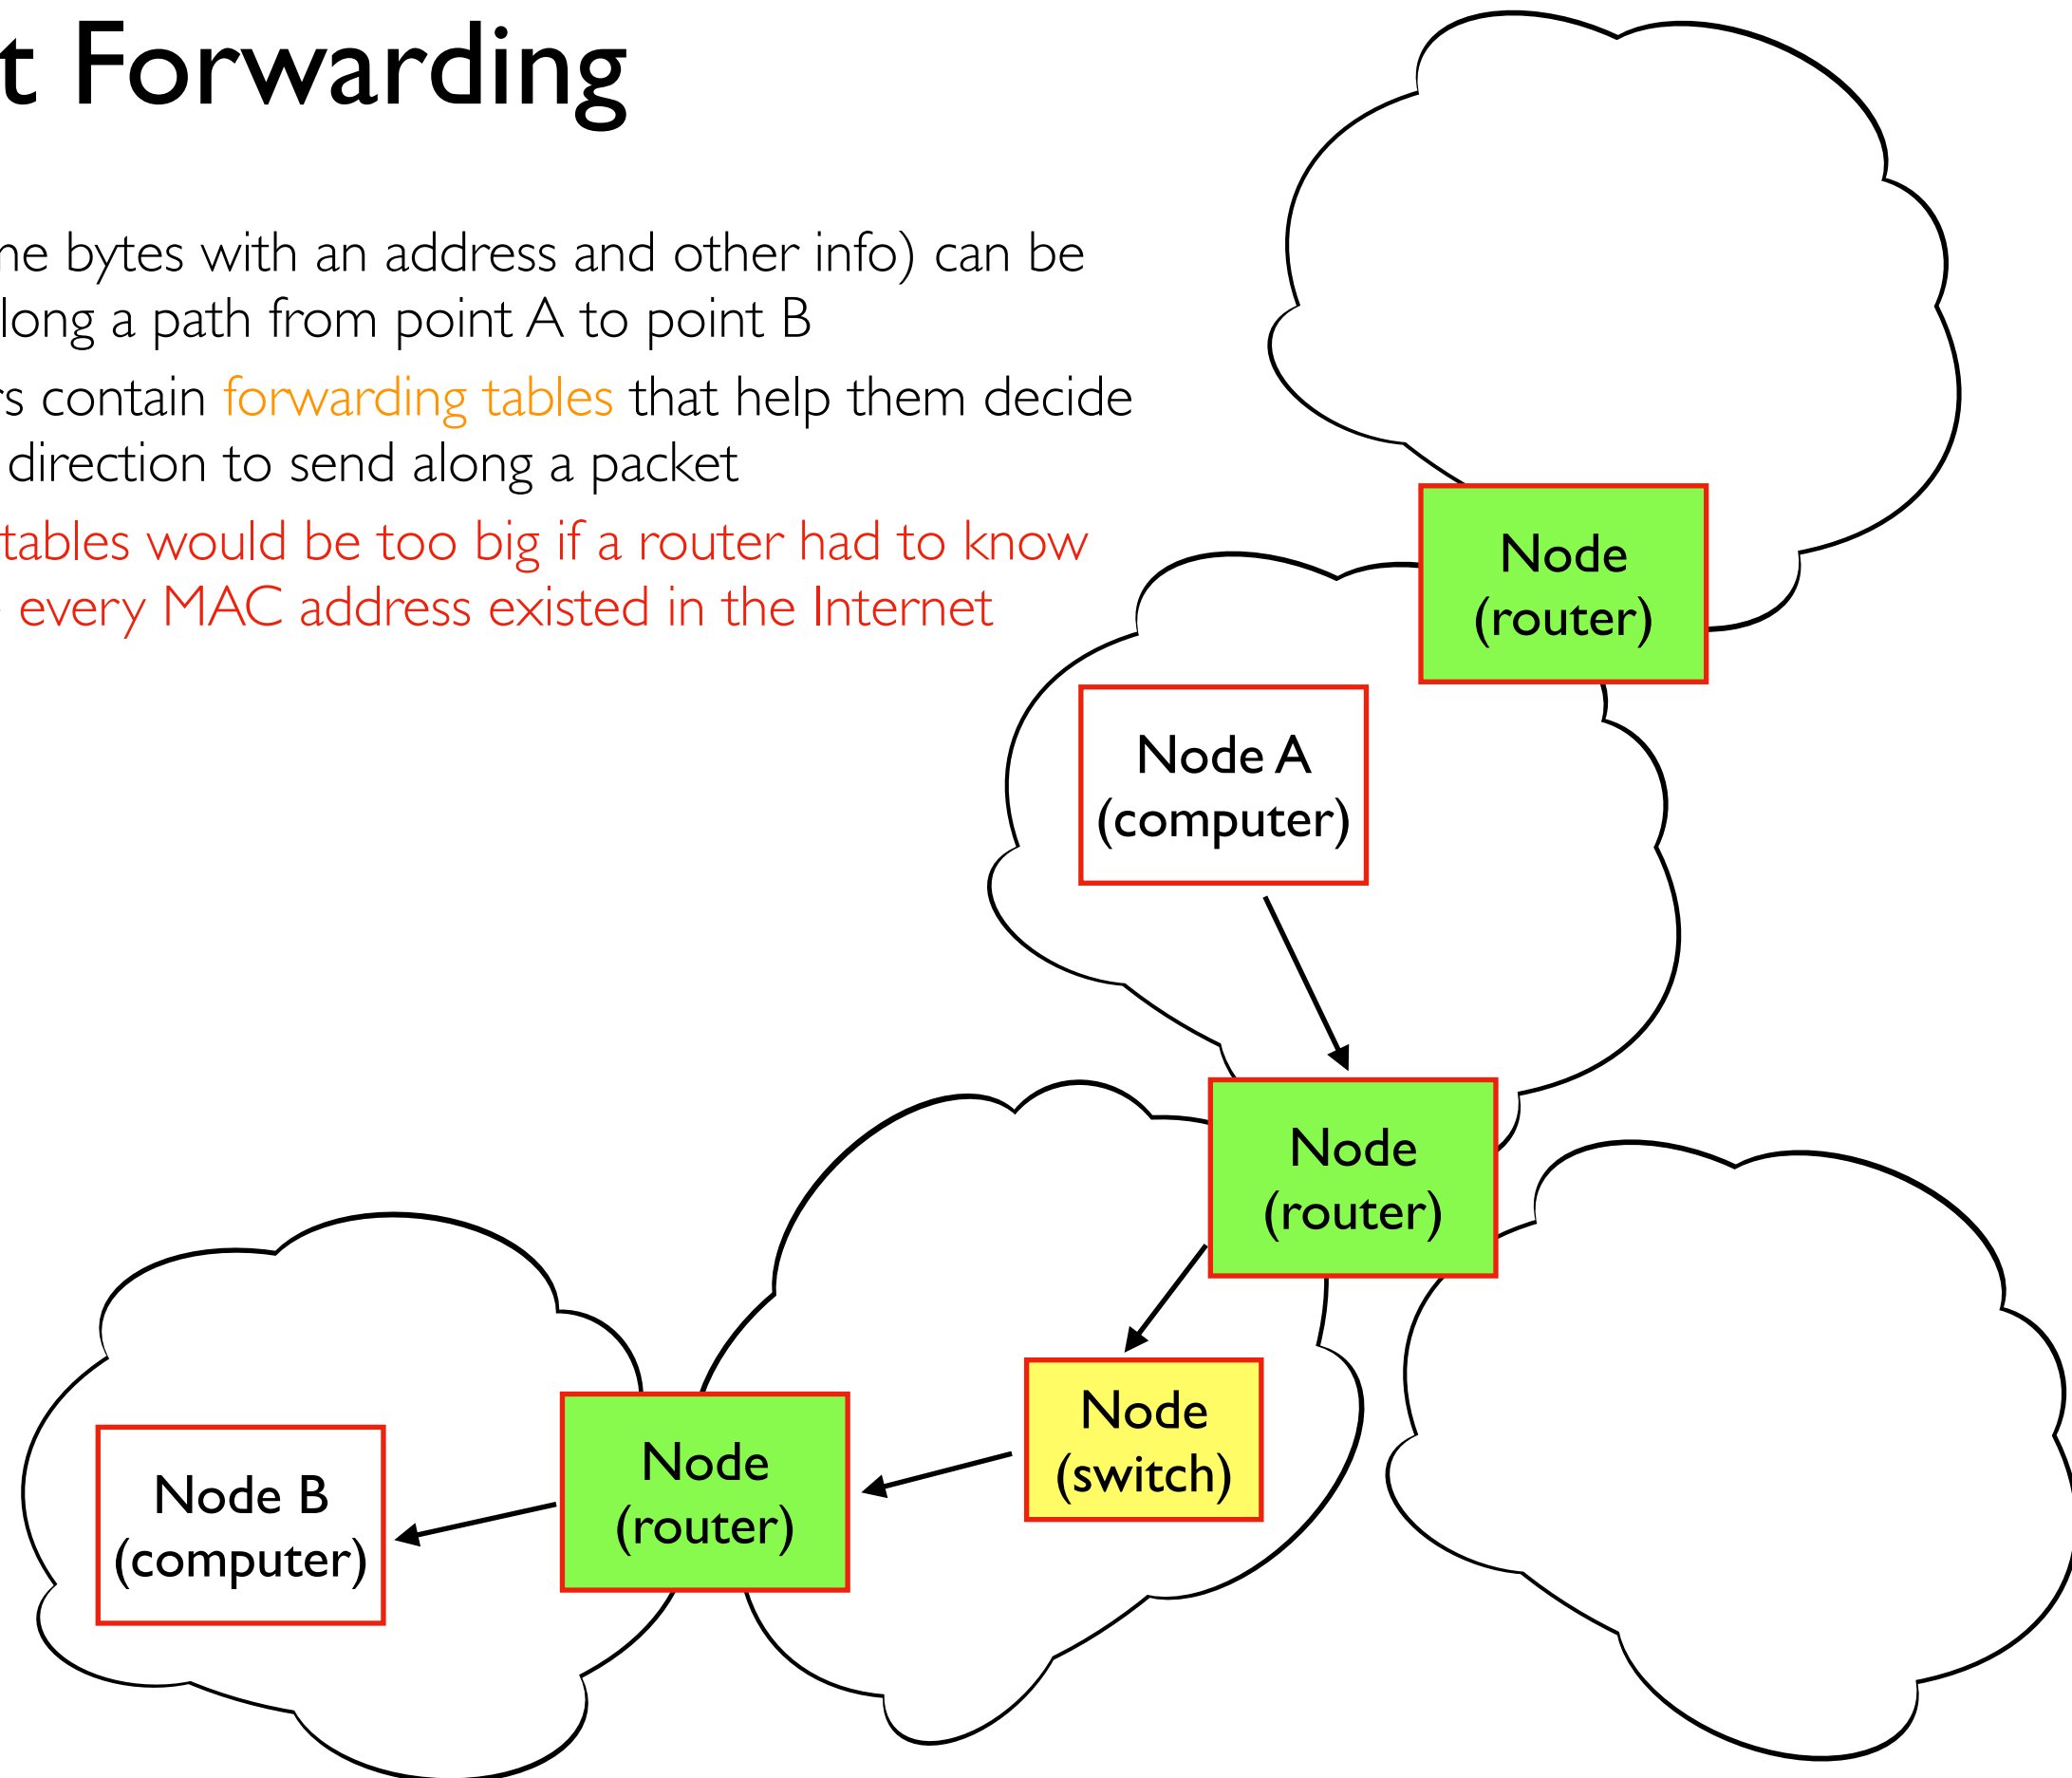

Internet Protocol

IP addresses are used to send packets across an internet

- example: 34 . 29 . 237 . 29 (domains can map to IP addrs)
- there are about 4 billion possible IP addresses (IPv4)
- IPv6 (less used) are 4x longer
- forwarding tables only need to know which way to send for a given network number

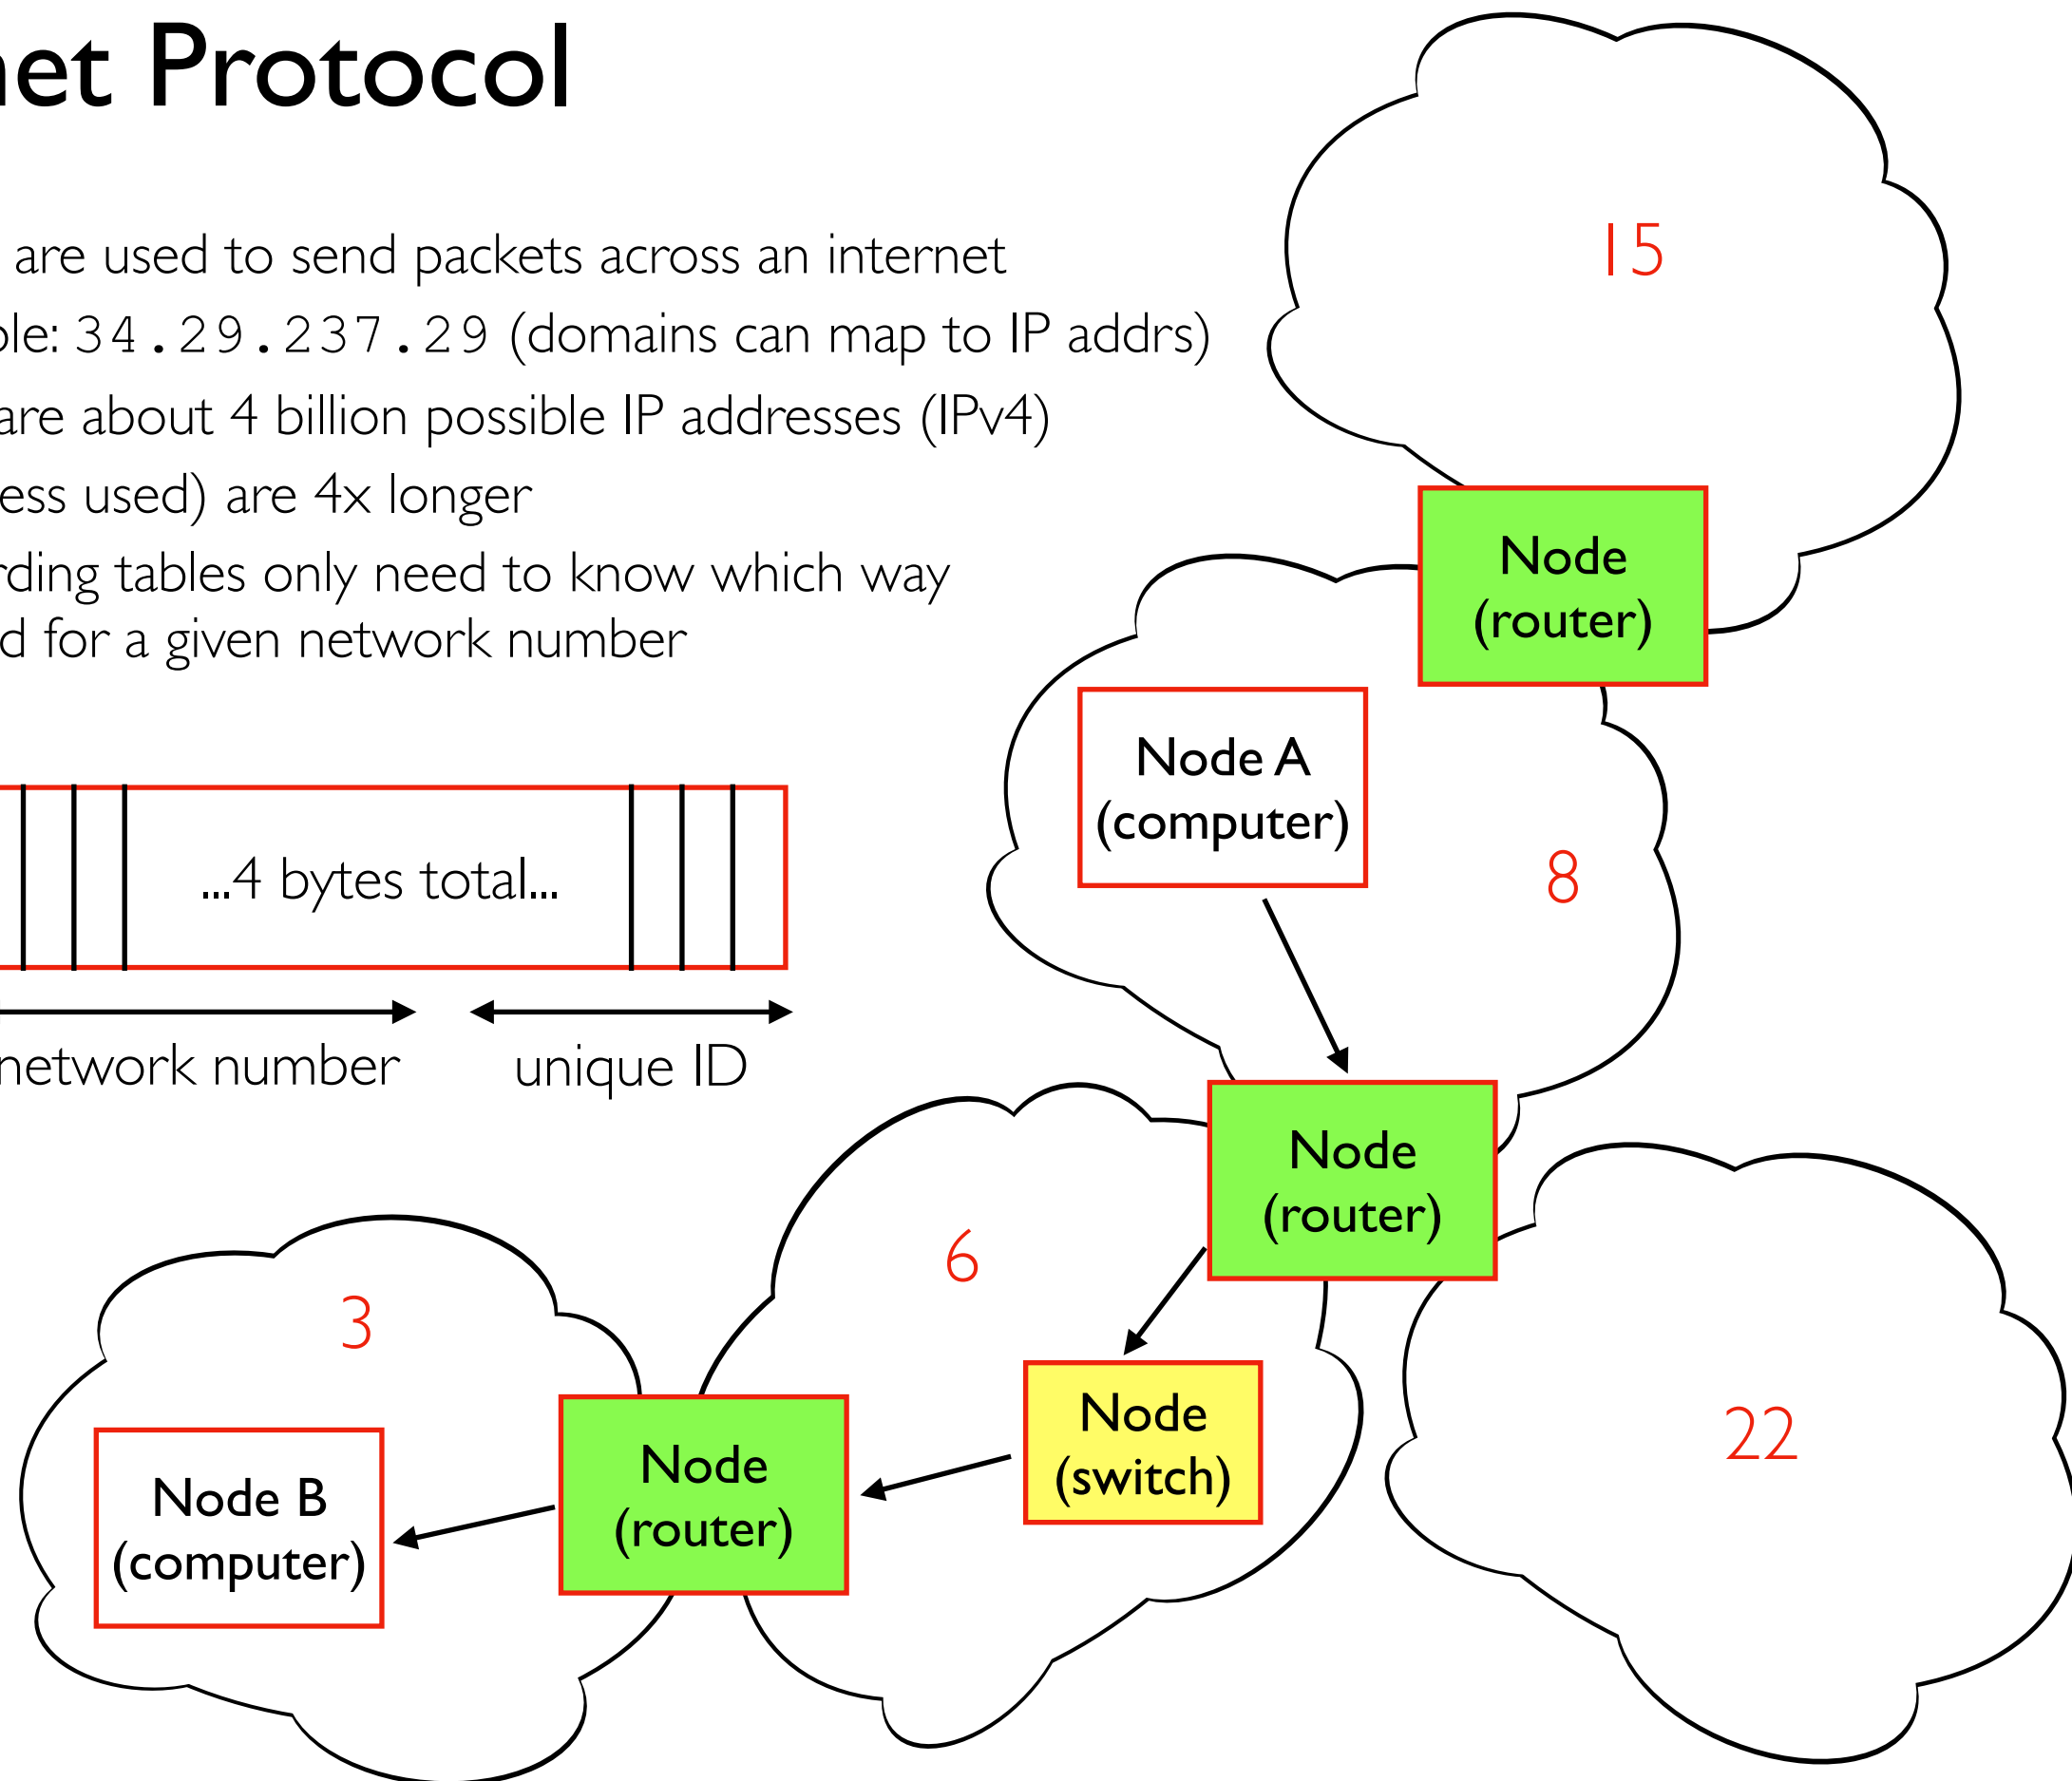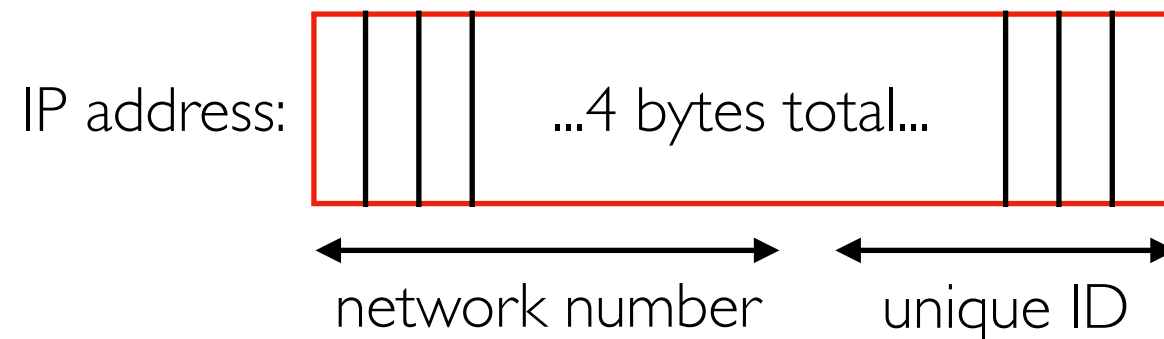

Listening on an Interface

```
trh@instance-2:~$ ifconfig
ens4: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
    inet 10.0.1.2 netmask 255.255.255.255 broadcast 0.0.0.0
    inet6 fe80::214:0000:0000:0000%ens4<link>
    ether 42:00:00:00:00:00
    ...

ens5: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1430
    inet 10.0.3.2 netmask 255.255.255.255 broadcast 10.0.3.2
    inet6 fe80::214:0000:0000:0000%ens5<link>
    ether 42:00:00:00:00:00
    ...

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1
    loop txqueuelen 1000 (Ethernet)
    ...
```

all of them: `python3 -m http.server --bind 0.0.0.0`

Private Networks

Challenges


- we don't have enough IPv4 addresses
- we don't want every machine to be able to receive packets from anywhere

Private ranges:

- 192.168.0.0 to 192.168.255.255
- 172.16.0.0 to 172.31.255.255
- 10.0.0.0 to 10.255.255.255

these can be divided into "sub networks"
(subnets) to create different networks in
a bigger org

Private networks allow duplicates and unreachable machines

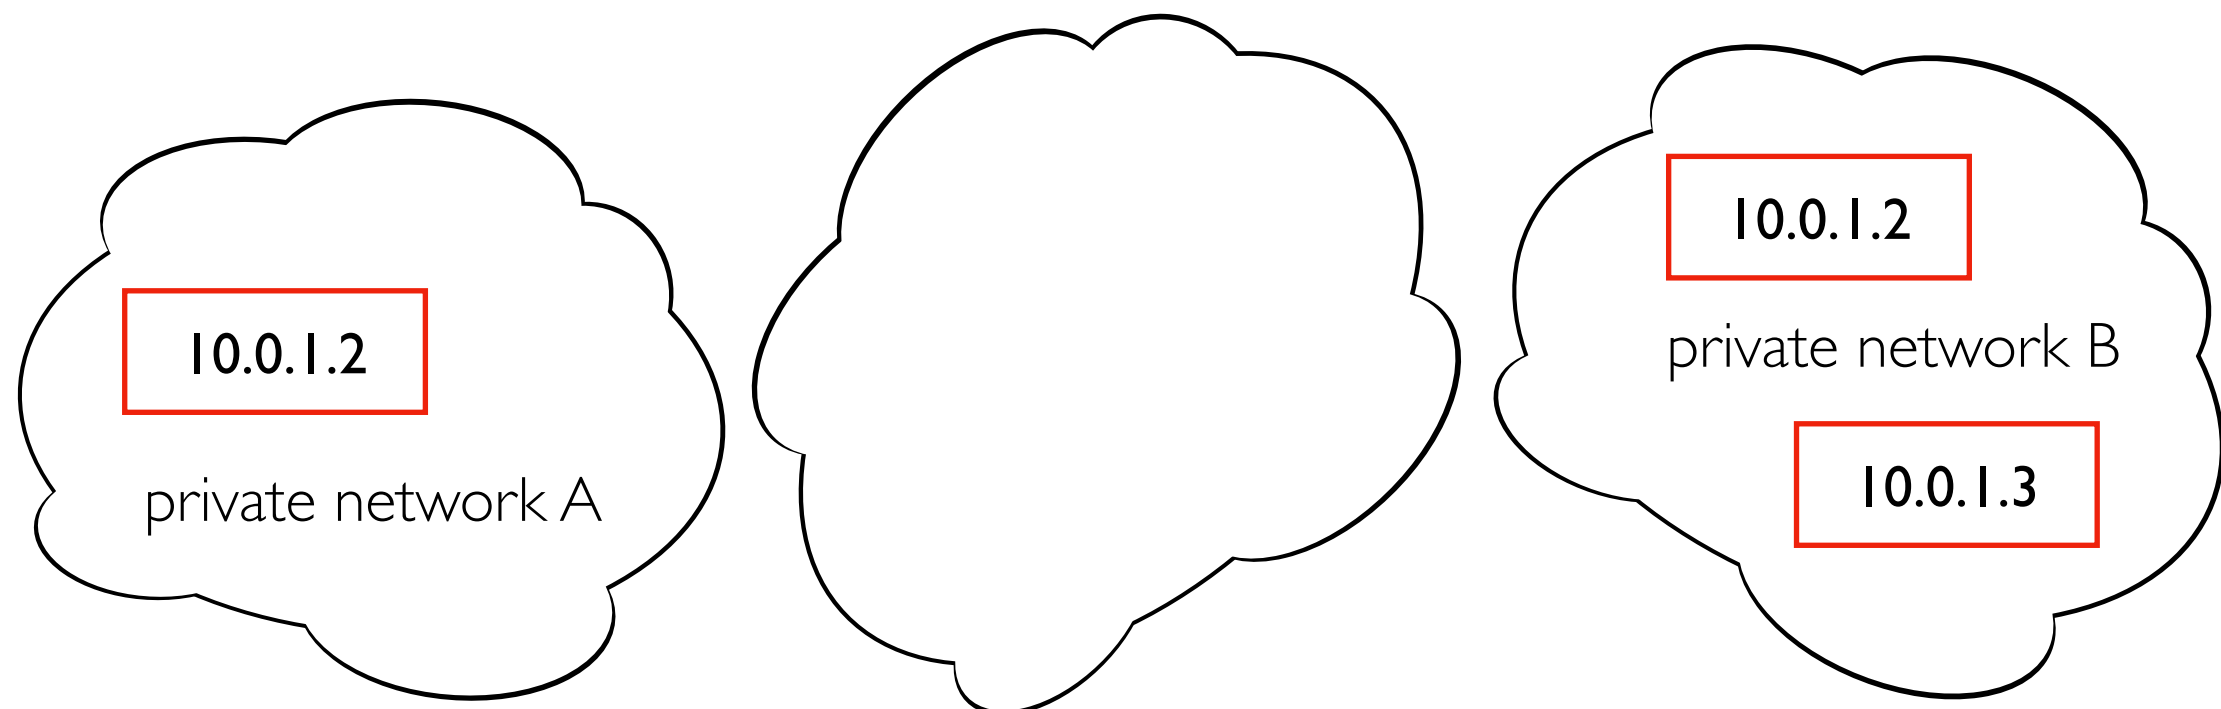

Private Networks


```
trh@instance-2:~$ ifconfig
ens4: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
    inet 10.0.1.2 python3 -m http.server --bind 10.0.1.2
    inet6 fe80::40
    ether 42:01:0a:00:01:02 txqueuelen 1000 (Ethernet)
    ...
```

Private ranges:

- 192.168.0.0 to 192.168.255.255
- 172.16.0.0 to 172.31.255.255
- 10.0.0.0 to 10.255.255.255

http://10.0.1.2:....
won't work in web browser!


Private networks allow duplicates and unreachable machines

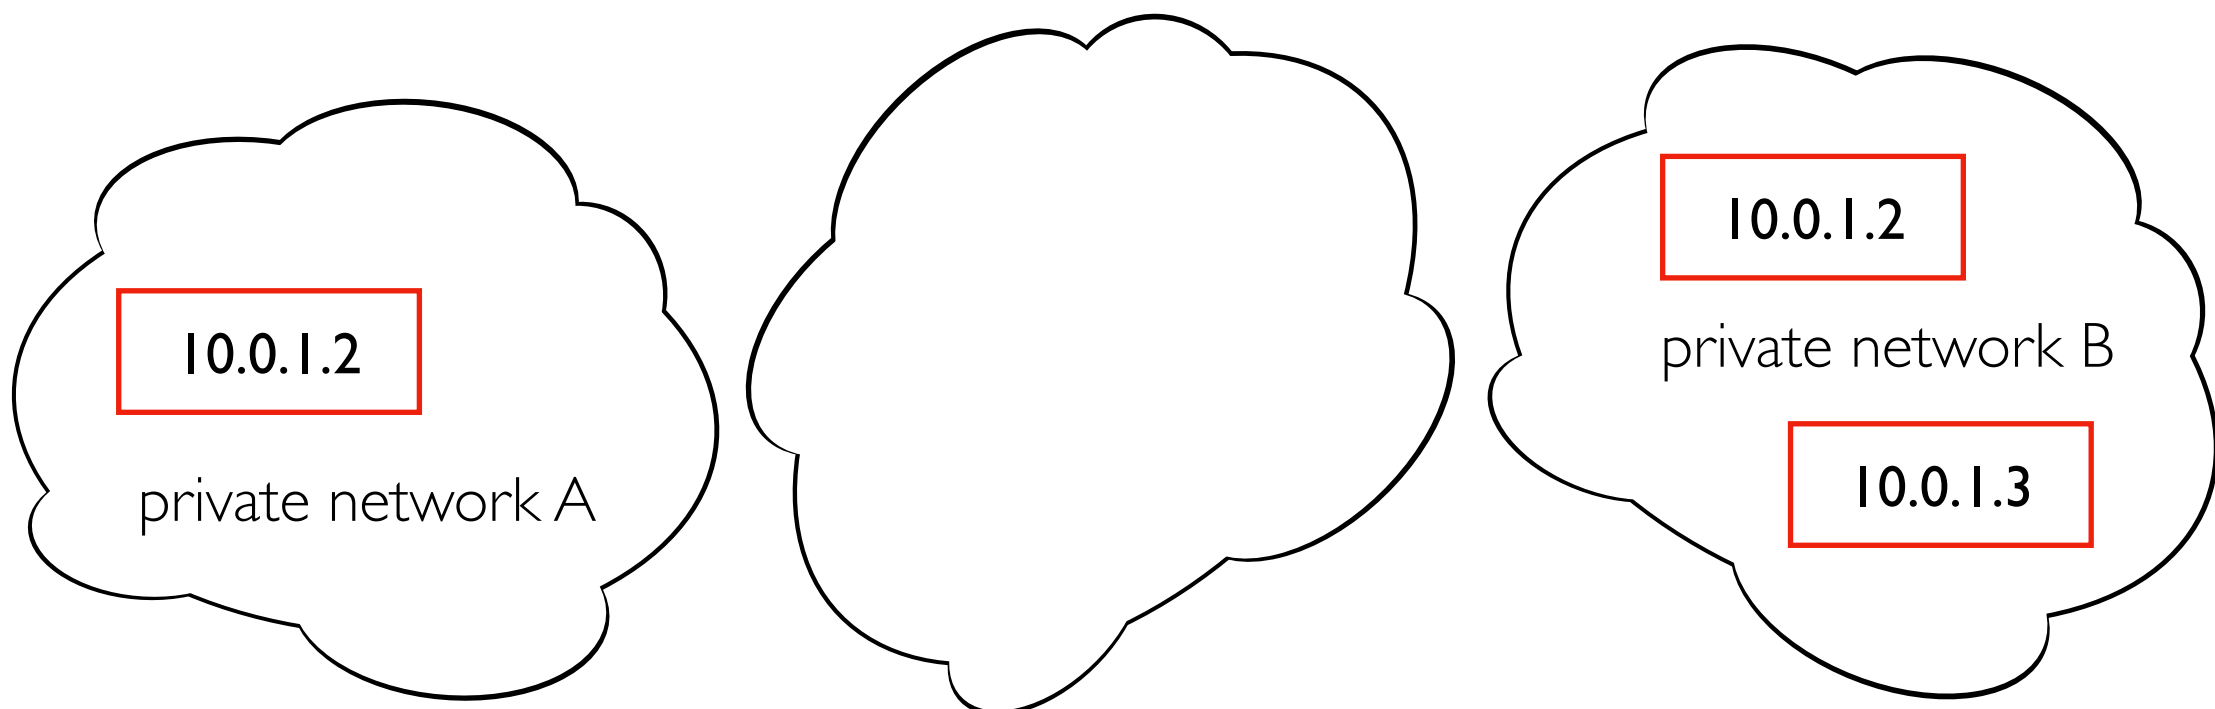

Network Address Translation

Google Console (view NAT config)

<input type="checkbox"/>	Status	Name ↑	Internal IP	External IP
<input type="checkbox"/>	✓	instance-1	10.128.0.36 (nic0)	34.29.237.29 (nic0)
<input type="checkbox"/>	✓	instance-2	10.0.1.2 (nic0) 10.0.3.2 (nic1)	35.202.74.234 (nic0) 34.29.220.248 (nic1)

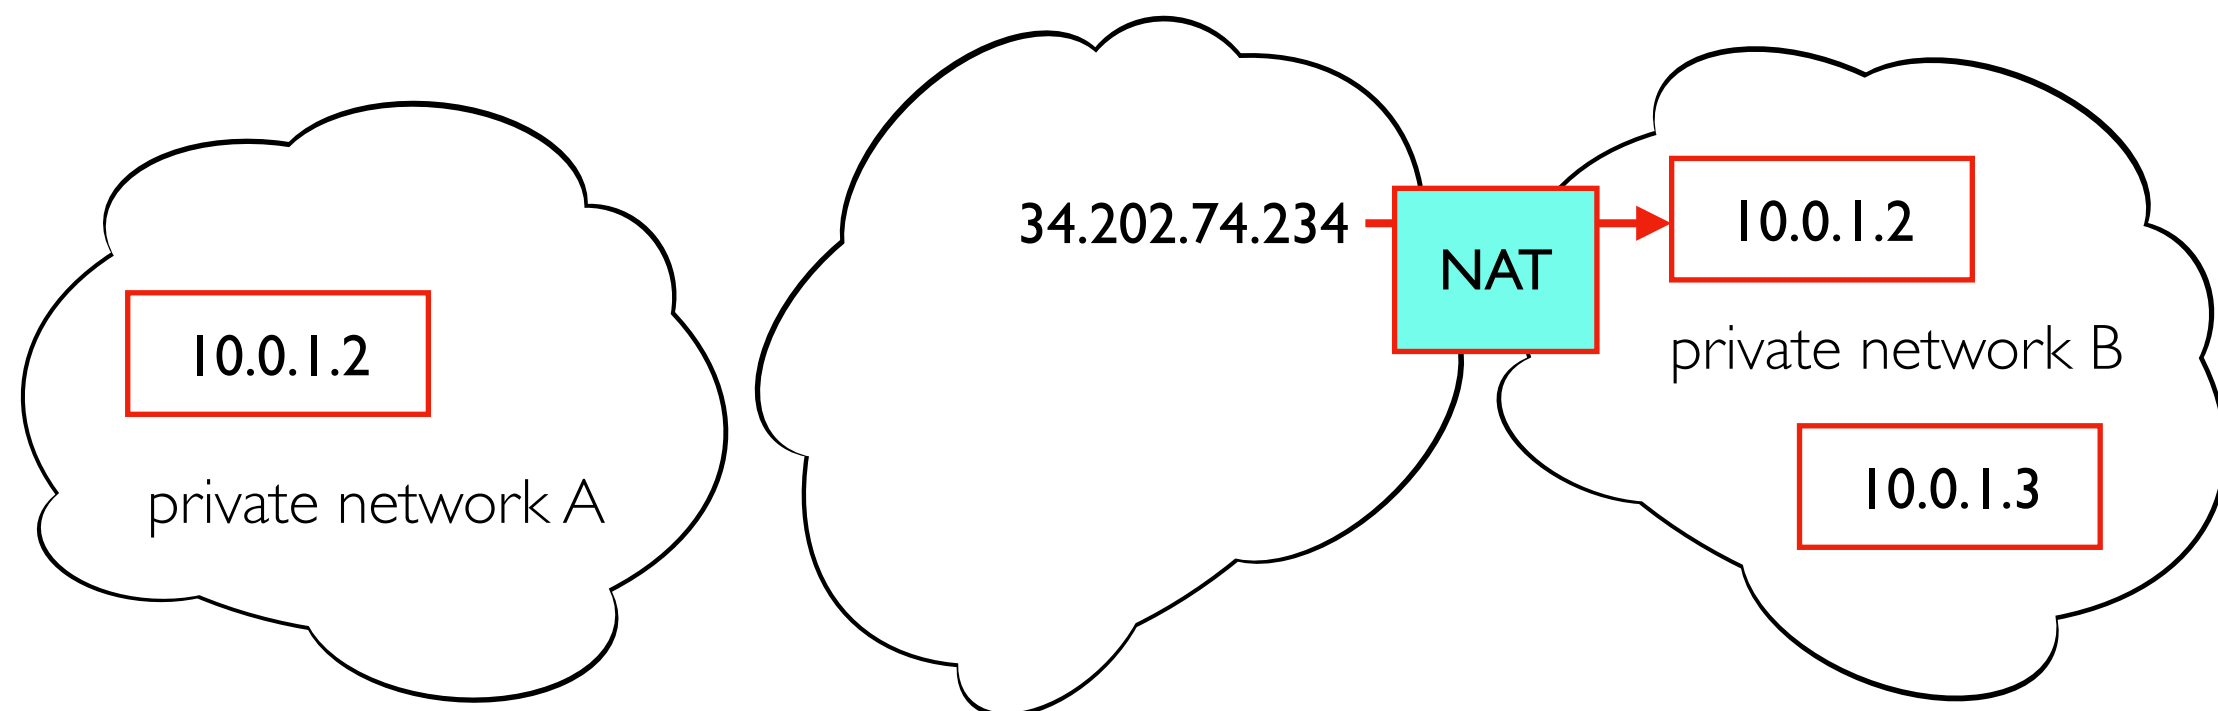


Network Address Translation

Google Console (view NAT config)

<input type="checkbox"/>	Status	Name ↑	Internal IP	External IP
<input type="checkbox"/>	✓	instance-1	10.128.0.36 (nic0)	34.29.237.29 (nic0)
<input type="checkbox"/>	✓	instance-2	10.0.1.2 (nic0) 10.0.3.2 (nic1)	35.202.74.234 (nic0) 34.29.220.248 (nic1)

By default, the external IPs are "ephemeral" (change upon reboot). You can rent "static" IPs that don't change.

Browser

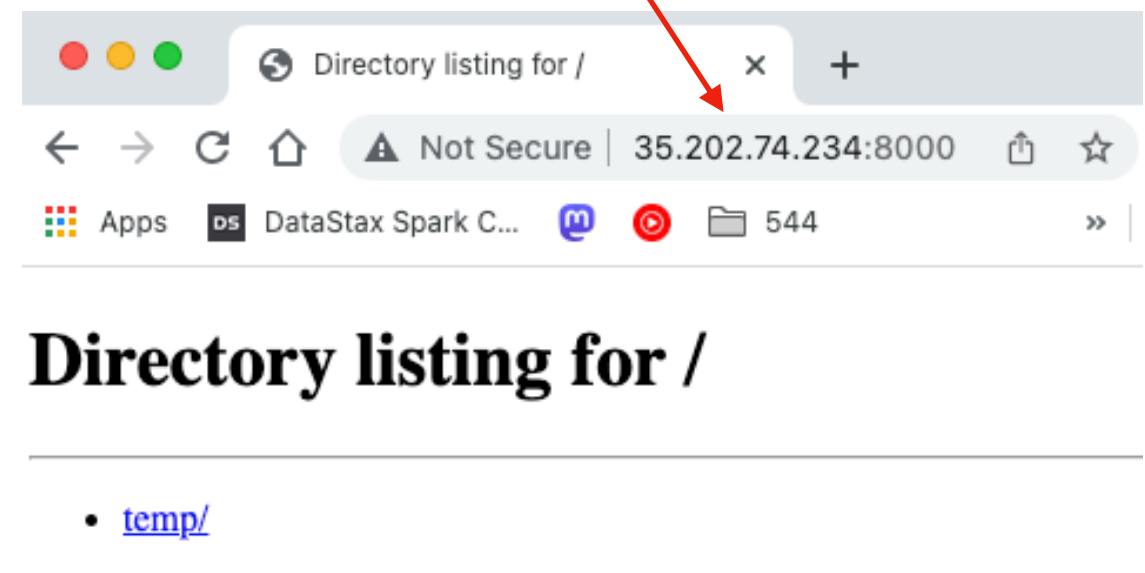

Server

```
trh@instance-2:~/temp$ python3 -m http.server --bind 10.0.1.2
Serving HTTP on 10.0.1.2 port 8000 (http://10.0.1.2:8000/) ...
72.33.0.184 - - [10/Feb/2023 21:12:53] "GET / HTTP/1.1" 200 -
...
```

Outline

Networks

Internets and "The Internet"

Transport Protocols


Port Numbers

Computers might be running multiple processes using the network

- IP address => which NIC?
- Port number => which process?

```
trh@instance-2:~$ python3 -m http.server --directory=A --bind 10.0.1.2 8000 &  
[1] 13502  
Serving HTTP on 10.0.1.2 port 8000 (http://10.0.1.2:8000/) ...
```

```
trh@instance-2:~$ python3 -m http.server --directory=B --bind 10.0.1.2 9000 &  
[2] 13503  
Serving HTTP on 10.0.1.2 port 9000 (http://10.0.1.2:9000/) ...
```

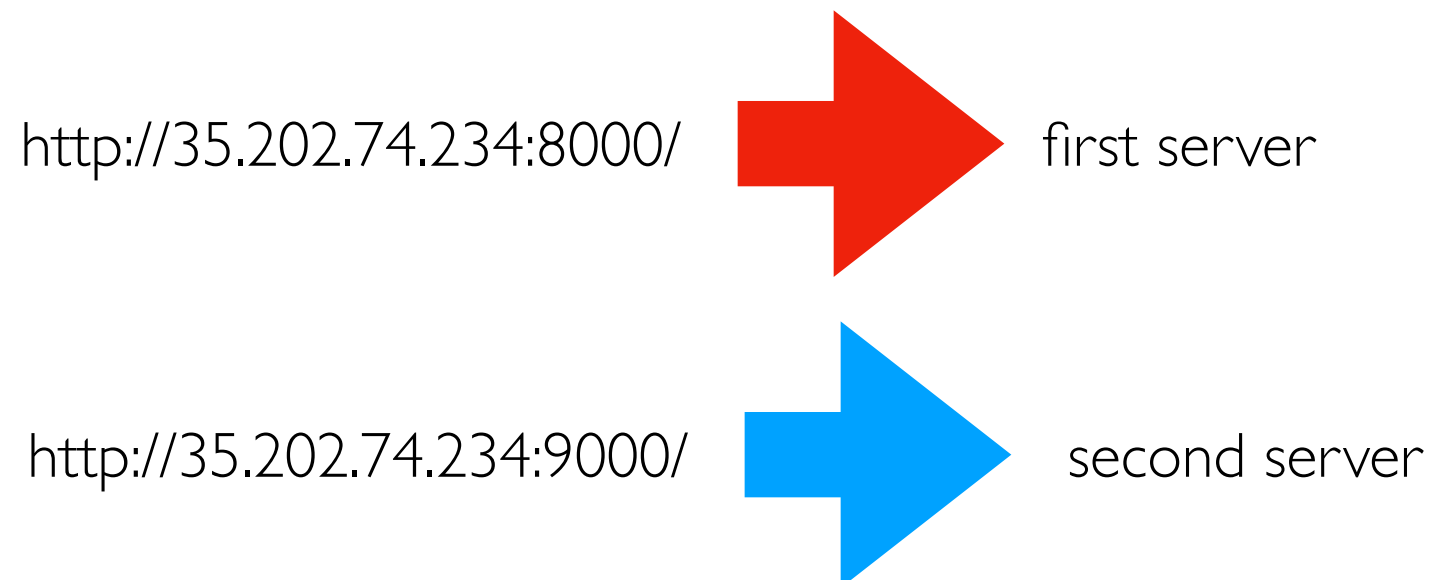

TopHat

42:01:0a:80:00:25 is an example of what?

Transport Protocols

Most common

- **UDP** (User Datagram Protocol)
- **TCP** (Transmission Control Protocol)

BOTH build on IP networking and BOTH provide **port numbers**

```
trh@instance-2:~/temp$ sudo lsof -i tcp -P
```

```
COMMAND      PID  NODE  NAME
```

```
...
```

```
sshd          863  TCP  *:22 (LISTEN)
```

```
sshd          863  TCP  *:22 (LISTEN)
```

```
...
```

```
python3      13607 TCP  instance-2...internal:8000 (LISTEN)
```

```
python3      13608 TCP  instance-2...internal:9000 (LISTEN)
```

Reliability: UDP vs. TCP


Packets may be

- dropped
- reordered
- split

TCP saves+reassembles **packets** in order to provide original **message** (when possible).
For packet drops, it retries. We'll mostly use TCP.

UDP doesn't do this extra work. Why ever use UDP?

Network Stack: Common Implementations

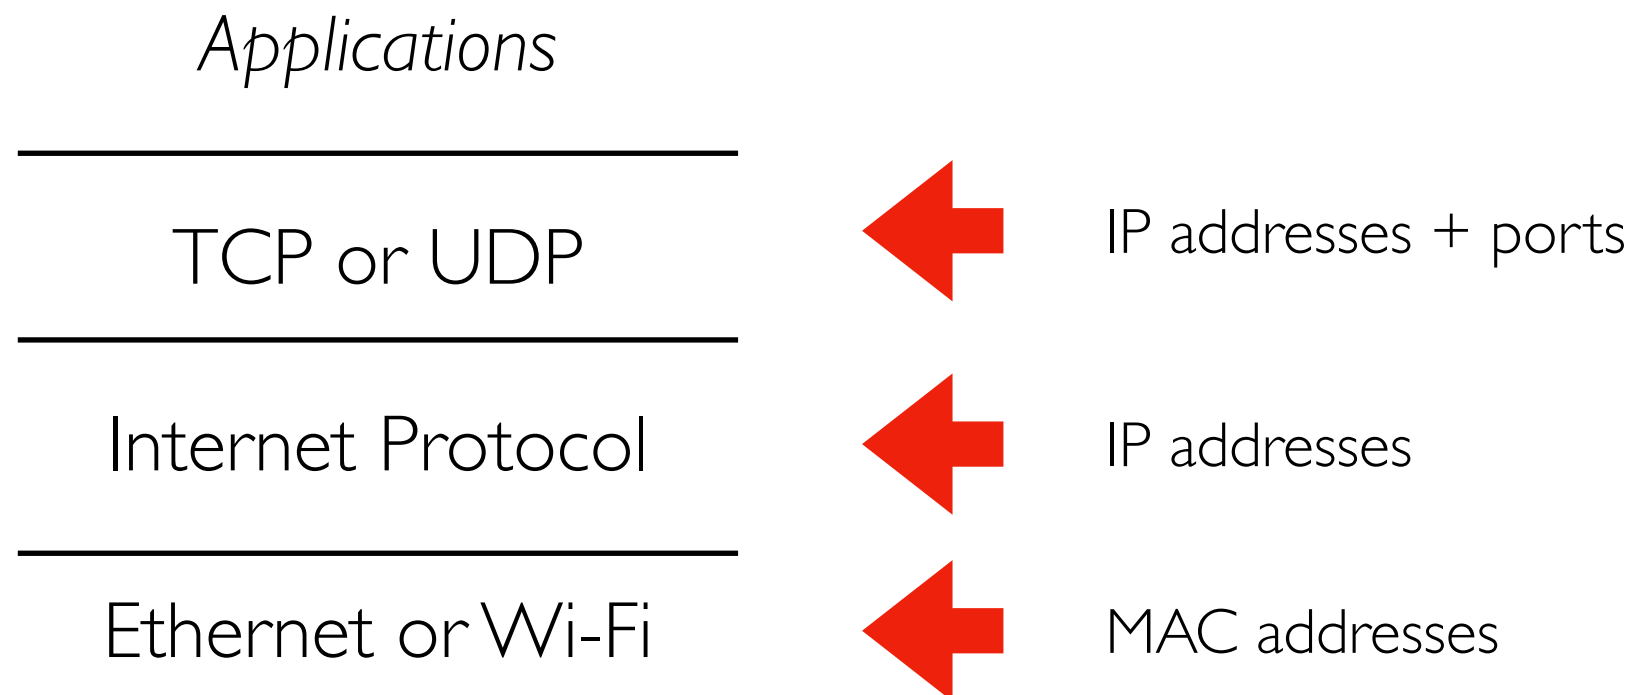

Network applications (like most complex systems) are not built as one single system. Layers are built upon other layers to provide additional functionality.