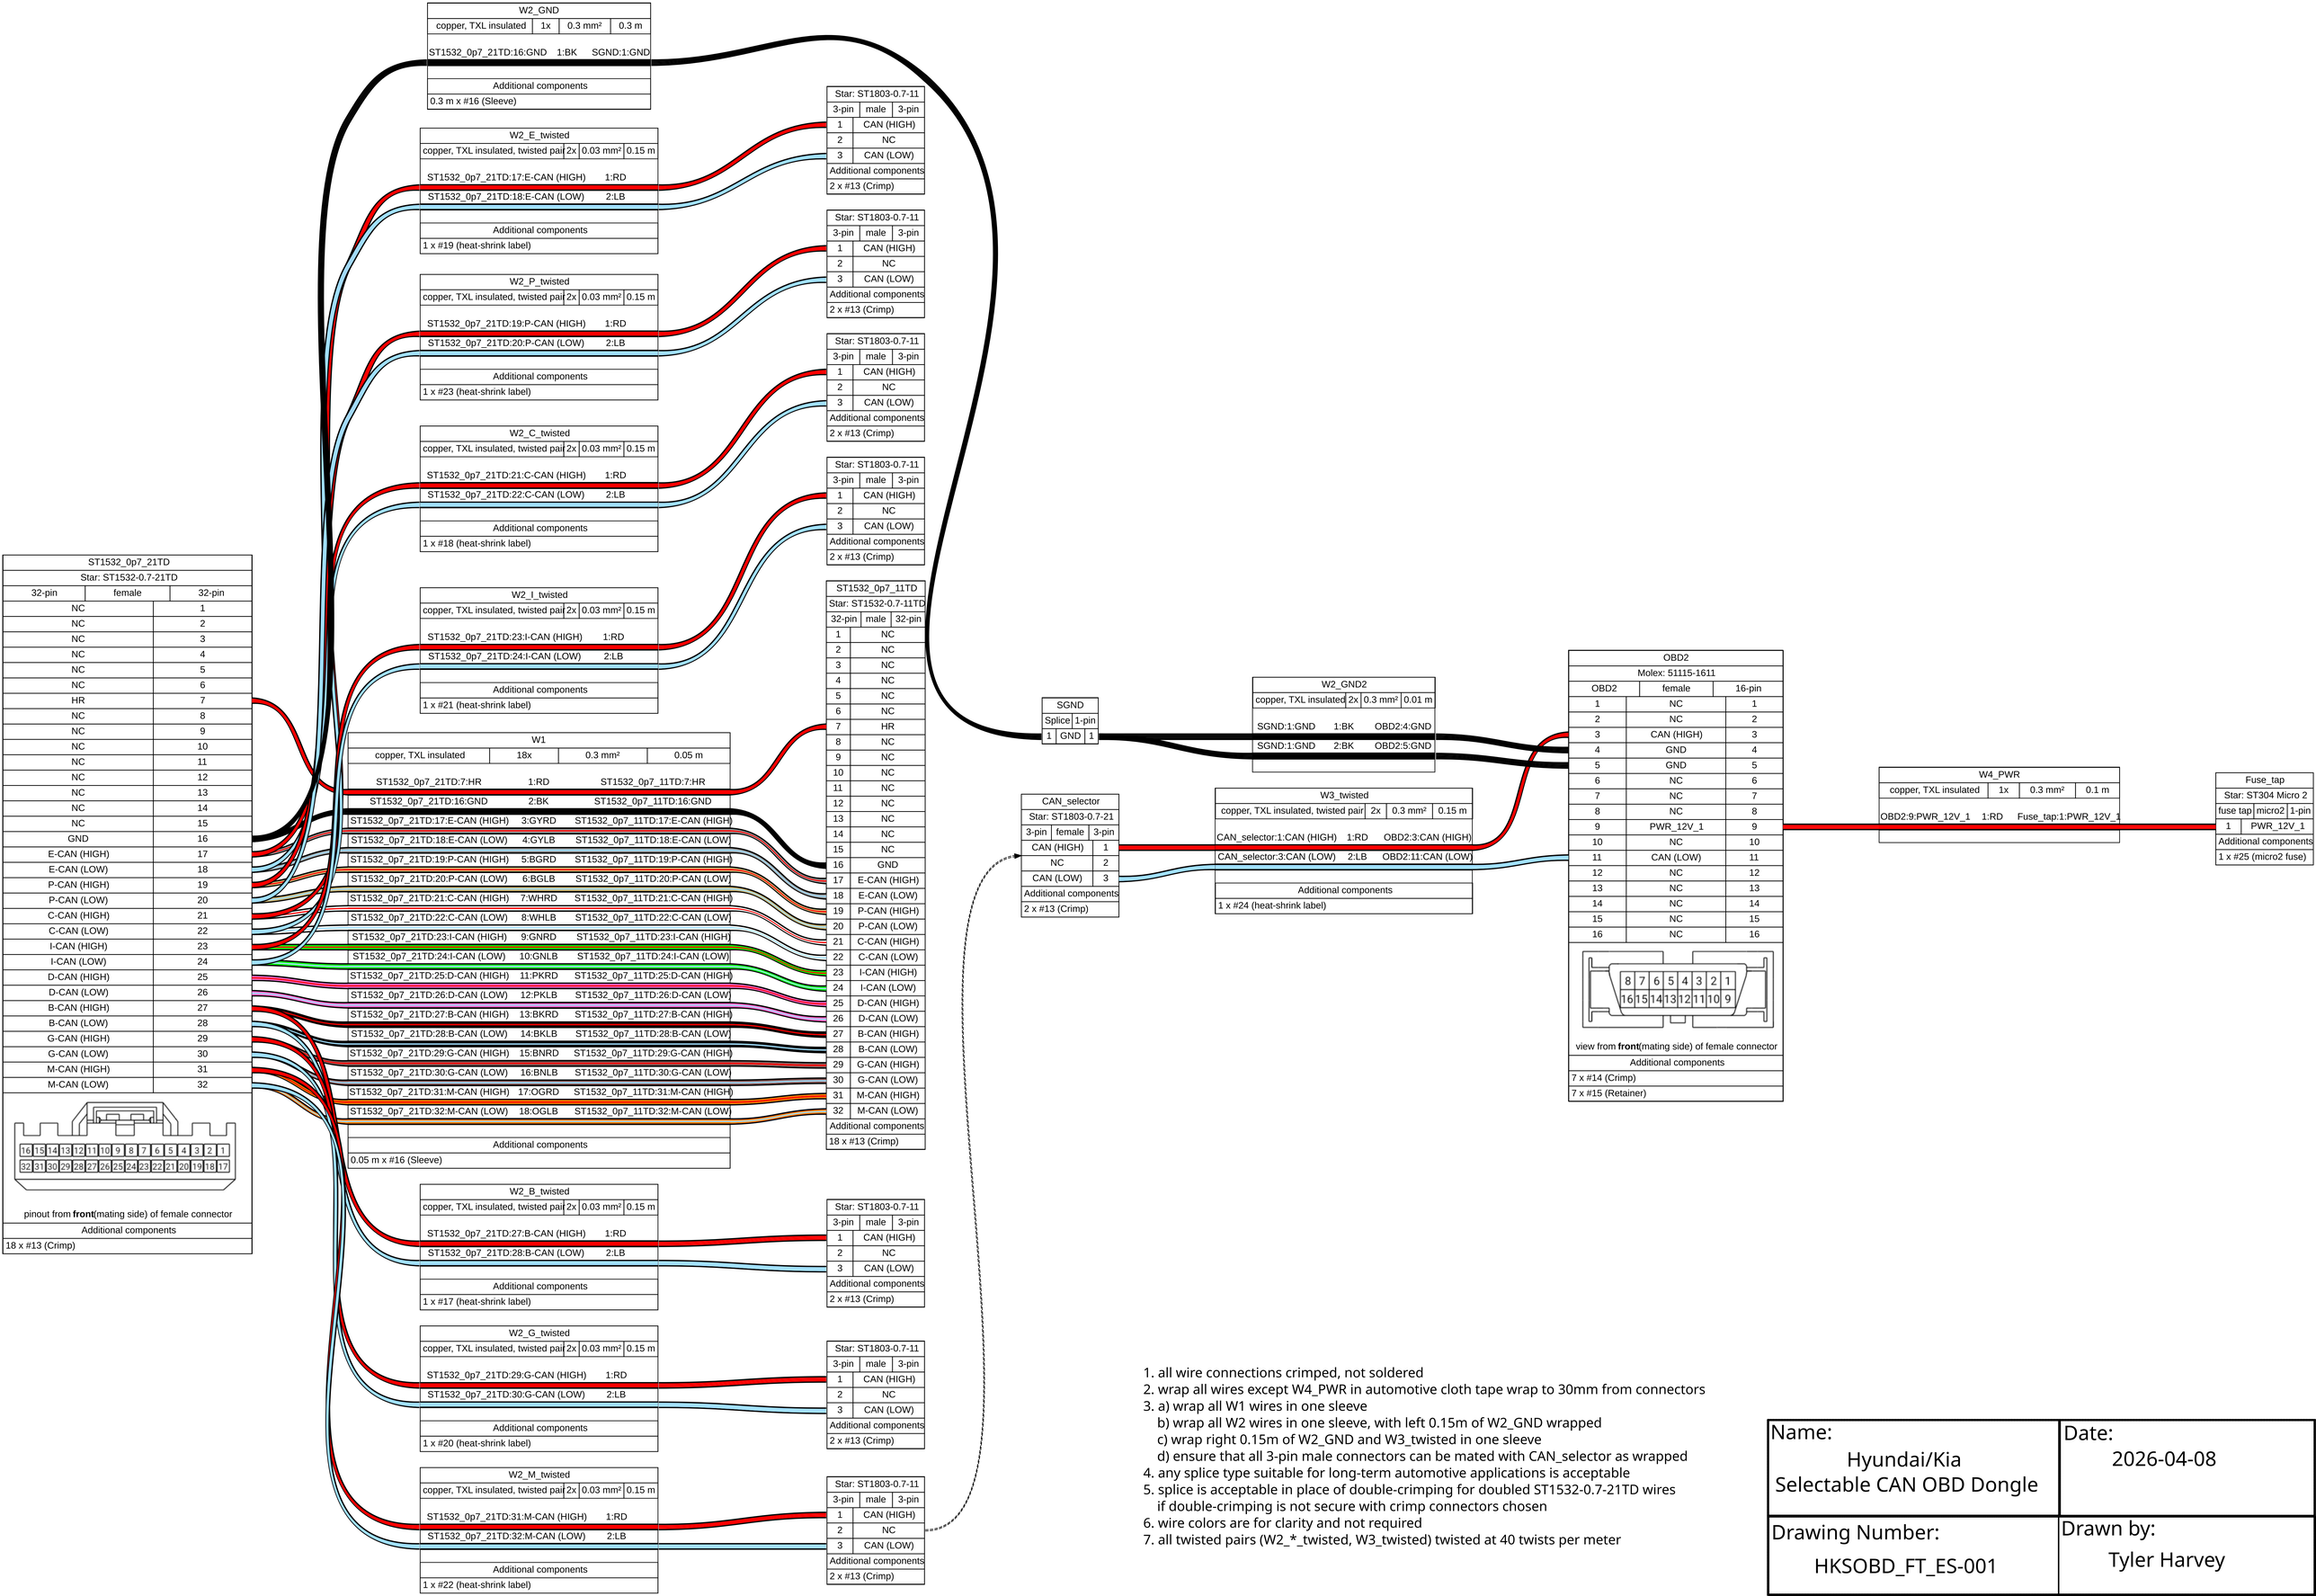

1. all wire connections crimped, not soldered
2. wrap all wires except W4_PWR in automotive cloth tape wrap to 30mm from connectors
3. a) wrap all W1 wires in one sleeve
   b) wrap all W2 wires in one sleeve, with left 0.15m of W2_GND wrapped
   c) wrap right 0.15m of W2_GND and W3_twisted in one sleeve
   d) ensure that all 3-pin male connectors can be mated with CAN_selector as wrapped
4. any splice type suitable for long-term automotive applications is acceptable
5. splice is acceptable in place of double-crimping for doubled ST1532-0.7-21TD wires
   if double-crimping is not secure with crimp connectors chosen
6. wire colors are for clarity and not required
7. all twisted pairs (W2_*_twisted, W3_twisted) twisted at 40 twists per meter

Name: Hyundai/Kia Selectable CAN OBD Dongle	Date: 2026-04-08
Drawing Number: HKSOBD_FT_ES-001	Drawn by: Tyler Harvey