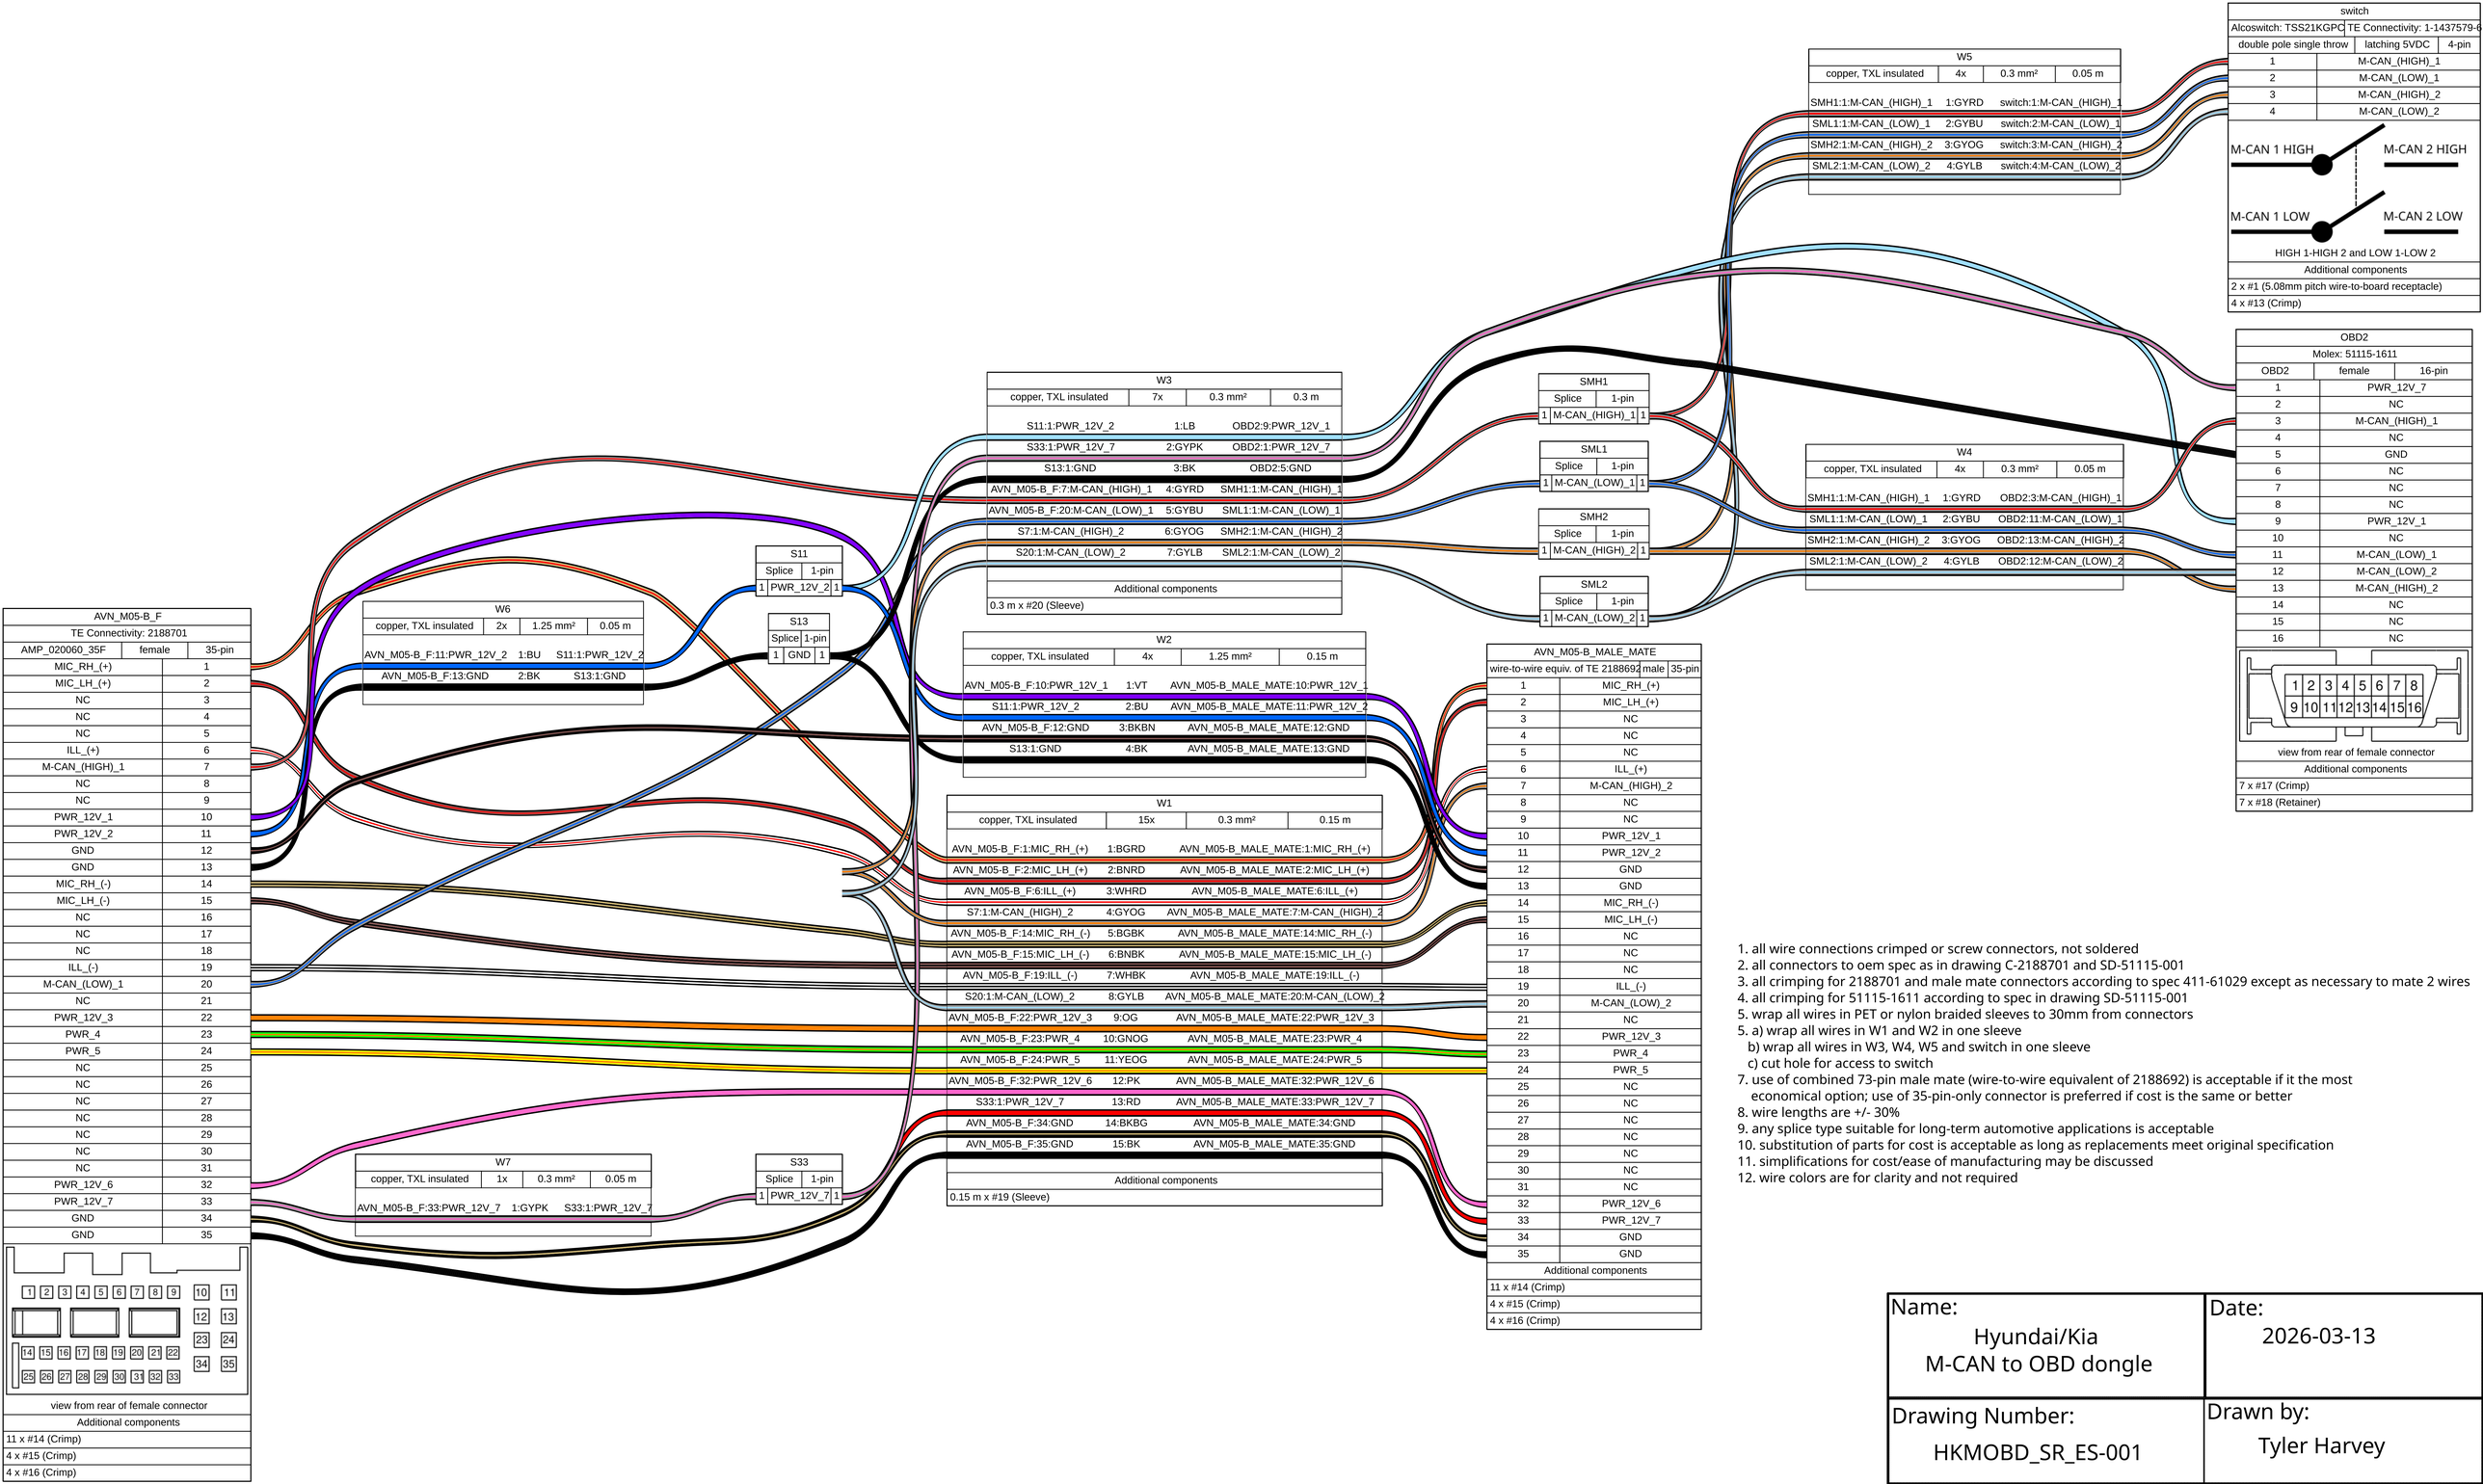

1. all wire connections crimped or screw connectors, not soldered
2. all connectors to oem spec as in drawing C-2188701 and SD-51115-001
3. all crimping for 2188701 and male mate connectors according to spec 411-61029 except as necessary to mate 2 wires
4. all crimping for 51115-1611 according to spec in drawing SD-51115-001
5. wrap all wires in PET or nylon braided sleeves to 30mm from connectors
5. a) wrap all wires in W1 and W2 in one sleeve
   b) wrap all wires in W3, W4, W5 and switch in one sleeve
   c) cut hole for access to switch
7. use of combined 73-pin male mate (wire-to-wire equivalent of 2188692) is acceptable if it the most economical option; use of 35-pin-only connector is preferred if cost is the same or better
8. wire lengths are +/- 30%
9. any splice type suitable for long-term automotive applications is acceptable
10. substitution of parts for cost is acceptable as long as replacements meet original specification
11. simplifications for cost/ease of manufacturing may be discussed
12. wire colors are for clarity and not required

Name: Hyundai/Kia M-CAN to OBD dongle	Date: 2026-03-13
Drawing Number: HKMOBD_SR_ES-001	Drawn by: Tyler Harvey