


NOTES:

- 1. HEAT TREAT TO 38-42 HRC PER AMS 2759
- 2. MAGNETIC PARTICLE INSPECT PER ASTM E1444
- 3. BEARING JOURNAL CONCENTRICITY: 0.001 TIR
- 4. KEYWAY PER ANSI B17.1, 3/16 x 3/32
- 5. NADCAP APPROVED PROCESSES REQUIRED

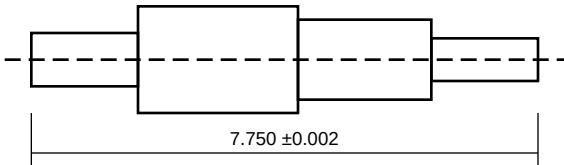

Meridian Precision Manufacturing

ISO 9001:2015 | AS9100D Certified

DRAWN BY: R. Patel

DATE: 2024-11-02

UNLESS OTHERWISE SPECIFIED:

TOLERANCES: ±0.003 UNLESS NOTED

SURFACE FINISH: 63 Ra ON BEARING SURFACES

APPROVED BY: J. Harrison

SCALE: 1:1

MATERIAL: 4340 ALLOY STEEL

DRIVE SHAFT ASSEMBLY

PN: 5219

REV: C

SHEET: 1 OF 1