


NOTES:

- 1. PASSIVATE PER ASTM A967 / AMS 2700
- 2. BORE DIAMETER: 1.2500 +0.0005/-0.0000
- 3. POSITION TOLERANCE ON MOUNTING HOLES: 0.002 DIA AT MMC
- 4. O-RING GROOVE PER AS568A, DASH 214
- 5. PRESSURE TEST TO 500 PSI, NO LEAKAGE PERMITTED
- 6. ITAR CONTROLLED - DISTRIBUTION STATEMENT D

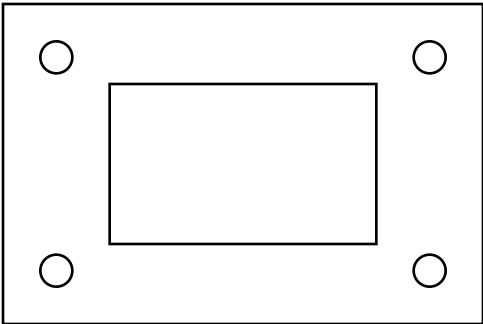

Meridian Precision Manufacturing

ISO 9001:2015 | AS9100D Certified

DRAWN BY: A. Kovacs

DATE: 2025-01-18

UNLESS OTHERWISE SPECIFIED:

TOLERANCES: ±0.005 UNLESS NOTED

SURFACE FINISH: 32 Ra ON SEALING SURFACES

APPROVED BY: J. Harrison

SCALE: 1:1

MATERIAL: 316 STAINLESS STEEL

SENSOR HOUSING

PN: 6103

REV: B

SHEET: 1 OF 1