


POWER: Eurorack 10-pin, reverse protection, decoupling

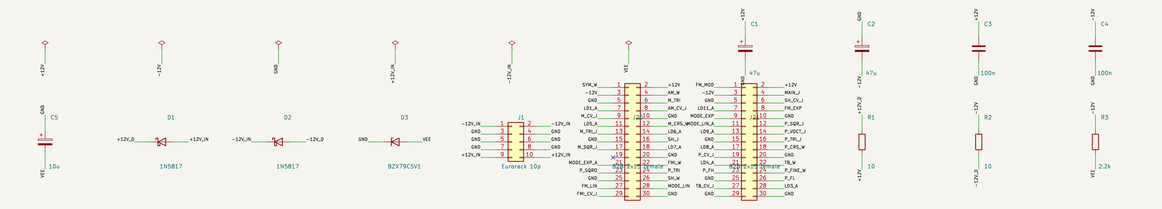


MODULATION OSCILLATOR (THAT320 expo + tempco, LM13700 core, LM319/CD4053 switching)

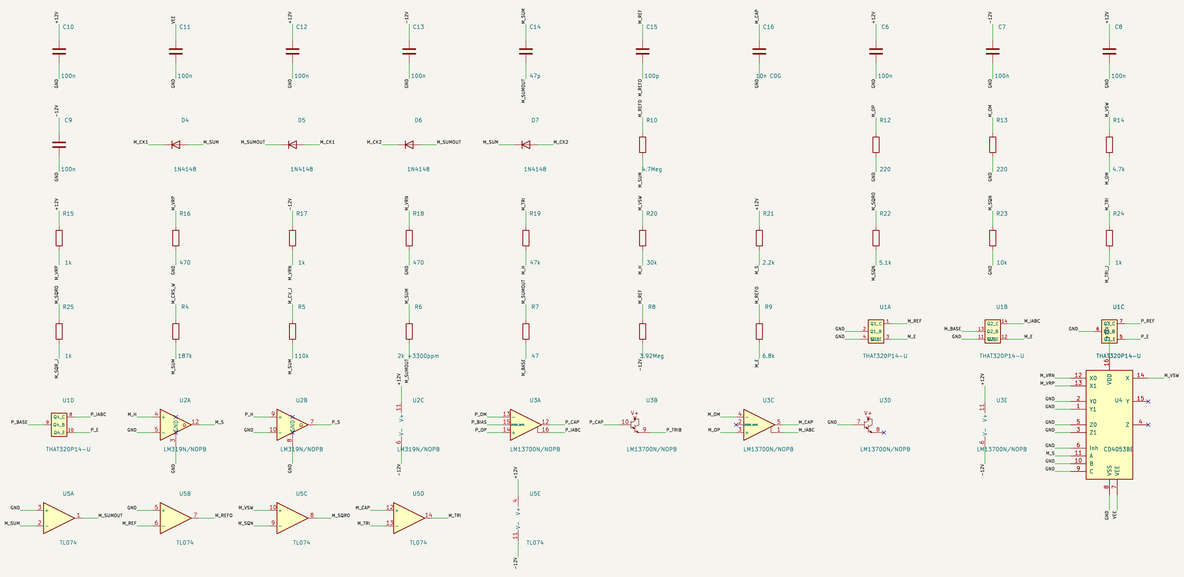


PRINCIPAL OSCILLATOR (1V/oct, HF comp, through-zero linear FM core)

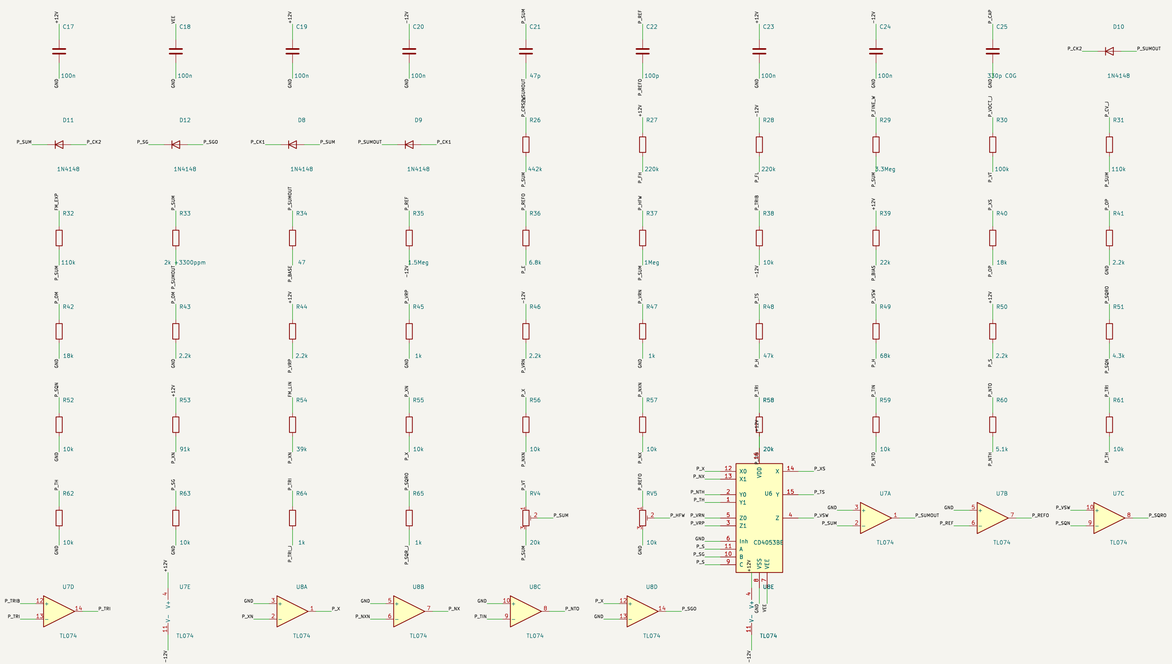


FM INDEX VCA + LIN/EXP

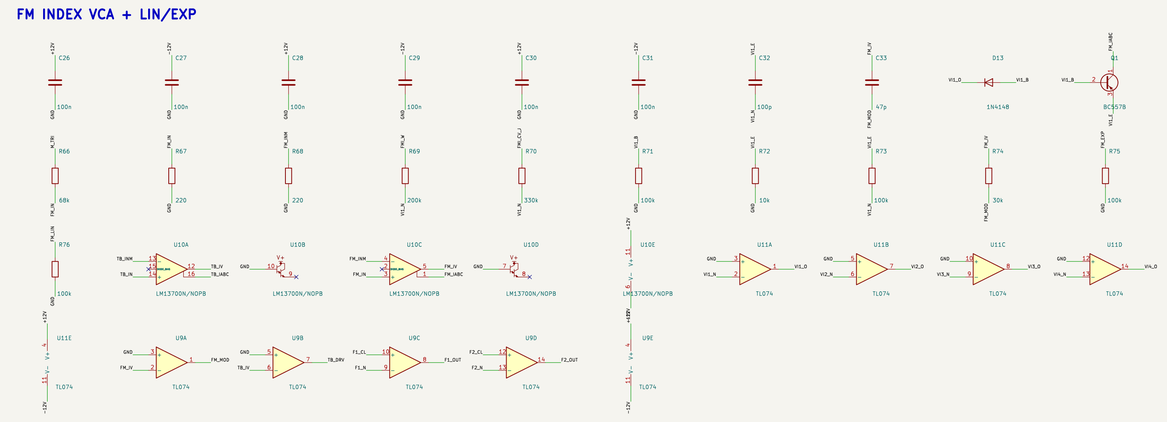


TIMBRE: VCA drive + symmetry + 2-stage diode wavefolder

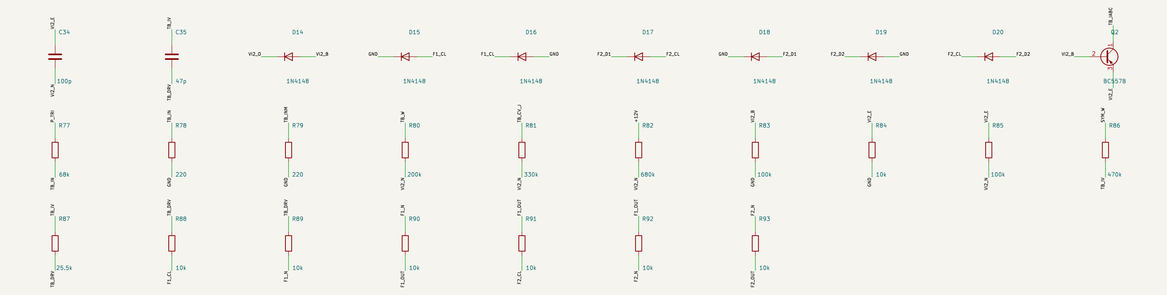

AM VCA (+AM CV), SHAPE morph (+SHAPE CV OTA), outputs

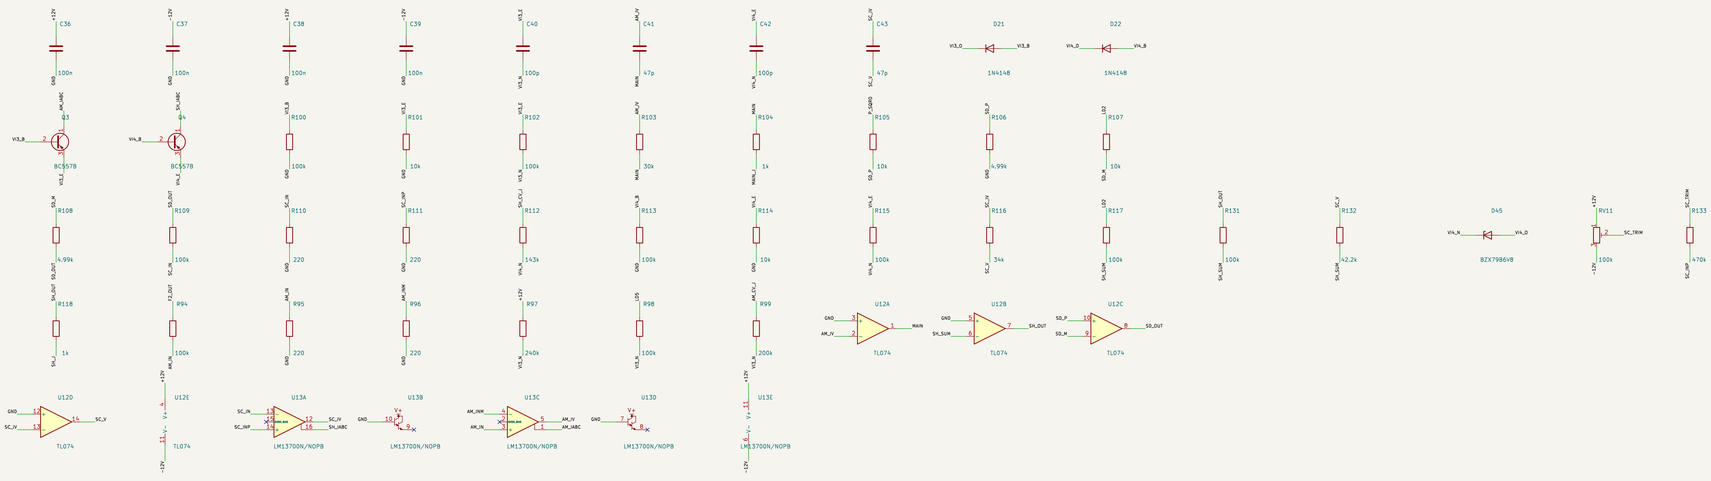

LED DRIVERS: TL074 followers, 2.2k limit, 1N4148 reverse clamp

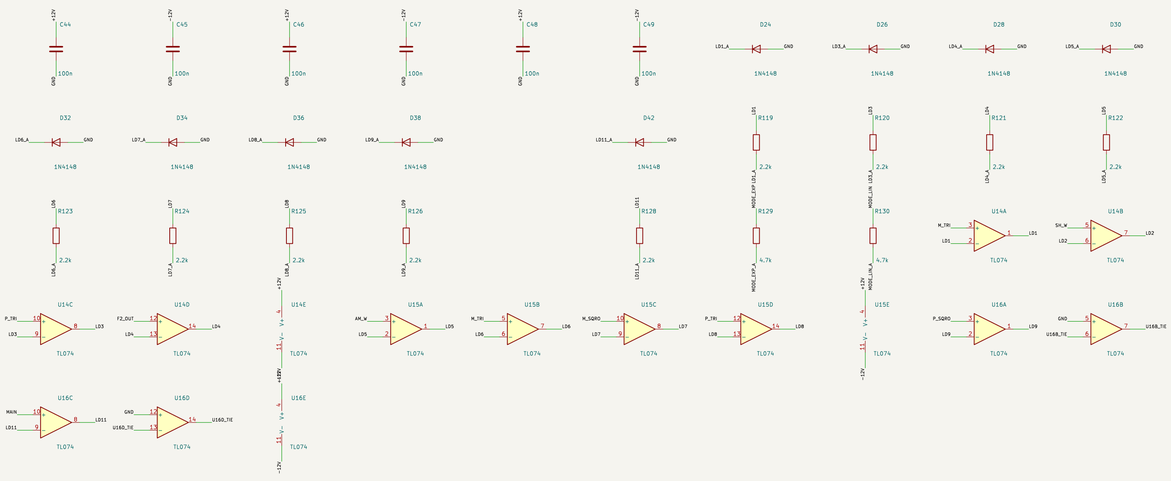

RECKART ELECTRON DYNAMICS
Sheet: /
File: VCO_CIRCUIT.kicad_sch
Title: LORENTZ R-28 Complex Oscillator (after Buchla 259) — Eurorack 28HP
Size: User | Date: | Rev: REV-A
KiCad E.D.A. 9.0.2 | Id: 1/1