
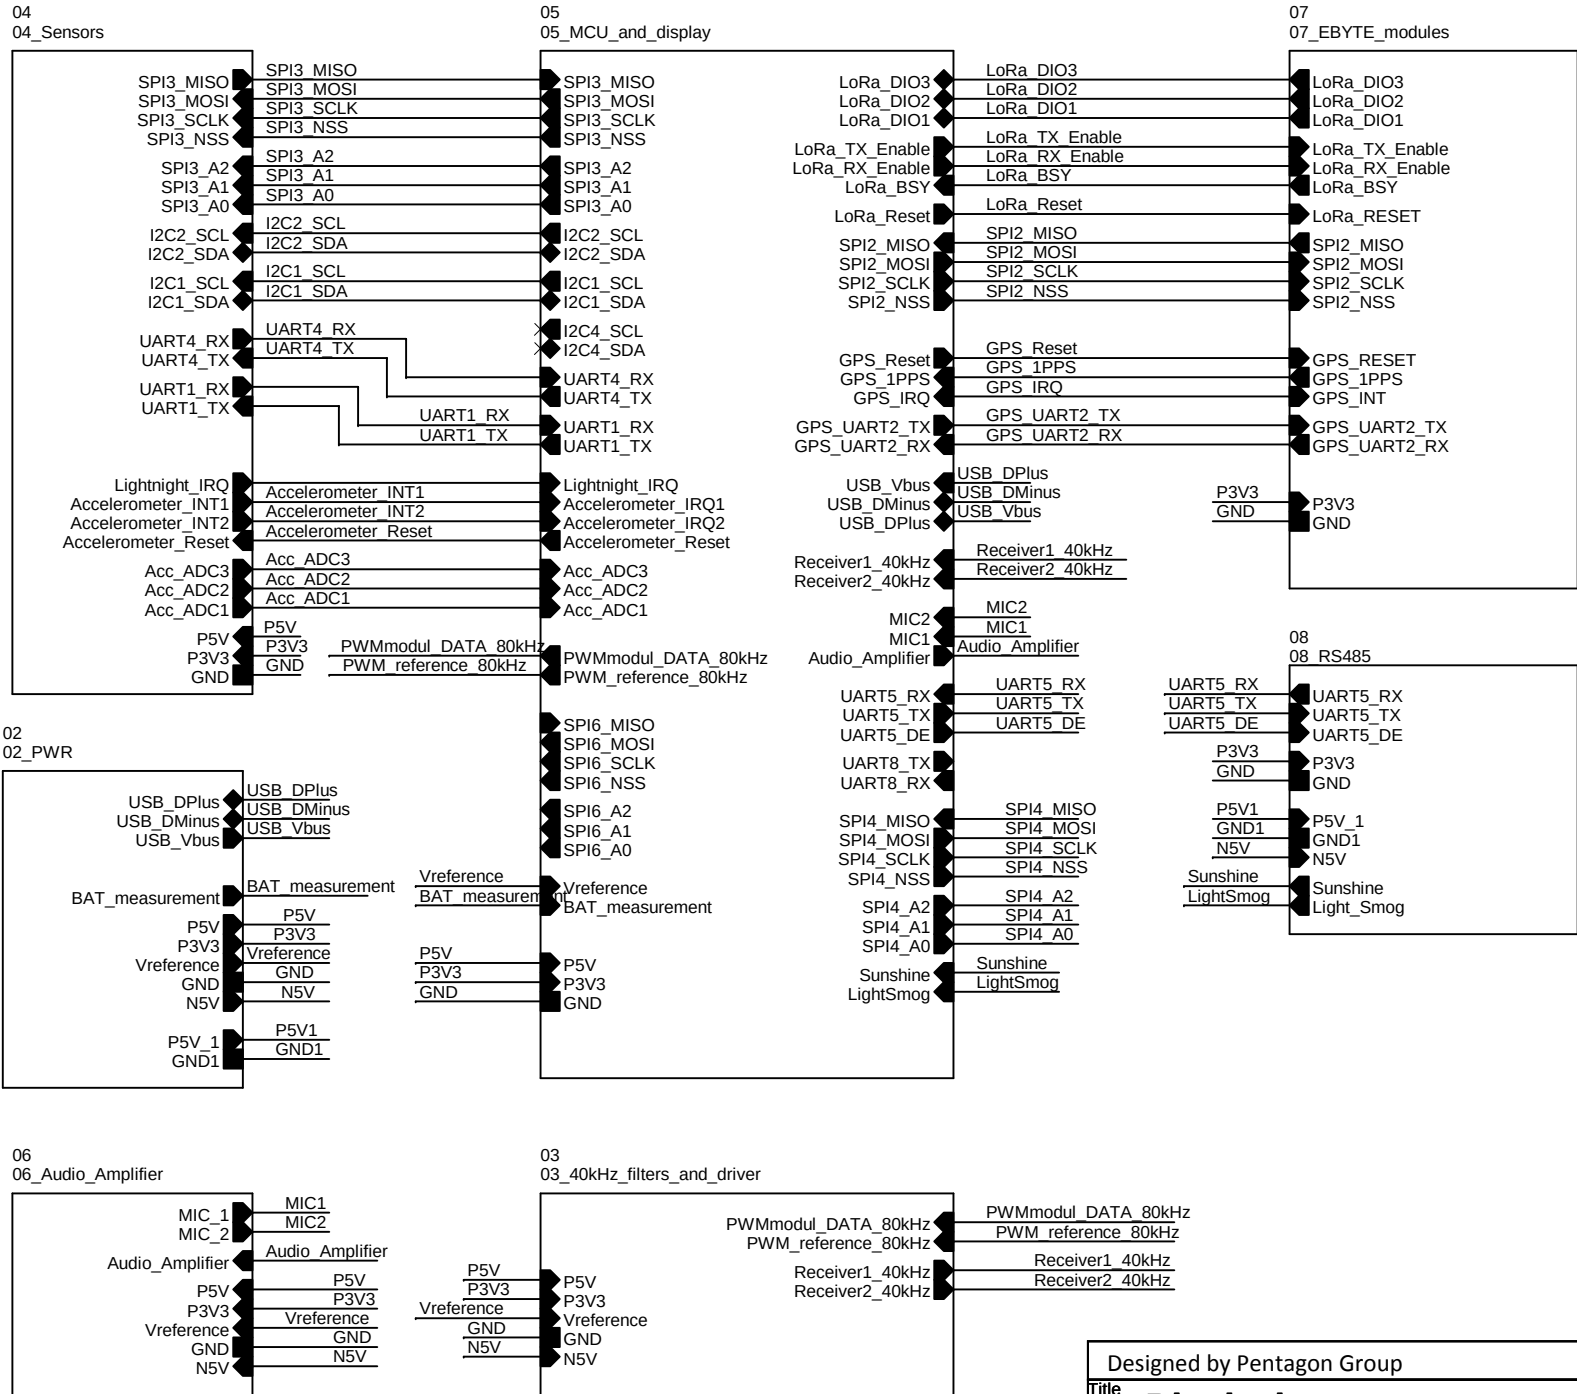


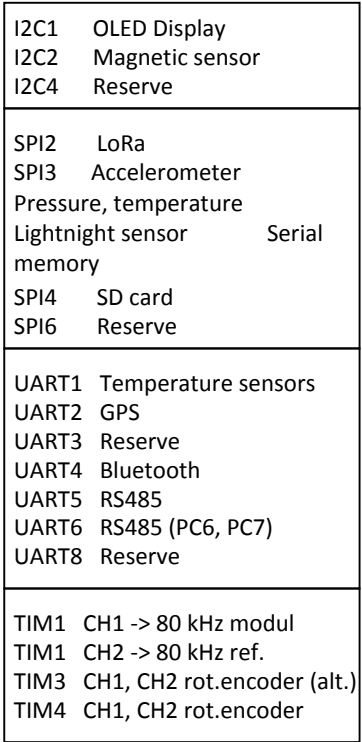

[illegible]

Schematic diagram of the power supply section of the PCB. The input is 5V (P5V), which is connected to a 10uF capacitor (C219) and a 100nF capacitor (C222). The input is then connected to a 3.3uH inductor (L200) and a 100nF capacitor (C223). The output of the inductor is connected to the FB pin of the AP63203WU-7 (IC202). The IC202 is also connected to EN, BST, SW, and GND pins. The output of the IC202 is connected to a 100nF capacitor (C216) and a 100R resistor (R214). The output of the 100R resistor is connected to a 6k8 resistor (R217) and a 10uF capacitor (C224). The output of the 6k8 resistor is connected to a 10uF capacitor (C218) and a 10uF capacitor (C225). The output of the 10uF capacitor (C218) is connected to a 470R resistor (R215) and a green LED (D208). The output of the 470R resistor is connected to the P3V3 output.

Battery measurement








45 V to 3,3 V
12 V to 0,88 V

BAT measurement







R218 39k SMD0603
R219 2k7 SMD0603
R220 3k3 SMD0603
C226 100nF SMD0603
GND

Diagram showing four GND connections labeled HOLE200, HOLE201, HOLE202, and HOLE203.

Designed by Pentagon Group			
Title 02 PWR			
Size A4	Document Number METEO 01		Rev 1.0
Date:	Tuesday, December 30, 2025	Sheet	2 of 9

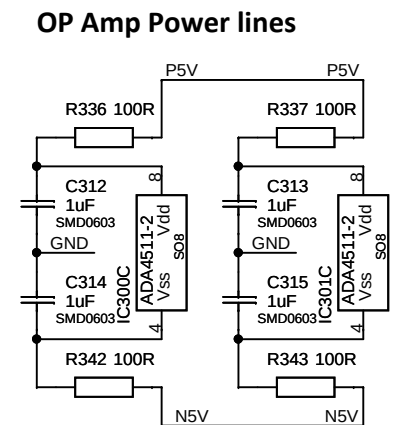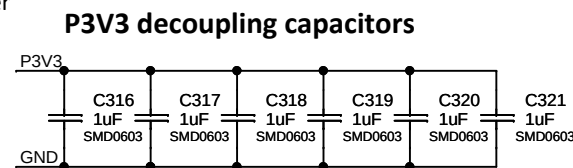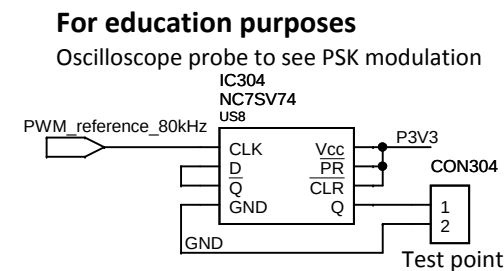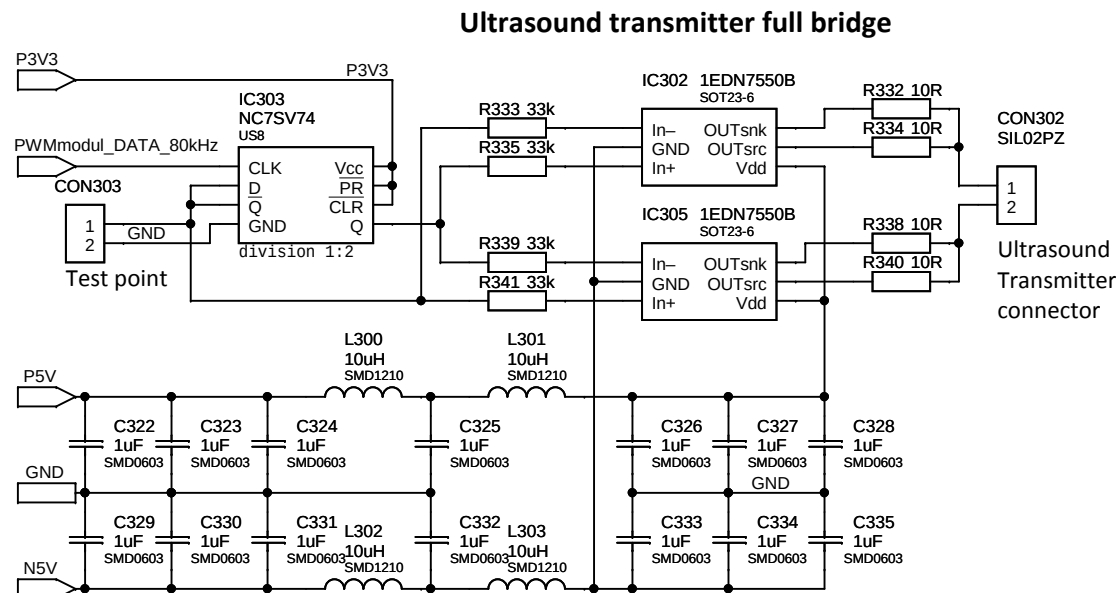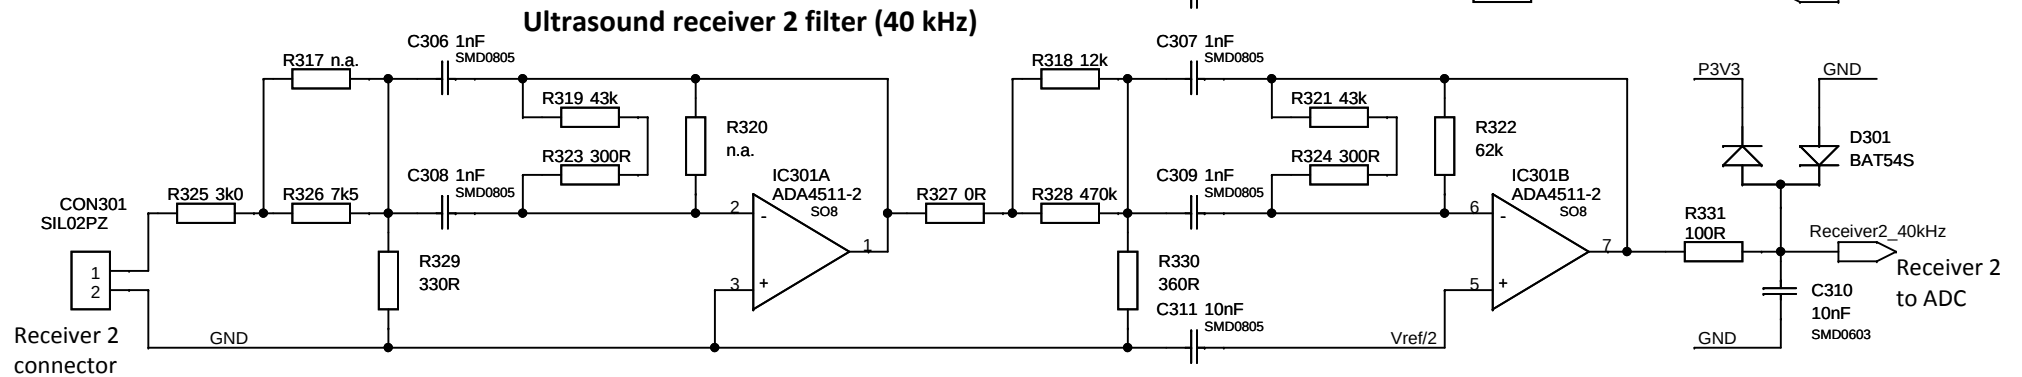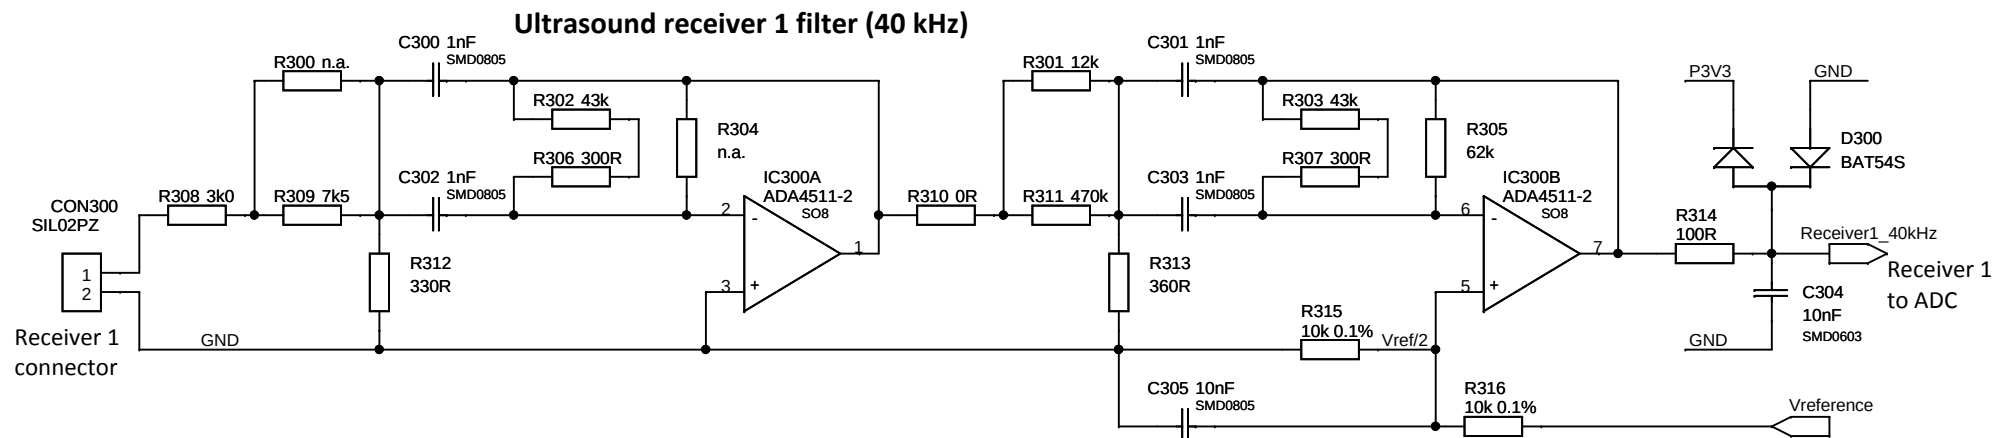

Audio Amplifier

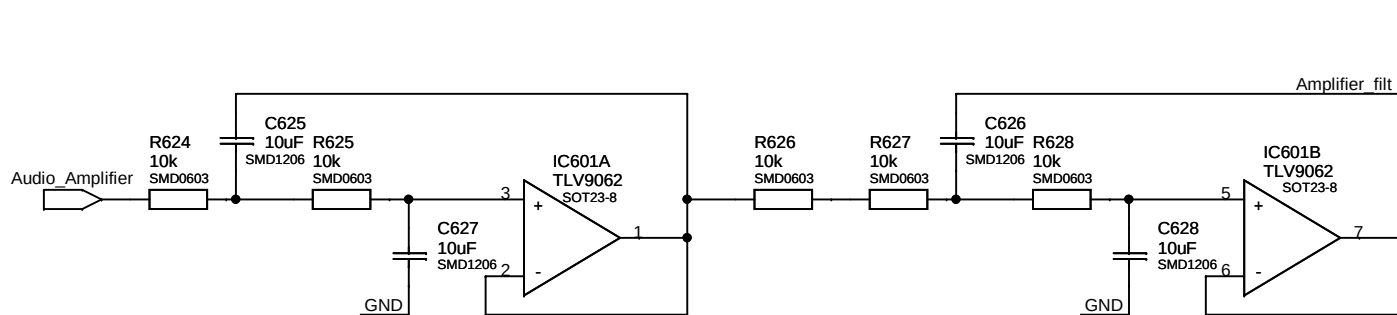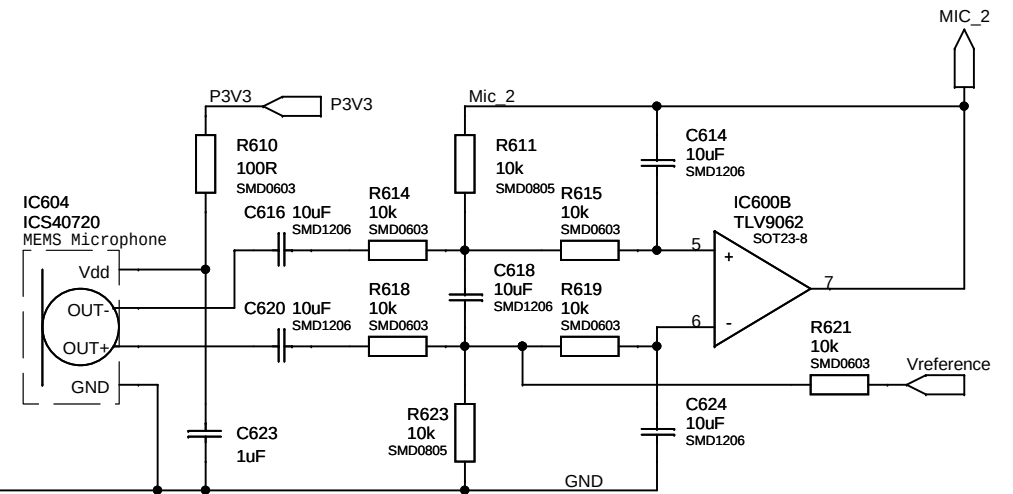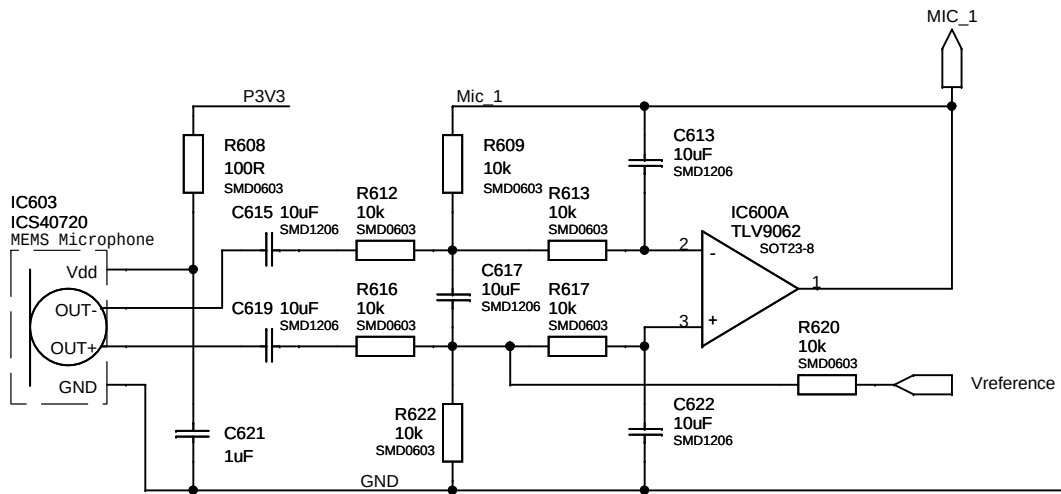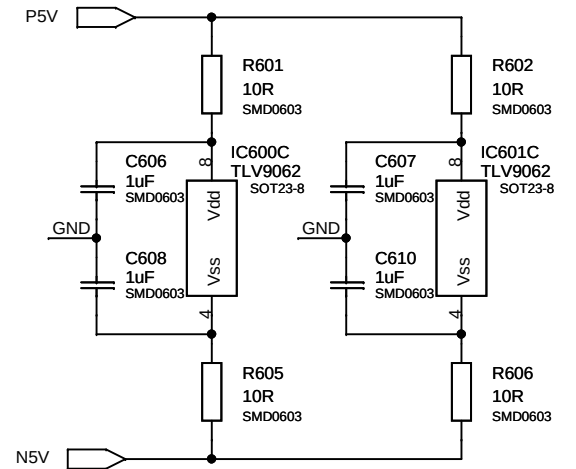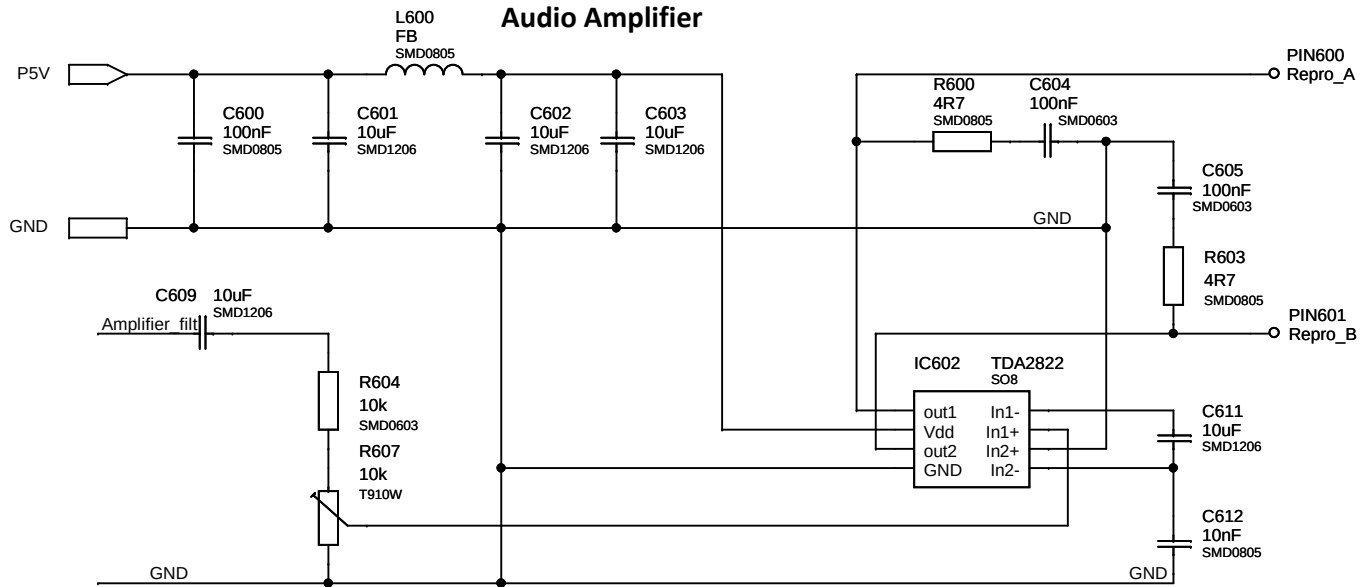

Designed by Pentagon Group

Title	Audo Amplifier
-------	-----------------------

Size	A4
------	----





Document Number

METEO 01


1.0

Date: Tuesday, December 30, 2025



Sheet	6	of	9
-------	---	----	---

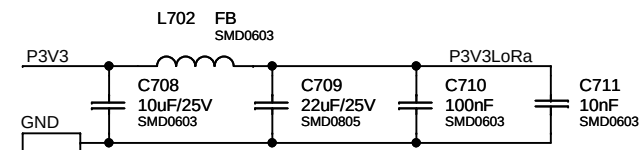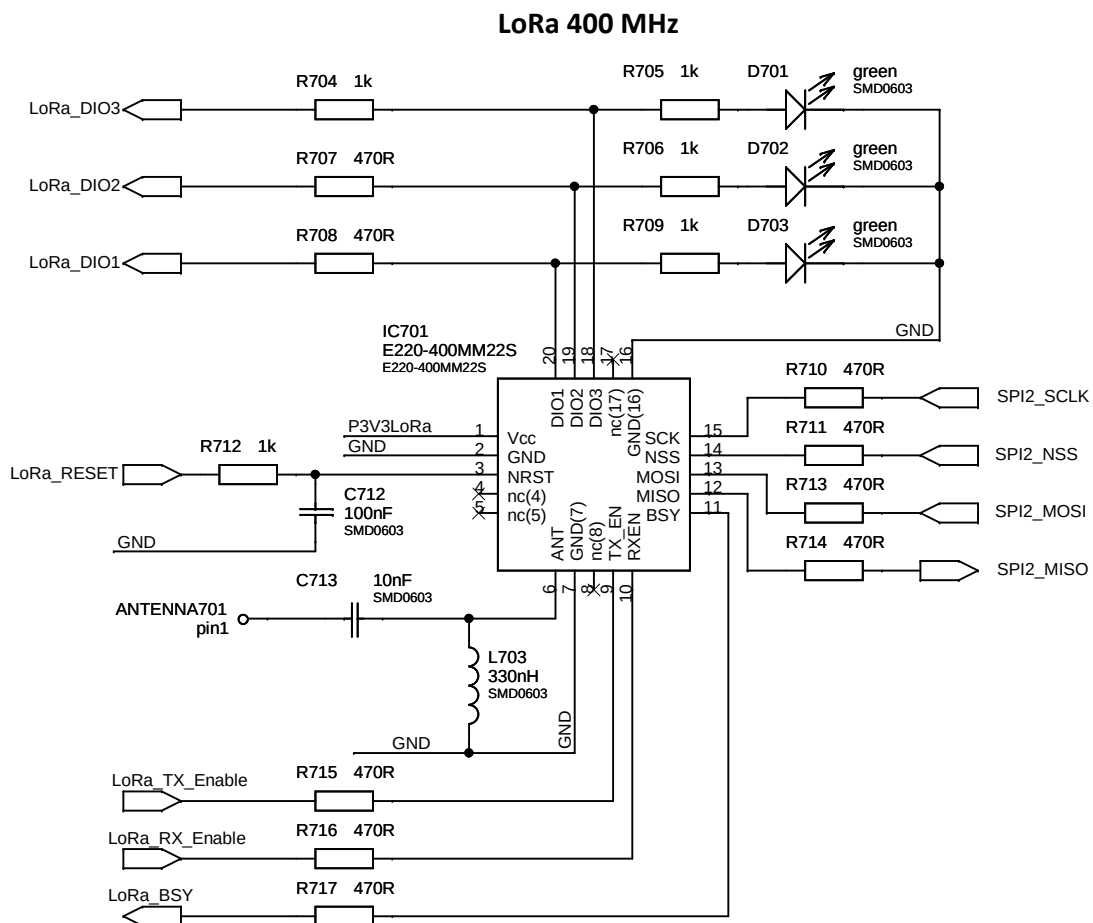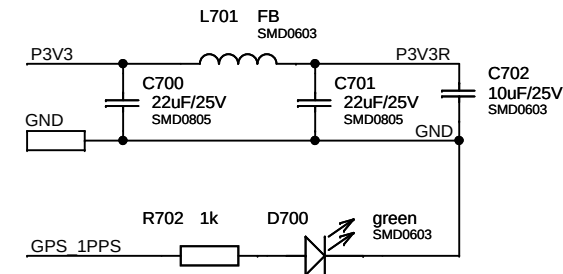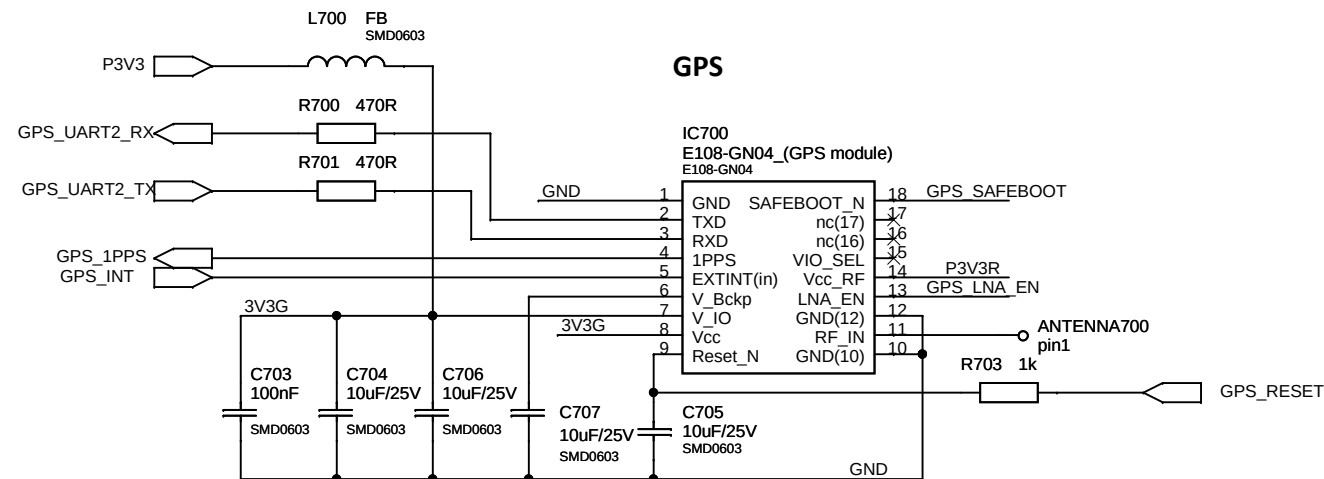


RS485 Interface

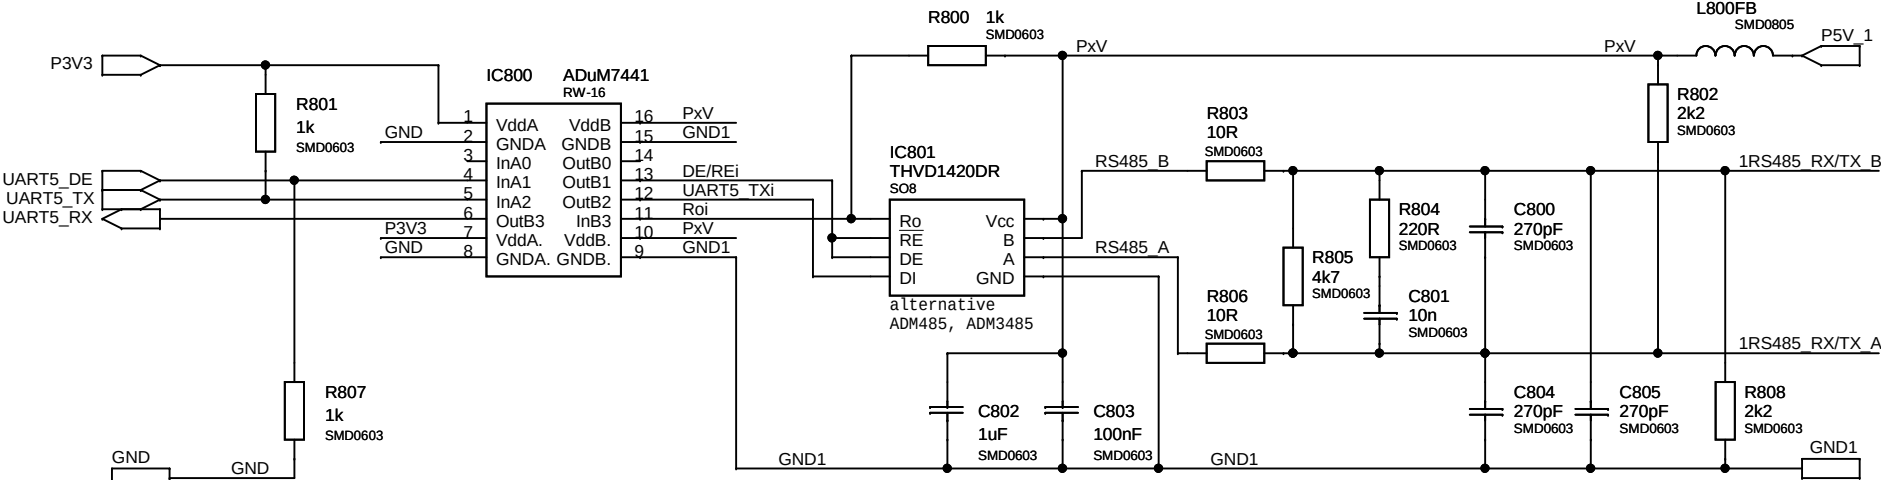



Alternative

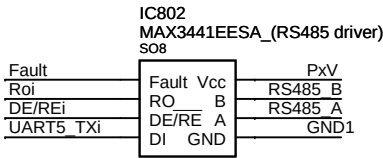

Sunshine measurement

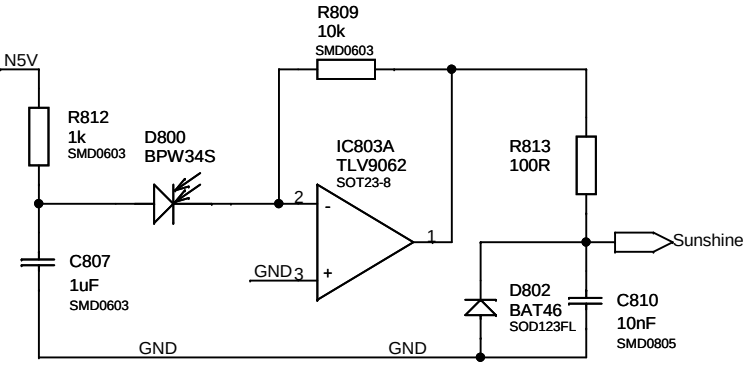

Nighttime Light Smog measurement

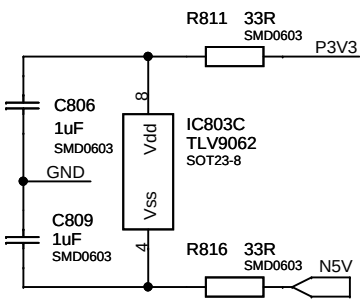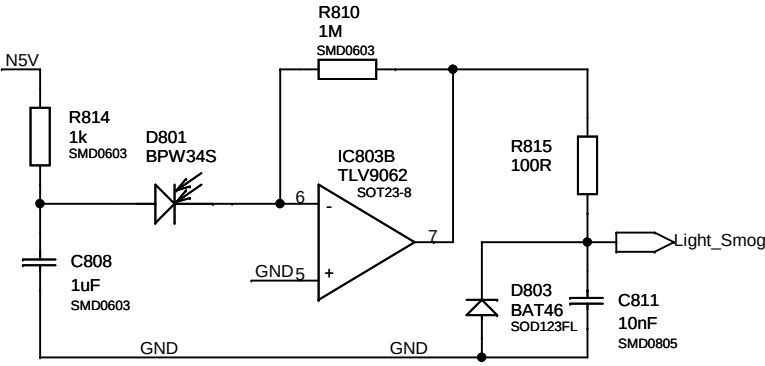

Decoupling capacitors

