PAX alignment run

RUN

205535_pax-live_static-EOM_single-stokes-reference-test
Status: completed

ACQUISITION

Duration: 400.8 s; 2734 fresh samples; 6.96 Hz over recorded samples.

RUN COMMENT

HWP -> QWP -> EOM undriven -> PAX

SETUP

In front of NPBS 1, C port
V_pi expectation only; verify channel and measured driver gain before calibration.

DEFINITIONS

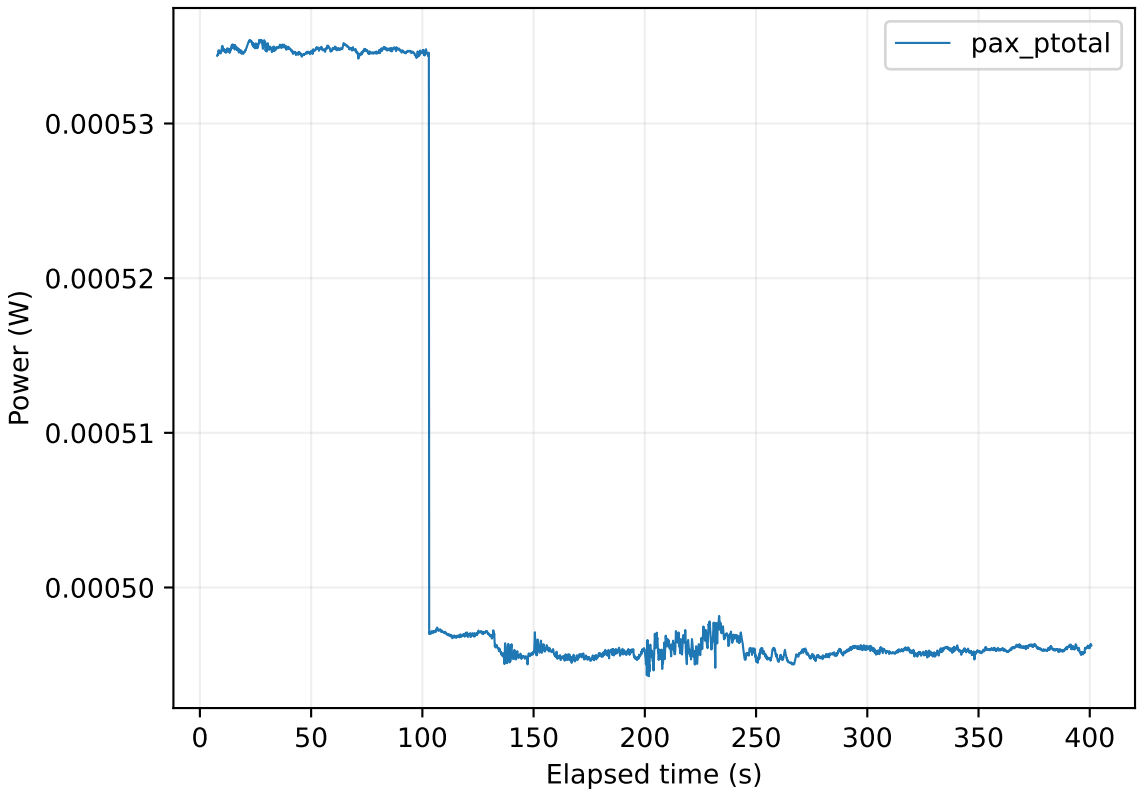
Power: watts. DoP: fraction. S1–S3: the suite's normalized direction (not multiplied by DoP). CSV theta/eta: radians; displayed angles: degrees. No fit or smoothing.

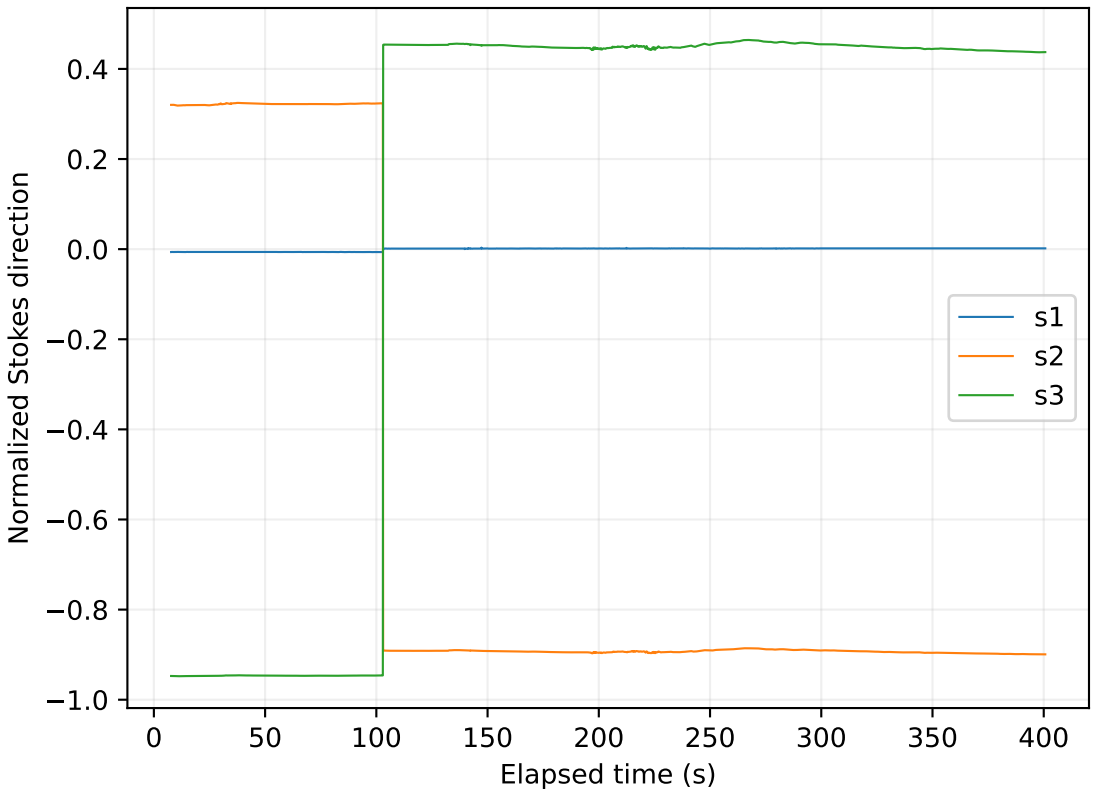
RAW DATA

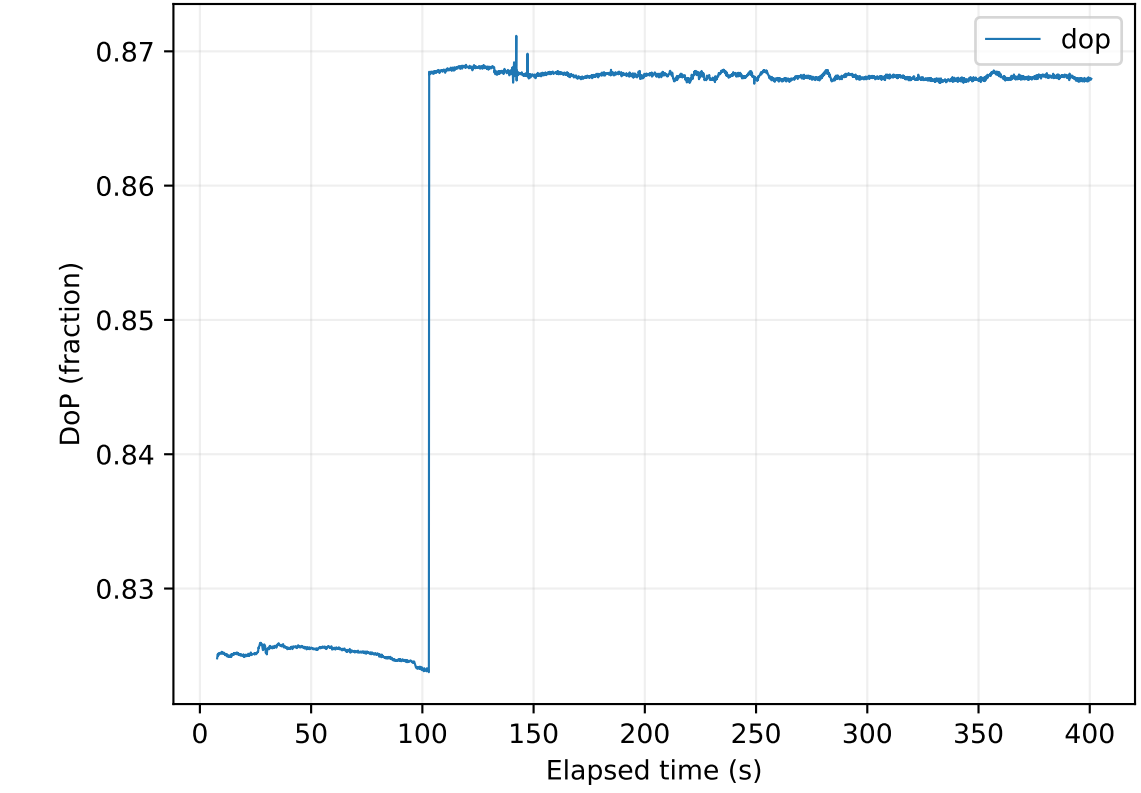
data.csv contains every accepted sample and the full exposed PAX record. Red Pitaya was not connected or measured. Settings/provenance: recipe.json and run.json.

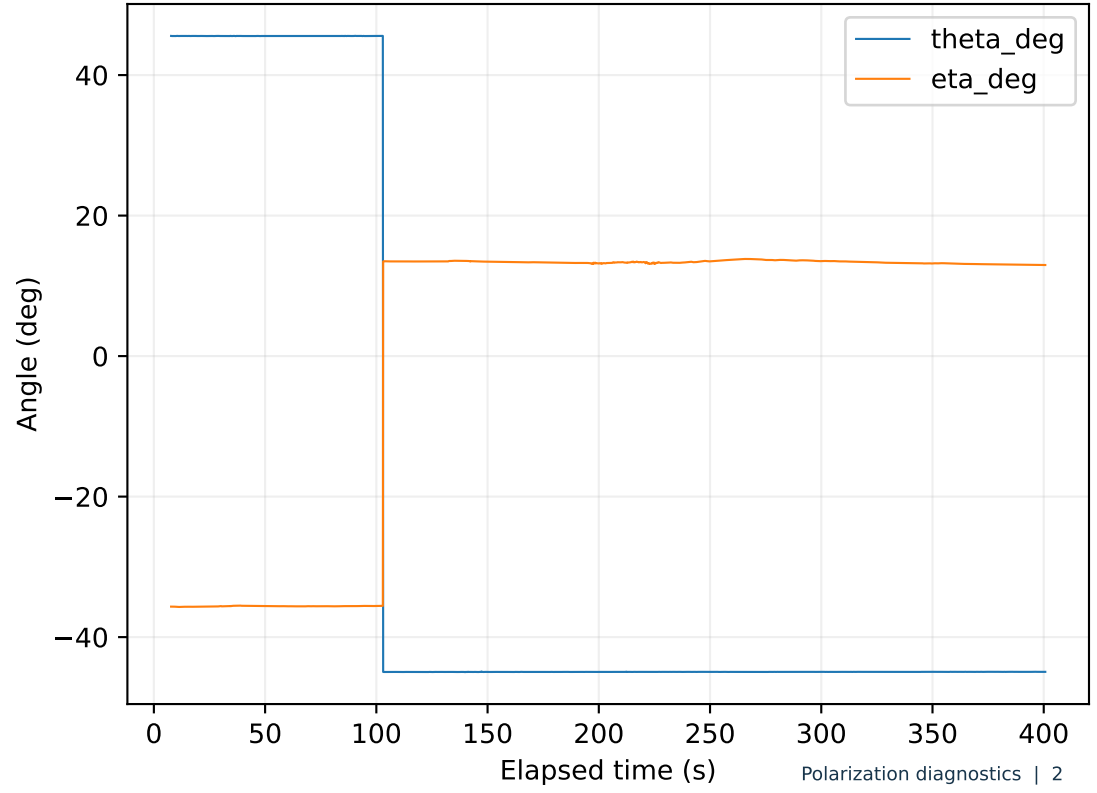
ACQUISITION ISSUES

None


pax_ptotal
Power (W)
0.00053
0.00052
0.00051
0.00050
0
50
100
150
200
250
300
350
400
Elapsed time (s)


Normalized Stokes direction
0.4
0.2
0.0
−0.2
−0.4
−0.6
−0.8
−1.0
s1
s2
s3
0
50
100
150
200
250
300
350
400
Elapsed time (s)


dop
DoP (fraction)
0.87
0.86
0.85
0.84
0.83
0
50
100
150
200
250
300
350
400
Elapsed time (s)


theta_deg
eta_deg
Angle (deg)
40
20
0
−20
−40
0
50
100
150
200
250
300
350
400
Elapsed time (s)