PAX alignment run

RUN

210920_pax-live_quick-test_active-TEC-to-setpoint-10kohms
Status: completed

ACQUISITION

Duration: 6100.4 s; 42305 fresh samples; 6.94 Hz over recorded samples.

RUN COMMENT

down to 10kOhms from 10.70

SETUP

In front of NPBS 1, C port
V_pi expectation only; verify channel and measured driver gain before calibration.

DEFINITIONS

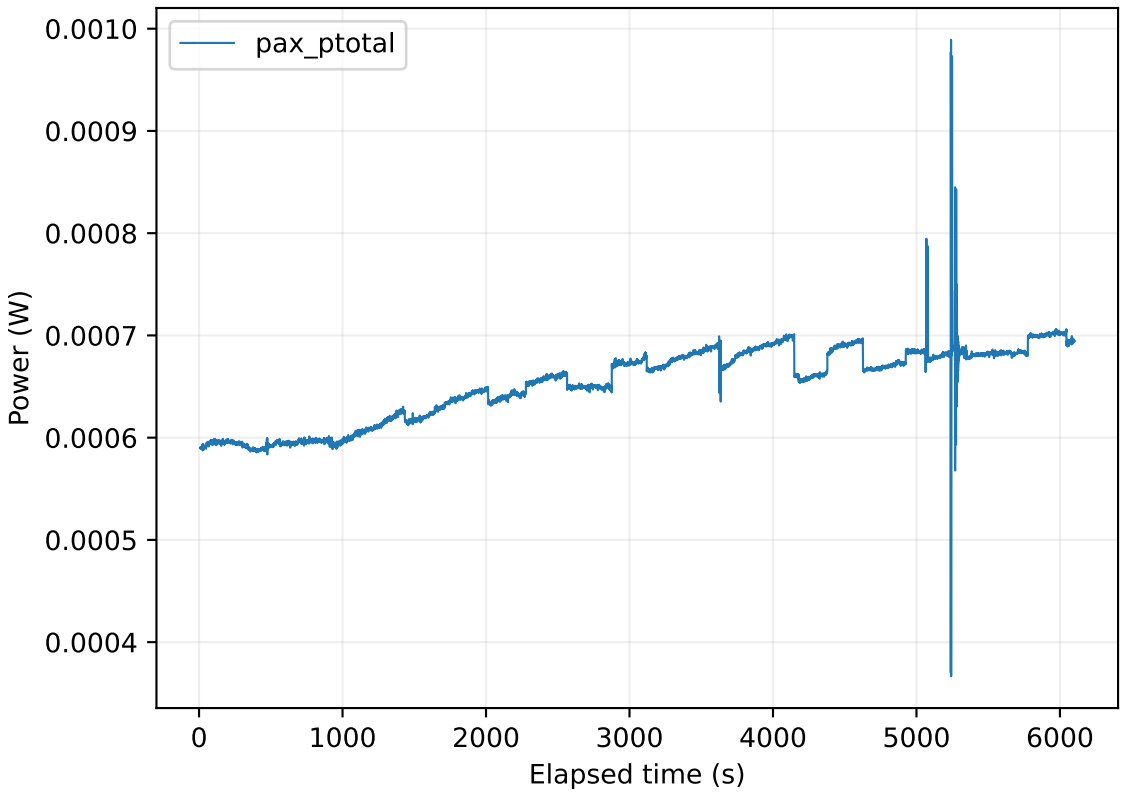
Power: watts. DoP: fraction. S1–S3: the suite's normalized direction (not multiplied by DoP). CSV theta/eta: radians; displayed angles: degrees. No fit or smoothing.

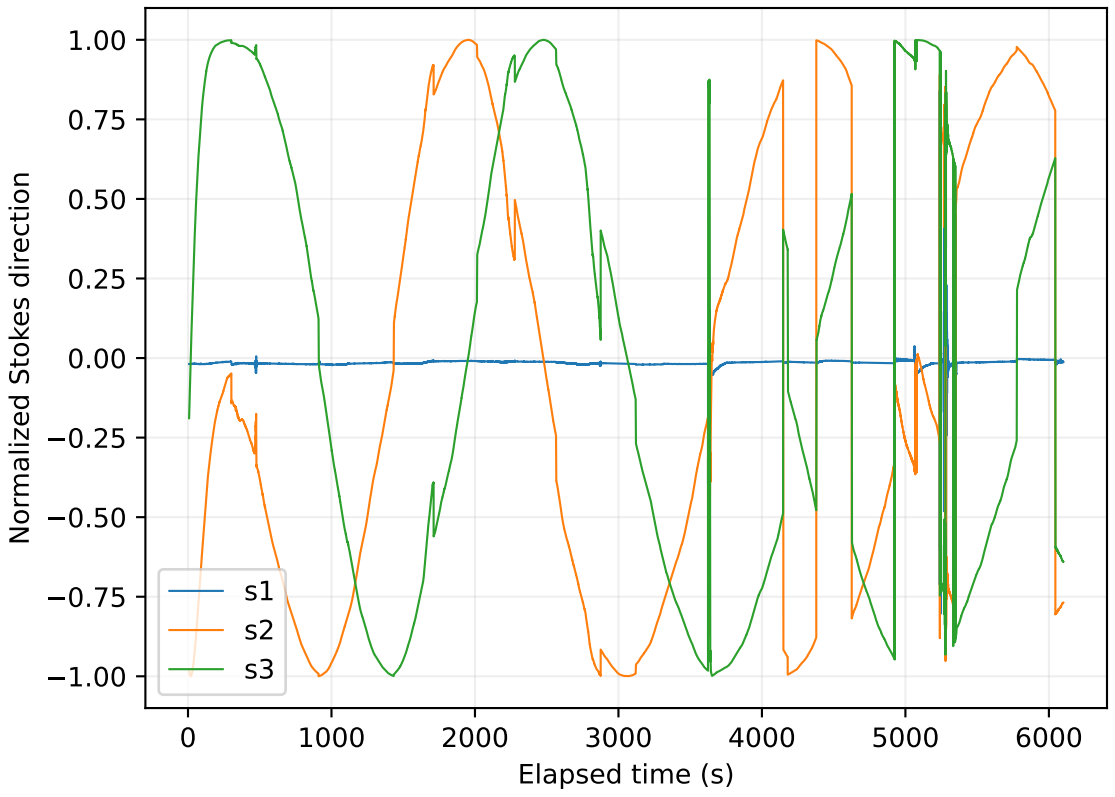
RAW DATA

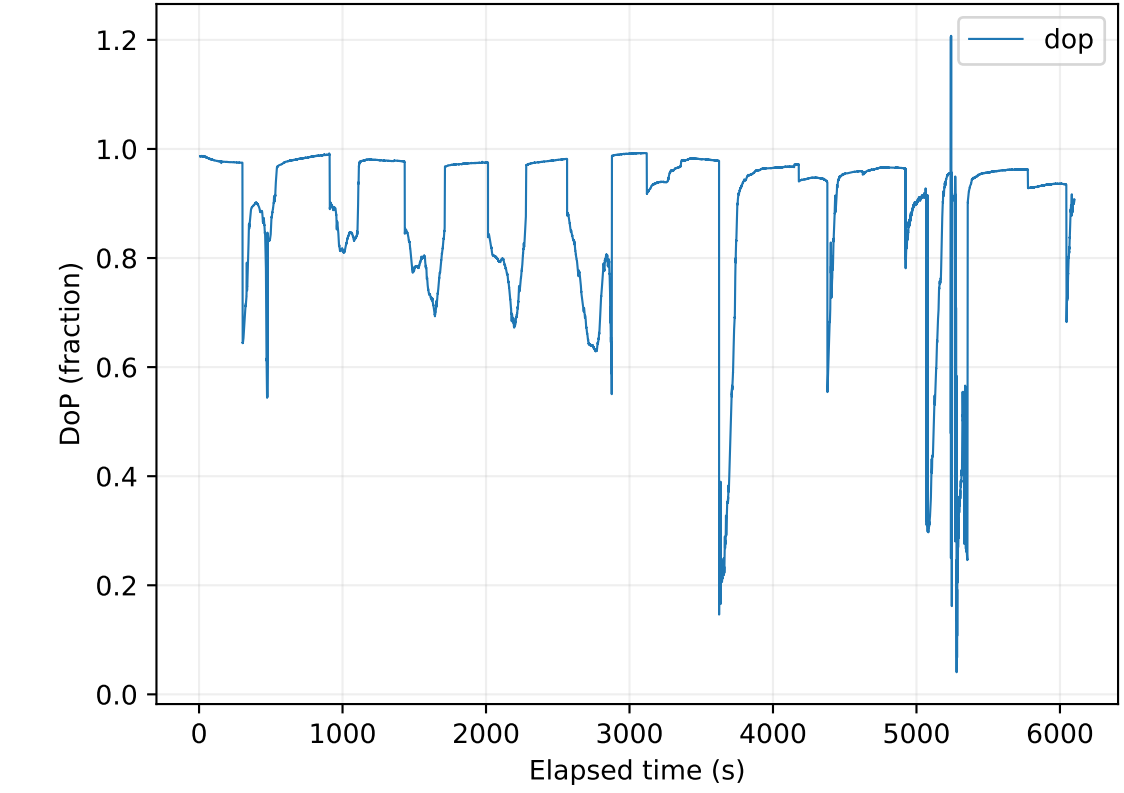
data.csv contains every accepted sample and the full exposed PAX record. Red Pitaya was not connected or measured. Settings/provenance: recipe.json and run.json.

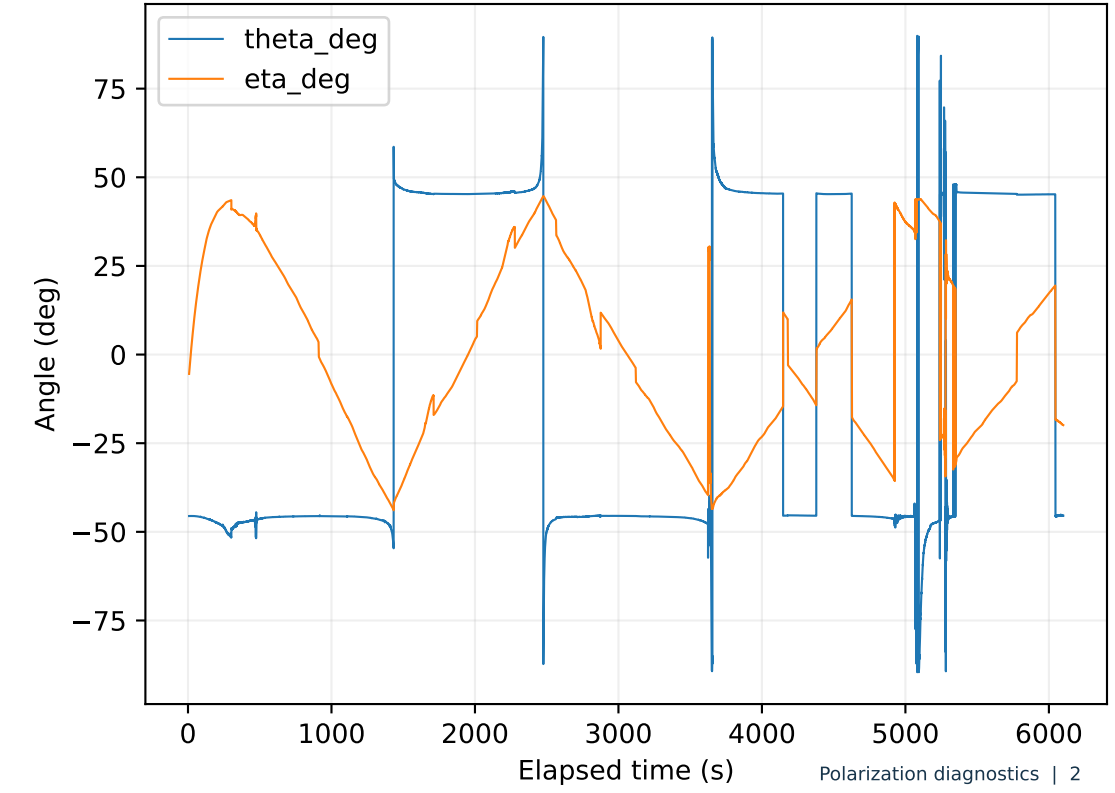
ACQUISITION ISSUES

None


pax_ptotal
Power (W)
0.0010
0.0009
0.0008
0.0007
0.0006
0.0005
0.0004
0
1000
2000
3000
4000
5000
6000
Elapsed time (s)


Normalized Stokes direction
1.00
0.75
0.50
0.25
0.00
−0.25
−0.50
−0.75
−1.00
s1
s2
s3
0
1000
2000
3000
4000
5000
6000
Elapsed time (s)


dop
DoP (fraction)
1.2
1.0
0.8
0.6
0.4
0.2
0.0
0
1000
2000
3000
4000
5000
6000
Elapsed time (s)


theta_deg
eta_deg
Angle (deg)
75
50
25
0
−25
−50
−75
0
1000
2000
3000
4000
5000
6000
Elapsed time (s)