





Alimentation – BQ25896 (charge + power path NVDC), TPS63001 3V3, TPS61023 5V clavier, rail uSD commute, bouton

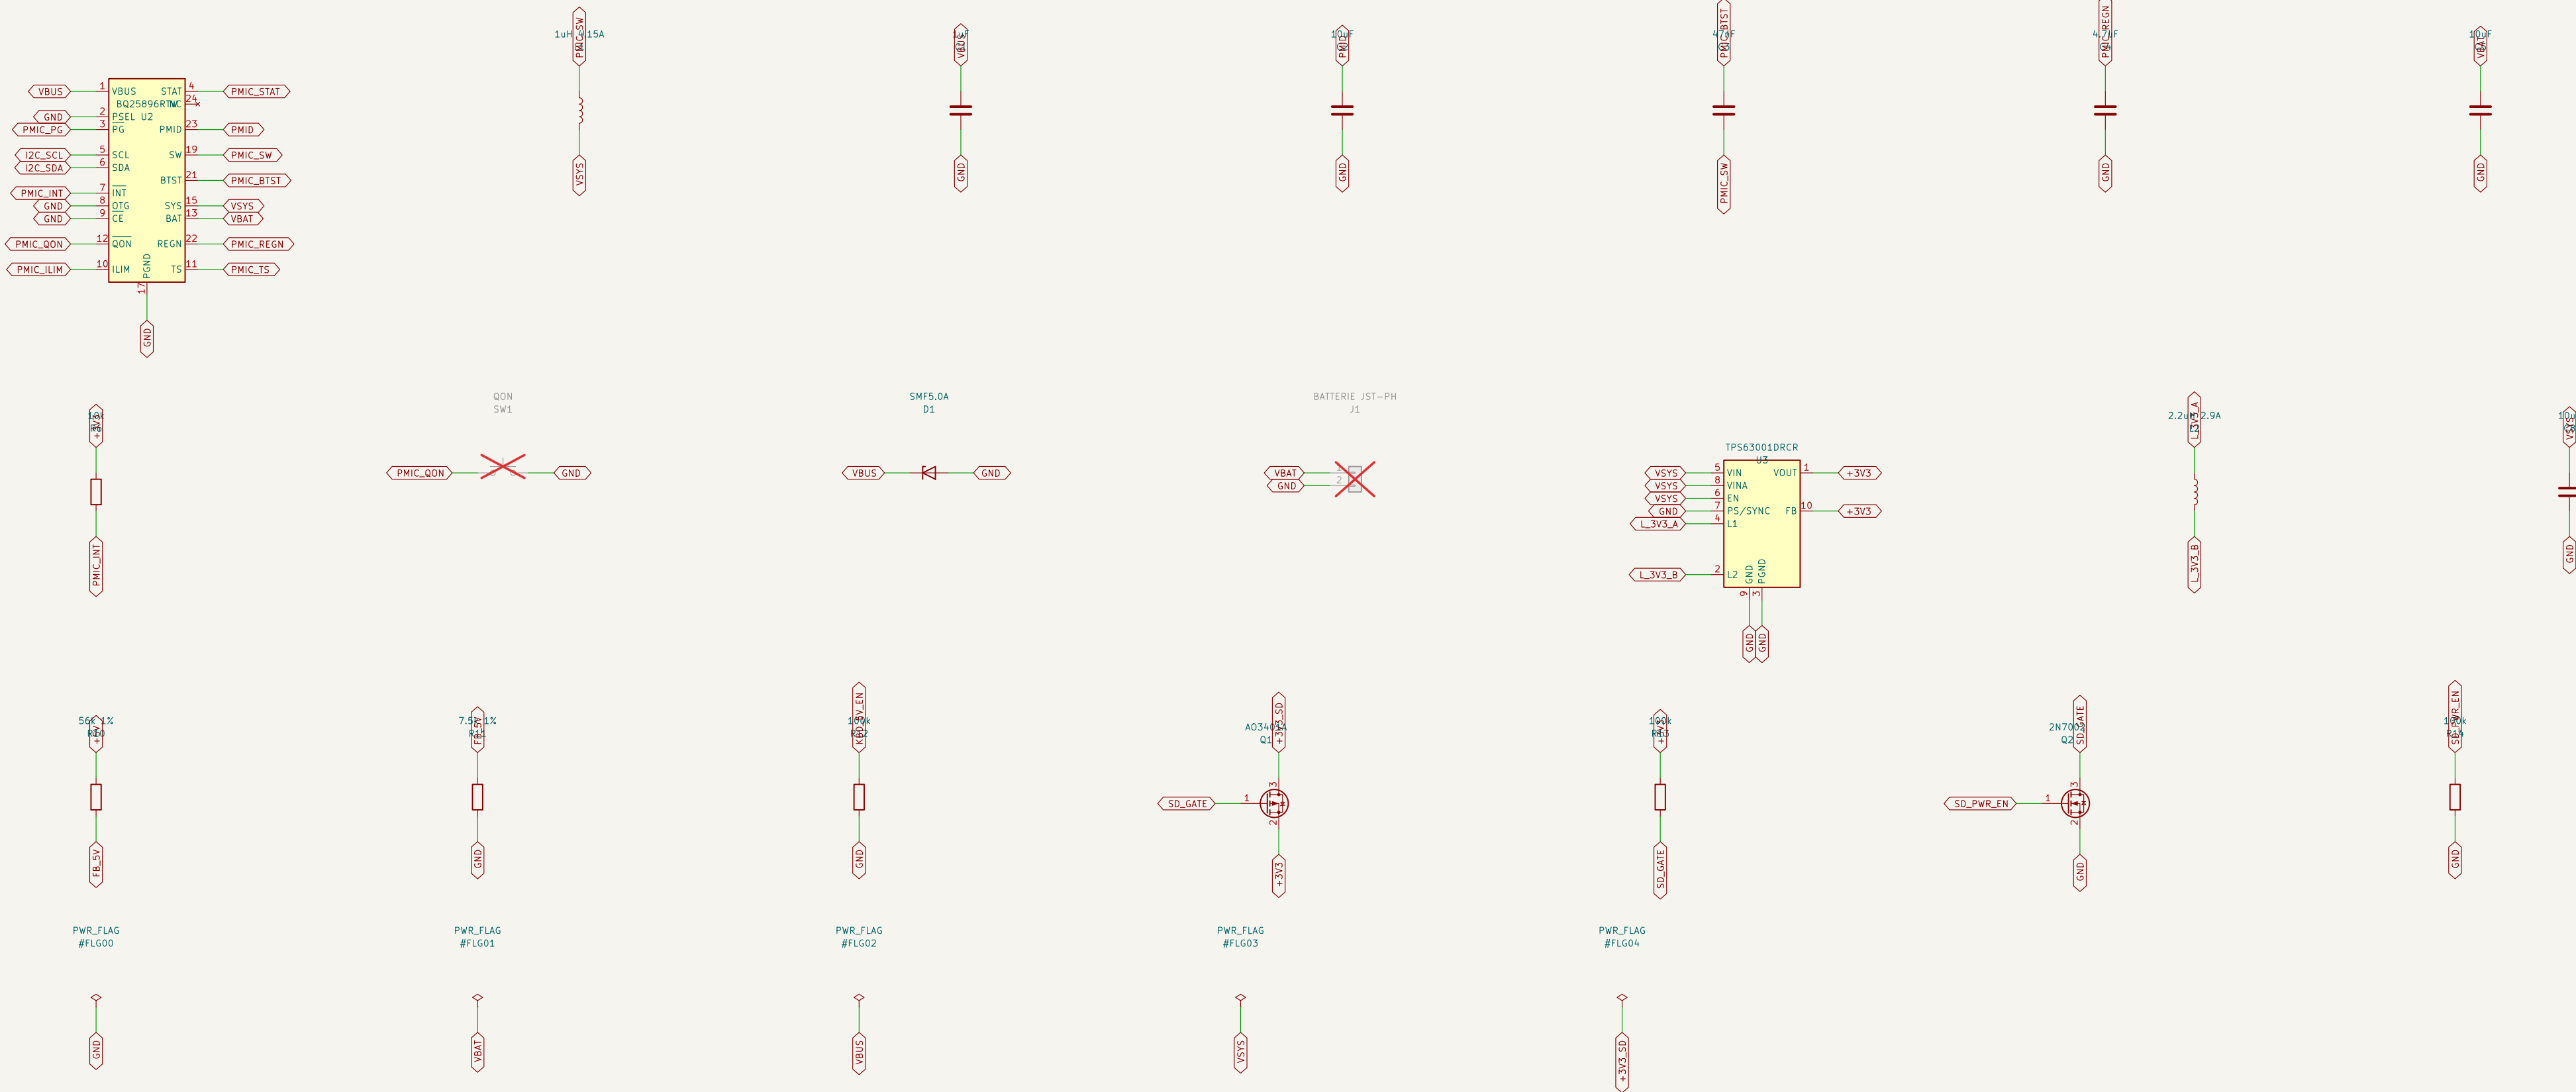

MCU – ESP32–S3–WROOM–1–N16R8, strapping, decouplage

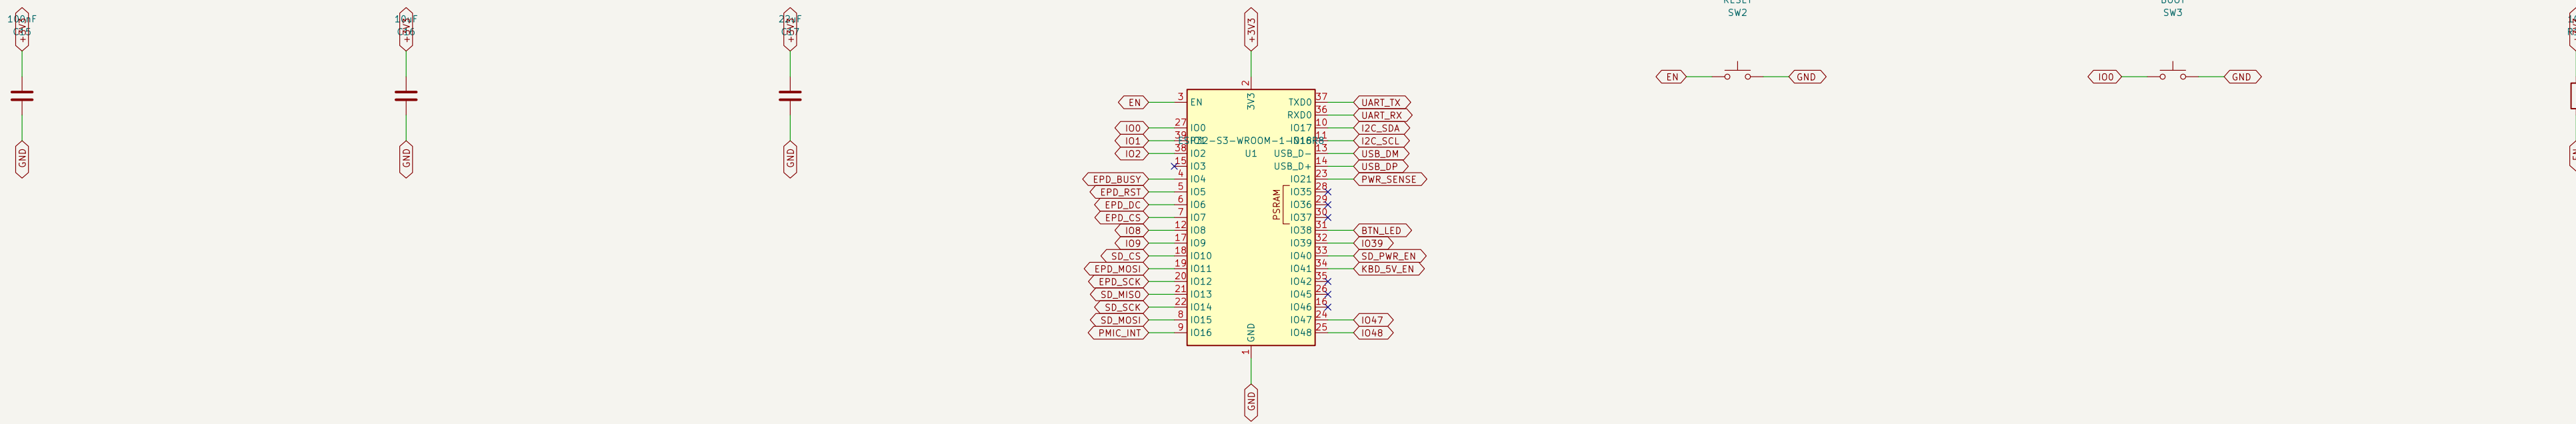

MCU – ESP32–S3–WROOM–1–N16R8, strapping, decouplage

Typoena

Sheet: /mcu/

File: 02–mcu.kicad_sch

Title: Typoena mainboard

Size: A2






Date: 2026–08–15

Rev: A

KiCad E.D.A. 10.0.6

Id: 3/5

Ecran GDEY0579T93 – etage de puissance du \$9, FPC 24p

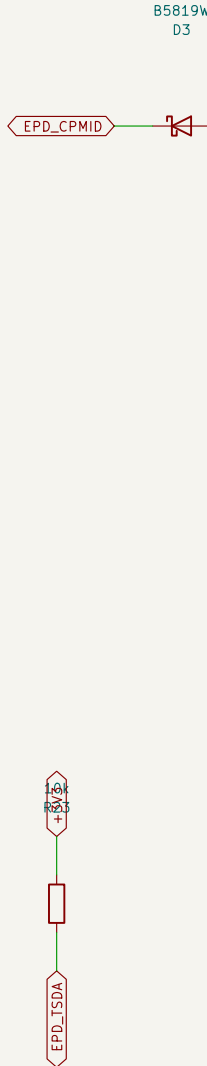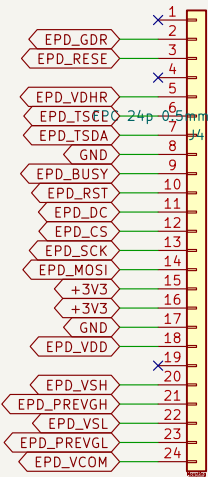

[illegible]