
Flexible Duct Insulation Machine

Automated insulation wrapping for flexible ducts

The Taokron Flexible Duct Insulation Machine automates the process of wrapping insulation cotton around flexible ducts. Handles diameters from Φ100 to Φ600 mm with insulation cotton thickness from 25–100 mm. Designed for continuous high-volume production with automatic length control.

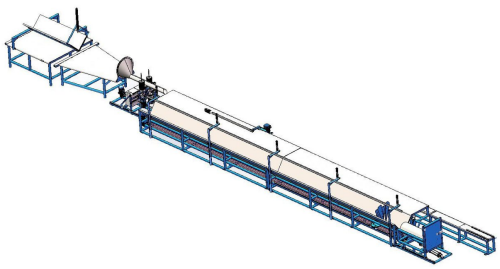

Technical specifications

Parameter	Specification
Diameter	Φ100–Φ600 mm
Foil thickness	0.02–0.08 mm
Strip width	30–60 mm
Wire diameter	0.8–1.2 mm
Insulation thickness	25–100 mm
Power	4 kW
Dimension	19500×2200×2400 mm
Voltage	380V/50Hz/3PH

Australian supplier of HVAC duct machinery · manufacturing since 1995 · ISO 9001:2015 · CE certified · 5,000+ machines installed in 100+ countries

Request a quotation — a mechanical engineer (not a salesperson) replies within 12 hours. sales@sbkjduct.com · WhatsApp +61 435 074 994 · taokron.com/product/flexible-duct-insulation

Specifications taken from the Taokron Product Catalog 2026 and are subject to change without notice. © Taokron · taokron.com