



欢迎来我公司洽谈!
Warmly welcome to visiting our company!



www.sbkj.com
www.sbkj.com.cn
sb@sbkj.com
Tel:+86-510-8606 5300
Fax:+86-510-8606 5200
Add:No.78 Huanxi Road, Zhutang Town,
Jiangyin City, China

THE COMPLETE SOLUTION



Spiral Duct Forming Machines
SBKJ can provide you with a complete set of excellent
quality machines for spiral duct.



Square Duct Forming Machines
Complete set of excellent quality machines for square duct.



We have the excellent in depth knowledge,support and
aftermarket services that ensure your production is
continuous and efficient.

We won't inform our customers beacuse of the improvement of our technolgoy
and production. SBKJ is the registered trademark,it is forbidden to copy
anything from SBKJ. The production and system
in the name of SBKJ is under IPR.

SBKJ-2025-10

注意:因产品不断的更新与升级,部分数据与实物会有变化,最终解释权归本公司所有!



SBKJ MACHINE

since 1995

螺旋风管系列设备

Spiral Tubeformer

管道加工设备

Duct Forming Machinery

钣金成形设备

Metal Forming Machinery

SBKJ GROUP



Introduction

SBKJ SPIRAL TUBEFORMER is based in the Yangtze River Delta, near Shanghai,China. Our company is a national new high-tech enterprise which is specialized in the development and manufacture of machines,such as tube forming machines, plasma cutting machines, for the production of round ducting and fittings in sheet metal, mainly for the climate and ventilation industry. We have gotten the certificates of ISO9001:2000 and CE. We have customers from more than 60 countries in the world.

SBKJ's research and development is the cornerstone for our automatic tubeformers that produce high quality ducts with reduced production costs. SBKJ is established as the foremost and leading innovator in spirl duct manufacturing with several patented inventiong, such as the Flying silitter and Flying crinnper.

Our highly trained technicians will install and set up each SBKJ machine and train your personnel on all facets of the machine's operation and maintenance.

We sincerely welcome both domestic and international friends to cooperate with us.



CONTENTS

螺旋圆管加工设备 Spiral Tube Forming Machine Series

螺旋风管机.....3 Spiral Tubeformer SBTF-2020	胶圈机.....13 Fittingshaper SBJQJ-500	椭圆卷板机.....19 Oval Roller SBOR-1.2x1500
飞剪螺旋圆风管机.....4 Spiral Tubeformer SBTF-1602	电动辘线机.....13 Motor Rotary Machine	液压二辊卷圆机.....19 Hydraulic Rolling Machine SBJY-1500B
螺旋风管机.....5 Spiral Tubeformer SBTF-1500C	铝箔软管机.....14 Aluminum Flexible Duct Forming Machine SBLR-600	电动卷板机.....20 Electrical-driven Bending Machine
螺旋风管机.....5 Spiral Tubeformer SBTF-1500	全自动铝箔软管机.....14 Aluminum Flexible Duct Forming Machine SBLR-600A	风管直缝焊机.....20 Stitchwelder SBSW-30-2Z
大波纹管成型机组系列6 Metal Corrugated Spiral Pipe Machine	保温棉套管机.....15 Flexible duct Insulation machine	升降式直缝焊机.....21 Automatic Stitchwelder SB-ZF1500
螺旋翻边机.....7 Spiral Flanging Machine SBFB-1600	保温棉缩管打包机.....15 Flexible Duct Shrinking Machine	经济型缝焊机.....21 Seamwelder
翻边机.....7 Round Duct Flanging Machine SBSF-1525	简易缩管机.....16 Shrink tube machine	圆法兰生产线.....22 Round Flange Forming Machine SBYFL-50
椭圆风管机.....8 Ovalizer SBHF-3100	帆布软管机.....16 Canvas Flexible Duct Forming Machine	圆法兰冲孔机.....22 Round Flange Punching Machine SBYFL-50-1
风管成型示意图.....9 Forming Flow	铝箔风管机.....17 Aluminum Duct Forming Machine SBLF-500	点焊机.....23 Spotwelder SBDN-40
圆弯头成型图.....10 Elbow Forming Flow	不锈钢铝箔风管机.....17 Stainless Duct Forming Machine	圆法兰碰焊机.....23 Round Flange Welding Machine SBYFLHJ-50
液压弯头机.....11 Gorelocker (Hydraulic) SBEM-1250	等离子切割机.....18 Plasma Cutter	弯头焊机.....23 Elbow Welder
虾米弯头机.....12 Gorelocker(electric)	激光切割机.....18 Laser Cutting Machine	

方风管加工设备 Square Tube Forming Machine Series


全自动风管生产U型五线.....25 Auto Duct Line SBAL-V	液压折边机.....36 Hydraulic Folding Machine	分条机.....43 Slitting machine
全自动插条生产线（C&S）.....26 Automatic C-Driven Slip Duct Work line SBAL-V-1250C	电动剪板机.....36 Electrical-driven Shearing Machine	管道卡箍成型机.....43 Auto Metal Sheet Hoop Machine
全自动风管生产三线.....27 Auto Duct Line SBAL-III	气动折边机.....37 Pneumatic Folding Machine	液压铆钉机.....44 Hydraulic riveting machine
全自动风管生产二线.....28 Auto Duct Line SBAL-II	共板法兰折边机.....37 Transverse Duct Flange Hand Folder	手持激光焊机.....44 Handheld laser welding machine
TDF立式方管合缝机.....29 Duct Zipper (For TDF Duct) SBHF-1.5x1500TDF	压筋机.....38 Grooving Machine	电动合缝机.....45 Seam closing machine F1275-PRO
方管合缝机.....30 Seam Closing Machine SBHF-I	辘剪压筋机.....38 Power Slitting and Beading Machine SBLQ-15	无钉铆接机.....45 Nail-free riveting machine F350
角钢冲孔机.....31 Angle Iron Punching Machine SBCK-50W	放料架.....39 Run out table	中频焊机.....46 Medium Frequency Welding Machine
角铁法兰四枪自动焊机.....32 Four Gun Automatic Angle Iron Flange Welding Machine SB-FS1535L	软连接成型机.....39 Flexible duct connector machine	蜗壳合缝机.....46 Snail Seam Closing Machine SBWKHFJ-45
插接式法兰机.....33 Transverse Duct Connector Flange Forming Machine	角码生产线.....40 Auto corner making machine	模具.....47 SBKJ Forming Heads
咬口机.....34 Lockformer	角码模具.....41 Corner mold	方形风管制作应用实例.....48 Application in duct making
共板法兰机.....35 Transverse Duct Flange Forming Machine	复合板切割机.....42 Composite board cutting machine	连接系列.....49 Method of Connecting Duct
变频卡条切断共板法兰机.....35 Transverse Duct Flange cleat cutting machine	勾码卡条切断机.....42 Cleat Cutting Machine SBKT-12	企业证书/专利.....50 Certificate/Patent

Spiral Tubeformer SBTF-2020
螺旋风管机

Spiral Tubeformer	
SBTF-2020 (SEW, 0.4-2.0mm)	\$46,750



Technical Data	
卷管直径 Diameter	φ80-2500mm
加工板厚 Thickness	镀锌板 Galvanized steel 0.4 - 2.0 mm
	不锈钢 Stainless steel 0.4 - 1.2 mm
	铝板 Aluminum 0.4 - 2.0mm
加工板宽 Width	Standard 137mm 0.4-1.0 mm
	Standard 140mm 1.1-1.3 mm
	Standard 150mm 1.4-2.0 mm
切割方式 Cutting System	等离子切割、滚剪切割 Plasma cut and flying slit
功率 Power	22kw
主机重量 Weight	3200kg
外形尺寸 Dimension	2100mm×1800mm×1500mm (主机 Mainframe) 2000mm×1100mm×1300mm (放料架 Decoiler) 2450mm×1200mm×1200mm (出料架 Run-out table)
电压 Voltage	380V/50HZ/3PH

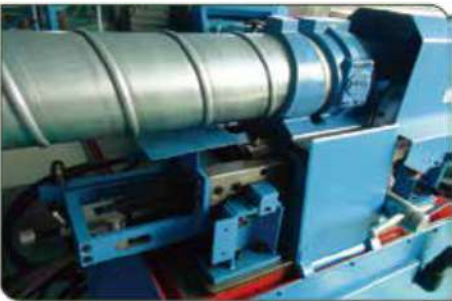

Spiral Tubeformer SBTF-1602
飞剪螺旋圆风管机

Spiral Tubeformer	
SBTF-1602 (SEW)	\$32,250
SBTF-1602 (domestic)	\$27,850
SBTF-1602B (integr.)	\$24,900




Technical Data	
直径 Diameter	φ80-φ1600mm
厚度 Thickness	镀锌板 galvanized steel 0.4-1.3mm, 不锈钢 stainless steel 0.4-0.8mm 铝 aluminium 0.4-1.3mm 其他可按客户需要配置 Other profiles on request.
加工板宽 Width	Standard 137mm 0.4-1.0 mm thickness, Standard 140 mm 1.1-1.3 mm thickness 其他可按客户需要配置 Other profiles on request.
咬口 Lockseam	外咬口, 可按要求内咬口 Outside lock, inside lock as request
切割系统 Cutting System	专利飞剪切割 The patented flying slit.
其他 Options	自动定长切割 Automatic length control system. 压筋装置 Controlled corrugation unit. 每道一个或两个 Either one or two beads. (选配 Optional)
功率 Power	主机 Mainframe 11KW 冷却水泵 Cooling water pump 0.25 KW
重量 Weight	2900Kg
外形尺寸 Dimension	2000mm×1700mm×1450mm (主机 Mainframe) 2000mm×1100mm×1300mm (放料架 Decoiler) 2450mm×1200mm×1200mm (出料架 Run-out table)
电压 Voltage	380V/50HZ/3PH



Spiral Tubeformer SBTF-1500C
螺旋风管机

Spiral Tubeformer (1500 series)	
SBTF-1500C (saw+plasma)	\$15,700
SBTF-1500A (plasma)	\$12,000
SBTF-1500 (saw)	\$10,550
SBTF-2000 (0.4-1.5mm)	\$20,100

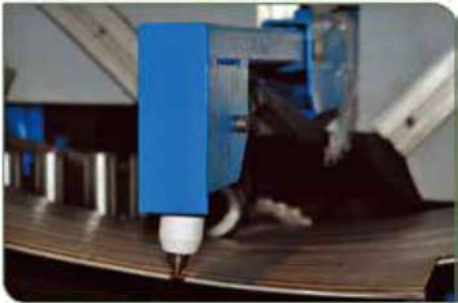


Technical Data

卷管直径 Diameter range	φ100-φ1500mm	
加工板厚 Thickness of Strip	0.4-2.0mm(镀锌板 Galvanized steel)	0.4-1.2mm(不锈钢 Stainless steel)
加工板宽 Width of Strip	Standard 137 mm	
切割方式 Cutting System	等离子切割, 锯片切割 Plasma Cutter, Saw Blade Cutting	
功率 Power	主机 Mainframe 11Kw, 锯片切割功率 Saw Blade Cutting Power 4Kw, 等离子切割功率 Plasma Cutting power 12Kw	
重量 Weight	2300Kg	
外形尺寸 Dimension	3800mm×2160mm×2720mm	

Metal Corrugated Spiral Pipe
大波纹管成型机组系列

Metal Corrugated Spiral	
SBHCSP-1 / -2 / -3	Quote on request

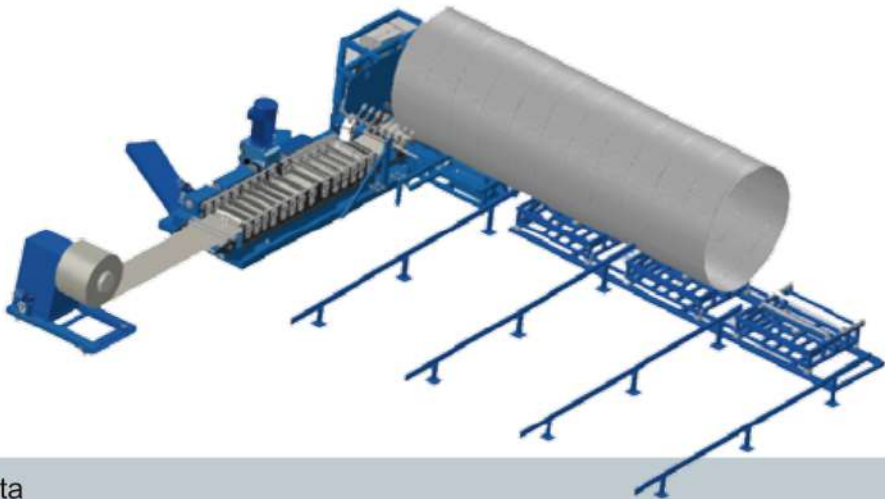

Technical Data

型号 Model	SBHCSP- I	SBHCSP- II	SBHCSP- III
板材厚度 Thickness	1.2-2.0mm	2.0-3.0mm	2.2-3.4mm
加工波形 Wave	38×6.5mm	68×13mm	75×25mm
管径范围 Diameter	φ300-φ1000mm	φ500-φ1700mm	φ1000-φ3000mm
设备功率 Power	30Kw	55Kw	75Kw
切割方式 Cutting system	等离子切割 Plasma cutter	等离子切割 Plasma cutter	等离子切割 Plasma cutter

Spiral Tubeformer SBTF-1500
螺旋风管机



Technical Data

卷管直径 Diameter	φ80-φ1500mm	
加工板厚 Thickness	0.4-1.2mm(镀锌板 Galvanized steel)	0.4-0.8mm(不锈钢 Stainless steel)
加工板宽 Width	Standard 137 mm	
功率 Power	主机 Mainframe 5.5 Kw ; 锯片切割功率Saw Blade Cutting Power 4 KW	
切割方式 Cutting System	锯片切割 Saw Blade Cutting	
重量 Weight	1708kg	
外形尺寸 Dimension	3400mm×2070mm×2720mm	



Spiral Flanging Machine
螺旋翻边机

Flanging Machines
SBSF-1525 Hydraulic Flanging \$5,950



Technical Data	
型号 Model	SBFB-1600
直径范围 Diameter range	φ200-1600mm
板材厚度 Thickness of Strip	0.4-1.2mm(镀锌板 Galvanized steel)
翻边宽度 Flanging width	7-20mm
加工速度 Speed	1-30m/min
电机功率 Power	1.5Kw
设备重量 Weight	810Kg
外形尺寸 Dimension	3350×850×1200mm

Round Duct Flanging Machine SBSF-1525
翻边机



Technical Data		
功率 Power	2.5kw	
适应材质 Material	0.5-3mm Black Steel	0.4-2.5mm Stainless Steel
加工管径 Diameter	100mm-1600mm	
翻边宽度 Flanging width	7mm、10mm、13mm	
最大承重 Max.weight capacity	800kg	
外型尺寸 Dimension	2050mm×1180mm×820mm	
重量 Weight	620kg	


Ovalizer SBHF-3100
椭圆风管机

Ovalizer
SBHF-3100 (Ø<=500 dies) \$23,450
SBHT-2100 (compact) \$24,900




Technical Data	
板厚范围 Thickness	0.4-1.2 mm
最大管长 Max.Duct Length	3100 mm
臂张范围 Arm Range	最小圆管直径 Minimum diameter 330 mm
模具规格 Die Specification	Φ150、Φ200、Φ250、Φ300、Φ350、Φ400、Φ450、Φ500
托架规格 Tray Specification	50、100、200、300、400、500、600 mm
功率 Power	18.5 Kw
重量 Weight	2720 Kg
外形尺寸 Dimension	5630mm×1250mm×1130 mm
电压 Voltage	380V/50HZ/3PH

Forming Flow 风管成型示意图

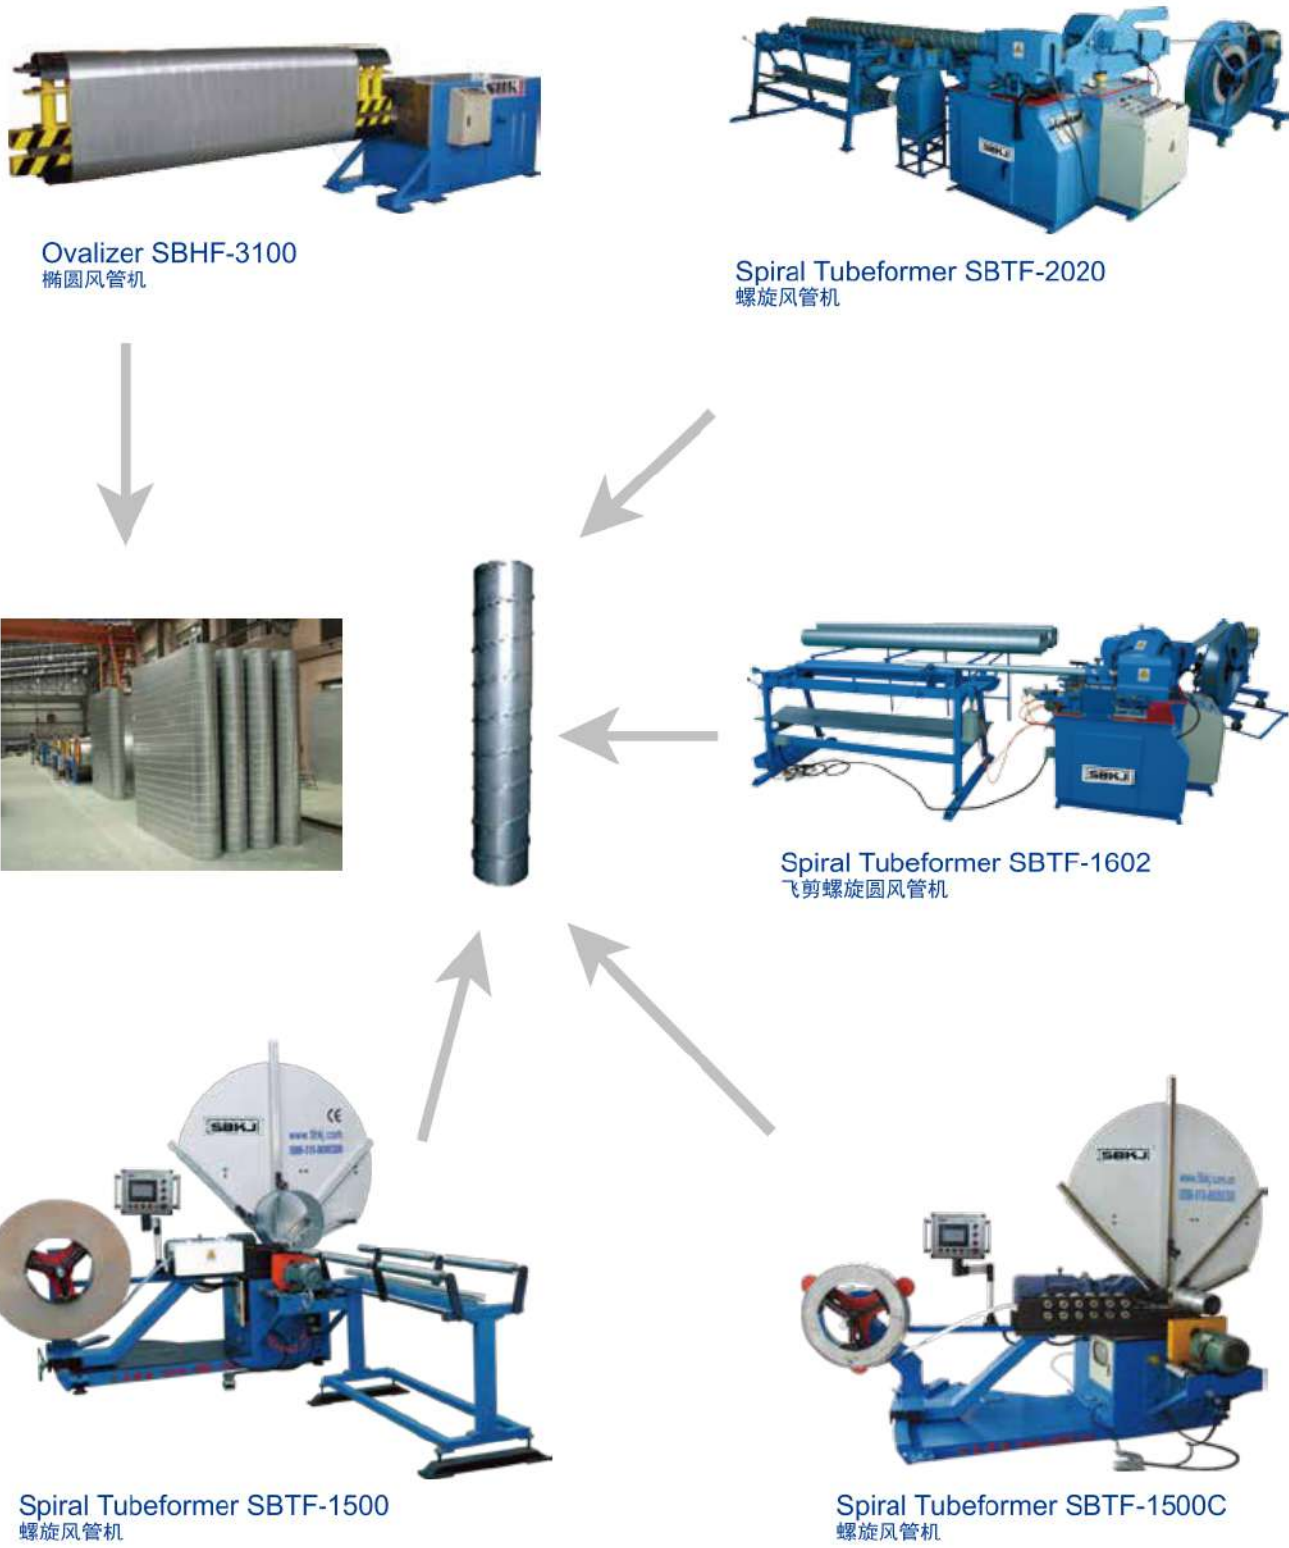

Elbow Forming Flow 圆弯头成型图

NEW TECHNOLOGY ELIMINATES THE TIME CONSUMING SEALING OF BENDS

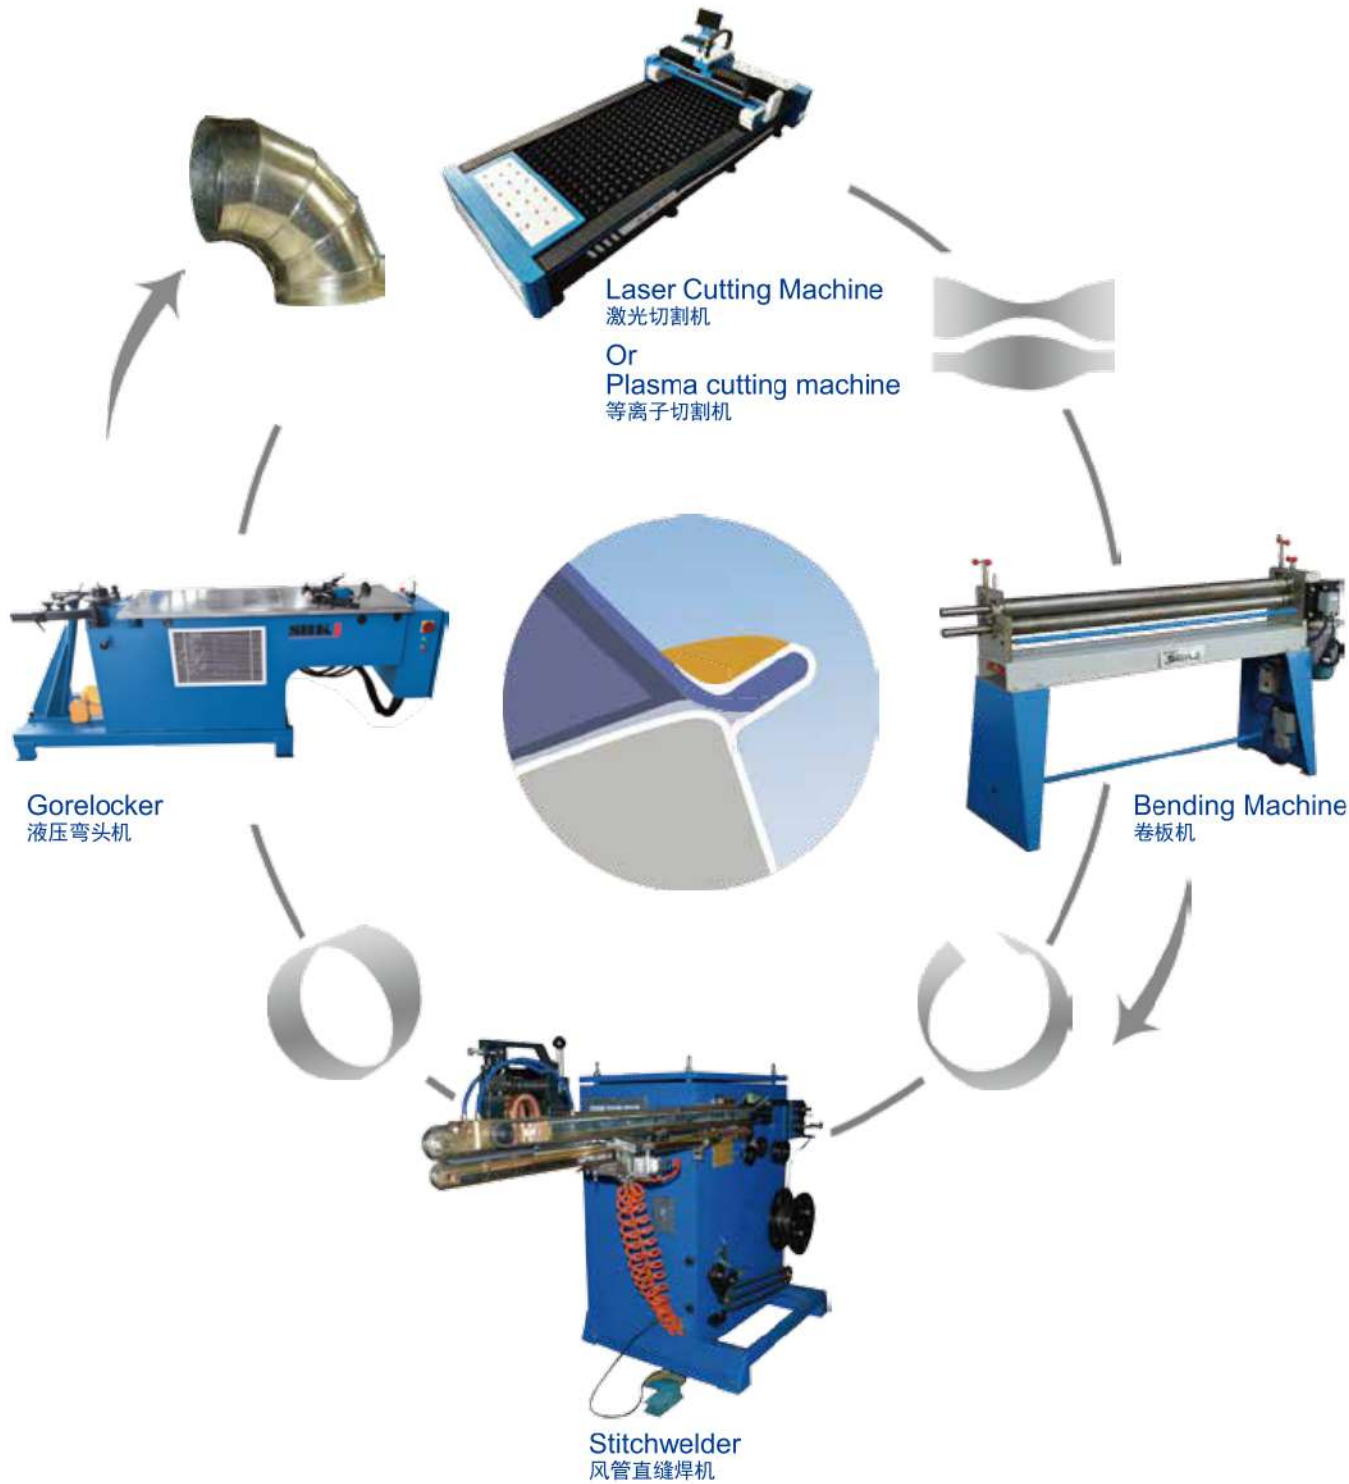

Gorelocker (Hydraulic) SBEM-1250
液压弯头机

Gorelocker (Hydraulic)	
SBEM-1250 (imported)	\$13,050
SBEM-1250H (domestic)	\$10,150
+one-button start add-on	+ \$1,500



Technical Data	
主功率 Power	4Kw + 120W 冷却风扇 (Cooling fan)
液压油 Hydraulic oil	70L
最大成形速度 Max.forming speed	120m/min
直径 Diameter	100-1250mm
材料厚度 Material Thickness	钢 Black steel 0.4-1.5mm 镀锌板 Galvanized steel 0.4-1.5mm 不锈钢 Stainless steel 0.4-1.0mm 铝 Aluminum 0.4-1.5mm
翻边尺寸 Flange size	5mm、 7.5mm、 10mm
重量 Weight	750kg
外形尺寸 Dimension	2650mm×800mm×1000mm
电压 Voltage	380V/50HZ/3PH



Gorelocker(electric)
虾米弯头机

Gorelocker (Electric / Shrimp-body)	
SBWT-1500D (flange+seam VFD)	\$4,200
SBWT-1500A (flange VFD)	\$3,900
SBWT-1000D	\$3,600
SBWT-1000A	\$3,300



Technical Data				
型号 Model	SBWT-1000A 翻边变频调速 Frequency Control (Male/Female)	SBWT-1500A 翻边变频调速 Frequency Control (Male/Female)	SBWT-1000D 翻边、合缝双变频调速 Frequency Control (Male/Female/Seam Lock)	SBWT-1500D 翻边、合缝双变频调速 Frequency Control (Male/Female/Seam Lock)
最大板材厚度 Max Thickness	GI镀锌板 0.4-1.2mm SS304不锈钢 0.4-0.8mm	GI镀锌板 0.4-1.5mm SS304不锈钢 0.4-1.2mm	GI镀锌板 0.4-1.2mm SS304不锈钢 0.4-0.8mm	GI镀锌板 0.4-1.5mm SS304不锈钢 0.4-1.2mm
管径加工范围 Diameter	Φ120-Φ1000	Φ120-Φ1500	Φ120-Φ1000	Φ120-Φ1500
最大成型速度 Max.Forming speed	75r/min	75r/min	75r/min	75r/min
功率 Power	1.5KWx2+2.2KW/1	2.2KWx2+4KW/1	1.5KWx2+2.2KWx2	2.2KWx2+4KWx2
设备重量 Weight	600kg	660kg	600kg	660kg
设备尺寸 Dimension	2080×700×895mm	2450×700×895mm	2080×700×895mm	2450×700×895mm

Fittingshaper SBJQJ-500

胶圈机

Fittingshaper

SBJQJ-500

\$23,450



Technical Data

电源 Voltage	380V/50HZ/3相(可根据客户要求定制) (Can be customized according to customer requirements)
功率 Power	3.5Kw
材料厚度 Thickness	0.4-1.0mm
适用材料 Material	镀锌板、不锈钢板、铝板 Galvanized steel, stainless steel, aluminum
管径 Diameter	φ 80-400
重量 Weight	1500kg

Motor Rotary Machine

SBLX-18 (1.5mm)

\$900

SBLX-15 (1.2mm)

\$800

Motor Rotary Machine

电动辘线机

Technical Data

型号 Model	SBLX-15	SBLX-18	SBLX-20(Hydraulic)
最大板厚 Max. thickness	1.2mm	1.5mm	GI镀锌板: 0.4-1.8mm SS不锈钢:1.2mm
功能 Function	压筋, 翻边 Beading, Flange		
成型速度 Speed	3m/min	3m/min	100m/min
形状尺寸 Forming Shape			
功率 Power	0.75kw	1.5kw	2.2kw
重量 Weight	80kg	130kg	200kg
外形尺寸 Dimension	900mm×380×mm1080mm	910mm×430mm×1090mm	1160x680x1200mm
电压 Voltage	380V/50HZ/3PH		



Aluminum Flexible Duct Formi

(Double Working Stations)

SBLR-600

铝箔软管机



Aluminum Flexible Duct

SBLR-600 (solid glue)

\$14,550

SBRL-200A (double liq.)

\$11,650

SBRL-200 (single liq.)

\$10,200

Technical Data

直径 Diameter	φ80-φ600mm
适用材料 Material	无纺布 Non-woven Fabric, PVC Film, 铝箔 Aluminum Foil
材料厚度 Thickness	0.02-0.08 mm
料宽 Width	φ80mm 35mm
	φ100mm 30-35mm
	φ125mm 30-35mm
	φ300-600mm 35-40mm
进料速度 Feeding Speed	65m/min
切割方式 Cutting system	自动切割 Automatic cutting
主机功率 Power	7 KW
重量 Weight	680kg
外形尺寸 Dimension	2000mm×1500mm×1800mm 主机 (Mainframe)
电压 Voltage	380V/50HZ/3PH

Aluminum Flexible Duct Forming Machine

SBLR-600A

全自动铝箔软管机

Aluminum Flexible Duct (Full-Auto)

SBLR-600A (fully auto)

\$16,050



Technical Data

直径 Diameter	80-600mm
适用材料 Material	铝箔 Aluminum foil
材料厚度 Thickness	0.02-0.08mm
材料宽度 Width	30-60mm
进料速度 Feeding Speed	70m/min
切割方式 Cutting System	自动切割 Automatic cut
功率 Power	主机: 1.5Kw, 烘箱: 7.5Kw, 料架电机: 1.5Kw
电压 Voltage	380V/50HZ/3PH
设备尺寸 Dimension	烘箱尺寸 Drying oven: 1150×1050×1680mm 主机尺寸 Mainframe: 1860×950×1000mm 料架尺寸 Run-out table: 2200×800×1250mm 钢丝放料盘尺寸 Decoiler: 670×680mm
总重量 Weight	980kg

Flexible Duct Insulation Machine

保温棉套管机



Insulation Jacketing
SBTG-600
\$18,950

Technical Data	
套管直径 Diameter	100-600mm
材料厚度 Thickness	0.02-0.08mm
材料宽度 Width	30-60mm
钢丝直径 Diameter of wire	0.8-1.2mm
保温棉厚度 Thickness of insulation cotton	25-100mm
功率 Power	4Kw
电压 Voltage	380V/50Hz/3PH
套管长度 Length of sleeving	0-100000mm
设备尺寸 Dimension	19500×2200×2400mm
重量 Weight	3300Kg

Flexible Duct Shrinking Machine

保温棉缩管打包机



Shrink Wrap Packing
SBDB-500
\$11,650

Technical Data	
套管直径 Diameter	150-500mm
功率 Power	压缩电机1.5Kw/380V，打包机400w/220V
设备尺寸 Dimension	8400×1650×1600mm
重量 Weight	550Kg

Shrink Tube Machine

简易缩管机



Shrink Tube / End-Closer
Shrink tube (.....) \$1,500
End-closer (...) \$900

Canvas Flexible Duct Forming Machine

帆布软管机



Canvas Flexible Duct
SBLR-800F (single) \$10,200
3-layer canvas \$16,050

Technical Data	
型号 Model	SBLR-800F
直径范围 Diameter range	Φ80-800mm
帆布厚度 Thickness of Canvas	0.3-0.6mm(帆布 Canvas)
帆布宽度 Material of Width	60-130mm
钢带宽度 Thickness of Strip	11mm
棉线规格 Cotton thread specifications	3股4根，直径3mm
电机功率 Power	1.5Kw
设备重量 Weight	800Kg
外形尺寸 Dimension	2500×500×1000mm主机 3500×500×1000mm出料架

Aluminum Duct Forming Machine

SBLF-500

铝箔风管机



Aluminum Duct Forming	
SBLF-500 (0.08-0.15mm)	\$9,900
SBLF-600 (SS aluminum)	\$18,950

Technical Data	
卷管直径 Diameter	φ80-φ500mm
铝带厚度 Thickness	0.08-0.15mm
铝带宽度 Width	60mm
波纹 Corrugated	常规6波 Standard 6
进料速度 Feeding speed	0-25m/min
咬合方式 Lock form	双层平纹咬合 Double-decked tabby locking / 斜纹 (Twill)
功率 Power	2Kw
重量 Weight	260kg
外形尺寸 Dimension	2210mm×830mm×1530mm 主机 (Mainframe)
电压 Voltage	380V/50HZ/3PH

Stainless Duct Forming	
SBSS duct former	\$10,200

Stainless Duct Forming Machine

不锈钢风管机



Technical Data	
加工板厚 Thickness	0.05-0.1mm, 不锈钢 Stainless steel
直径 Diameter	Φ100-500mm
功率 Power	主机 2.2Kw, 切割电机1.5Kw
设备尺寸 Dimension	主机 2200×1500×1600mm 出料架 2000×700×980mm
重量 Weight	750Kg

Plasma Cutter

等离子切割机



Plasma Cutter	
SBPC-1500x4000	\$5,250
SBPC-1500x5100	\$5,700


Technical Data		
型号 Model	SBPC1550×4000	SBPC1550×5100
加工范围 Range(L×W)	1550mm×4000mm	1550mm×5000mm
加工板厚 Thickness	0.4-4mm	0.4-4mm
加工速度 Processing Speed	7-8m/min	7-8m/min
总功率 Power	12kw	12kw
重量 Weight	1500Kg	2300Kg
设备尺寸 Dimension	4800mm×1800mm×1200mm	5800mm×1800mm×1200mm
电压 Voltage	380V/50HZ/3PH	

Laser Cutting Machine	
SBLC-4015/1500 (basic main)	\$19,050
SBLC-4015/2000 (full 3-line)	\$34,400
SBLC-4015/3000	\$35,900
SBLC-5015/2000 (0.4-15mm)	\$35,450


Laser Cutting Machine

激光切割机

Technical Data		
型号 Model	SBLC-4015/2000	SBLC-4015/3000
加工范围 Range(L×W)	1500mm×4000mm	1500mm×4000mm
加工板厚 Thickness	0.5-6mm	0.8-8mm
功率 Power	2000w	3000w
设备尺寸 Dimension	5550mm×2400mm×1950mm	5550mm×2400mm×1950mm
重量 Weight	3000Kg	3500Kg

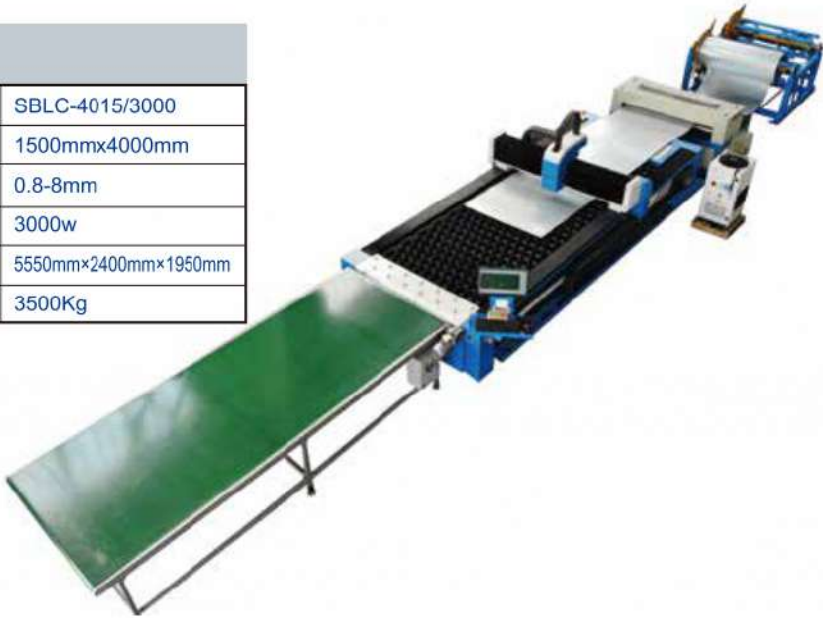

Oval Roller
SBOR-1.2x1500
椭圆卷板机

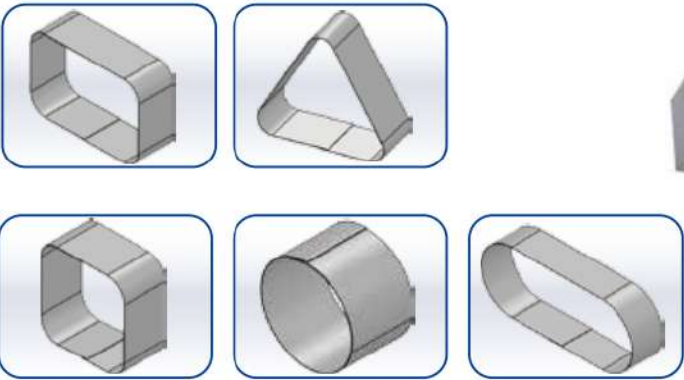

Oval Roller
SBOR-1.2x1500
\$8,700

Technical Data	
最小卷圆直径 Min.diameter	140mm
最大板宽 Max.width	1500mm
加工厚度 Thickness	0.4-1.2mm
功率 Power	3Kw
电压 Voltage	380V/50HZ
重量 Weight	580Kg
外形尺寸 Dimension	2350mm×770mm×1485mm

Hydraulic Rolling (2-roll)
SBJY-1500B
\$12,250

Hydraulic Rolling Machine SBJY-1500B
液压二辊卷圆机

Technical Data	
镀锌板 Galvanised steel	0.8-3.0mm
不锈钢 stainless steel	0. 4-2.0mm
卷板宽度 Width	1500mm
管径范围 Diameter	150-800mm
总功率 Power	8Kw
外形尺寸 Dimension	3450x1650x1250mm
电压 Voltage	380V/50HZ/3PH
重量 Weight	2100Kg



Electrical-driven Bending Mac
电动卷板机




Electrical Bending Machine
SBW11G-1.5x1270
\$1,150
SBW11G-1.2x1530
\$1,200
SBW11G-2x1270
\$1,600
SBW11G-1.8x1530
\$1,800

Technical Data			
型号 Model	SBW11G-2×1020	SBW11G-1.5×1270	SBW11G-1.2×1530
最大卷板厚度 Max.thickness	0.4~2mm	0.4~1.5mm	0.4~1.2mm
最大卷板宽度 Max.Width	1000mm	1250mm	1500mm
板材屈服极限 Yield Limit	245mm	245mm	245mm
最小卷板直径 Min.Diameter	100mm	100mm	100mm
上辊直径 Top roller diameter	73mm	73mm	73mm
下辊直径 Bottom roller diameter	73mm	73mm	73mm
功率 Motor	1.5kw	1.5kw	1.5kw
重量 Weight	220kg	240kg	280kg
外形尺寸 Dimension	1540mm×550mm×1110mm	1780mm×550mm×1110mm	2040mm×550mm×1110mm
电压 Voltage	380V/50HZ/3PH		

Stitchwelder
SBSW-30-2Z (DC, 0.4-1.0mm)
\$17,550

Stitchwelder SBSW-30-2Z
风管直缝焊机

Technical Data	
焊接直径 Diameter	φ100-φ1000mm
焊接长度 Length	50-1000mm
焊缝搭接量 Overlap	6mm
焊板厚度 Thickness	0.4-1.0mm
焊接速度 Welding Speed	2m/min
铜丝直径 Copper Diameter	φ2.0
最大功率 Max.Power	40KW
重量 Weight	850kg
外形尺寸 Dimension	2300mm×800mm×1300mm (主机 Mainframe)
电压 Voltage	380V/50HZ/3PH

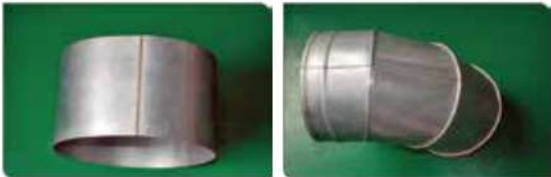

Automatic Stitchwelder SB-ZF

升降式直缝焊机

Technical Data	
加工厚度 Thickness	0.8-3mm
加工长度 Length	100-1500mm
焊接直径 Diameter	φ150-φ1500
外形尺寸 Dimension	2500x1000x2350mm
电压 Voltage	380V/50HZ/3PH



Lifting-type Stitchwelder	
SB-ZF1500 (0.5-4.0mm)	\$9,450

Seamwelder

经济型缝焊机



Economy Seamwelder	
SBFN-35 (0.4-2.0mm)	\$2,800
SBFN-55 (0.4-2.5mm)	\$3,150
SBFN-75 (0.4-3.0mm)	\$3,450
SBFN-100 (0.4-4.0mm)	\$4,200

Technical Data				
型号 Model	SBFN-35	SBFN-55	SBFN-75	SBFN-100
板厚 Thickness	0.4-1.0mm	0.4-1.2mm	0.4-1.5mm	0.4-2.0mm
最大输入容量 Max.input capacity	45KVA	55KVA	75KVA	110KVA
最大短路电流 Max.short circuit current	6200A	11000A	16000A	26000A
最大电极压力 Max.pressure of electrode	400KGF	600KGF	1000KGF	1000KGF
冷却水流量 The flow of cooling water	6L/min	6L/min	8L/min	8L/min
臂伸长度 Arm length	900mm	900mm	600mm	600mm
电极行程 Electrode journey	80mm	80mm	80mm	80mm
焊接速度 Welding speed	0.5-3m/min	0.5-3m/min	0.5-3m/min	0.5-3m/min
重量 Weight	328kg	378kg	428kg	478kg
外形尺寸 Dimension	1800×610×1930mm	1800×610×1930mm	1800×610×1930mm	1800×610×1930mm
电压 Voltage	380V/50HZ/3PH			

Round Flange Forming Machine

圆法兰生产线



Technical Data	
加工厚度 Thickness	碳钢Carbon steel: 2-4mm 304 不锈钢Stainless steel: 2-3mm
最小加工直径 Min.Diameter Range	250mm
角钢规格 Angle iron Specification	20×30mm, 30×30mm, 30×40mm, 30×50mm
放料架 Decoiler	850×850×1250
电机功率 Power	7.5kwx2
设备尺寸 Dimension	4600×1500×1750mm (主机) 900×900×1300mm (料架)
电压 Voltage	380V/50HZ/3PH

Round Flange Forming Line	
SBYFL-50 (2-5mm)	\$19,250
SBYCX-40 (2-4mm)	\$17,500
SBYFL-5005 heavy-duty SS	\$36,900

Round Flange Punching Machine

圆法兰冲孔机



Technical Data	
加工厚度 Thickness	碳钢 Carbon steel: 2-4mm 304不锈钢 Stainless steel: 2mm
加工直径 Diameter	250~1800mm
角钢规格 Angle iron Specification	20×30mm, 30×30mm,30x40mm, 30x50mm
重量 Weight	1500kg
设备尺寸 Dimension	3200mm×1100mm×2000mm
电机功率 Power	7.5kw
电压 Voltage	380V/50HZ/3PH

Round Flange Punching	
SBYFL-50-1 (auto)	\$13,700
SBYCK-40 (2-4mm)	\$11,650
SBYFL-50-2 (manual)	\$3,650
SBYFL-5005-5 heavy	\$22,250

Spotwelder SBDN-40

点焊机

Technical Data	
型号 Model	SBDN-40
输入电压 Input voltage	380V
输入容量 Input capacity	40Kva
负载持续率 Rated load cycle	12%
焊接厚度 Welding thickness	1.2mm+1.2mm
最大压力 Max.pressure of electrode	393N
电极行程 Electrode journey	60mm
重量 Weight	236kg
外形尺寸 Dimension	1100mm×550mm×1700mm
电压 Voltage	380V/50HZ/2PH
功率 Power	40Kva



Elbow Welder

弯头焊机

Technical Data	
电源 Power	380V 50HZ 3PH
焊接直径 Diameter	φ 80 ~ φ 250mm
焊接角度 Angle	45° 90°
焊接厚度 Thickness	冷轧板 Cold rolled steel:0.4-1.0mm
	镀锌板 Galvanized steel:0.4-1.0mm
	不锈钢 Stainless steel:0.4-0.8mm
焊接速度 Welding Speed	3-9m/min
搭接量 Overlap	6mm
焊接铜丝 Copper Diameter	φ2.0~φ2.2mm
冷却水 Cooling Water	0.4Mpa 8.5L/min
压缩空气 Compress Atmosphere	0.8Mpa 600L/min≤20℃
焊接功率 Power of Welding	45KVA (单台 Simplex)
重量 Weight	950Kg
外形尺寸 Dimension	1600mm×1000mm×1600mm (单台 Simplex)



Round Flange Welding Machine

圆法兰碰焊机

Technical Data	
加工厚度 Thickness	2-5mm
电压 Voltage	380V/50HZ/3PH
设备尺寸 Dimension	1000mm×1000mm×2000mm
总重量 Weight	500kg
功率 Power	100Kw
电压 Voltage	380V/50HZ/3PH



Seam Closing Machine

圆管合缝机



Technical Data		
型号 Model	SBHF-1.5×1500	SBHF-1.2×2000
最大加工长度 Max.length	1500mm	2000mm
最大加工厚度 Max.thickness	0.4~1.5mm	0.4~1.5mm
最小加工直径 Min.diameter	φ100mm	φ100mm
电机功率 Power	0.55kw	0.55kw
重量 Weight	410kg	455kg
设备尺寸 Dimension	2690mm×950mm×1600mm	2770mm×780mm×1370mm



Auto Duct Line SBAL-V

全自动风管生产U型五线

Auto Duct Line (5-line, Straight)	
SBAL-V-1250-1.2 (0.4-1.2mm)	\$55,450
SBAL-V-1550-1.2	\$60,250
SBAL-V-1250-1.5 (0.6-1.5mm)	\$61,700
SBAL-V-1550-1.5	\$64,650



功能:

主要完成共板法兰直管和角铁法兰/“C”骨法兰的加工，日加工能力800–2500平米。风管只需输入尺寸，生产线自动完成开卷、校平、压筋、冲角联合咬口、共板法兰成型、角铁法兰/“C”骨法兰成型、折方成型。

FUNTION:

Mainly to complete the straight ducts for TDF flange, angle steel flange and drive cleat forming, the processing capacity is 800-2500 square metersper day. Just enter the sizes of the ducts you need to process, then the auto duct line will complete the uncoiling, leveling, beading, notching and punching.Pittsburgh lock forming, TDF flange forming, angle steel flange forming, drive cleat forming, folding and shaping.

Technical Data									
型号 Model	加工板厚 Thickness	最大加工板宽 Max. width	最大进料速度 Max.feeding speed	料卷最大重量 Max. weight	外形尺寸 Dimension			总功率 Power	重量 Weight
					长 (L)	宽 (W)	高 (H)		
SBAL-V-1250U	0.5-1.5mm	1250mm	18m/min	8T	14500mm	4950mm	1500mm	40Kw	16T
SBAL-V-1550U	0.5-1.5mm	1550mm	18m/min	8T	14500mm	5350mm	1500mm	40Kw	16T

Automatic C-Driven Slip Duct
Work line SBAL-V-1250C

全自动插条生产线（C&S）

Auto Duct Line (5-line, C&S)	
SBAL-V-1250C (C-type insert)	\$56,900
SBAL-V-1250U-1.5 (U-type)	\$60,250
SBAL-V-1250U-2.0 (U-type)	\$67,600
SBAL-V-1550U-2.0	\$70,500



Technical Data	
材料厚度 Thickness	0.4-1.2mm
材料宽度 Width	1250mm
加工速度 Speed	14m/min
设备尺寸 Dimension	3250×2950×1200mm
功率 Power	13Kw

Auto Duct Line SBAL-III


全自动风管生产三线

三本风管生产III线是由两电动上料架、调平压筋机、液压冲尖口和冲方控制部分采用全电脑控制，该控制系统具有闭环反馈系统，生产精度和稳定性明显提高。其最大工作速度为18米/分。长度误差为±0.5mm，对角线误差±0.8mm。本系统可满足单班生产1000m²方型风管能力。

Line III consists of two electrical feeding consists of two electrical feeding metal is controlled by frames,, leveler grooving roller, hydraulic notch and square punching machines, hydraulic shearer and folder. The electrical control system uses a computer with a closed -loop servo-system to increase the precision and reliability of the line. The maximum working speed is 18m/min. The length tolerance is ±0.5mm. The diagonal line tolerance is ±0.8mm. The line is able to product 1000² of rectangular ducts in 8 hours.



Technical Data		
型号 Model	SBAL-III-1250	SBAL-III-1550
加工板厚 Thickness	0.5-2.0mm	0.5-2.0mm
最大加工板宽 Max.width(standard)	1250mm	1550mm
最大进料速度 Max.Feeding speed	18m/min	18m/min
卷料最大重量 Max.weight capacity	8000kg	8000kg
总功率 Power	10.7kw	10.7kw
重量 Weight	3250kg	4000kg
主机尺寸 Mainframe	2300mm×1800mm×1400mm	2300mm×2100mm×1400mm
料架尺寸 Decoiler	2300mm×1750mm×1650mm	2300mm×2050mm×1650mm
电压 Voltage	380V/50HZ/3PH	

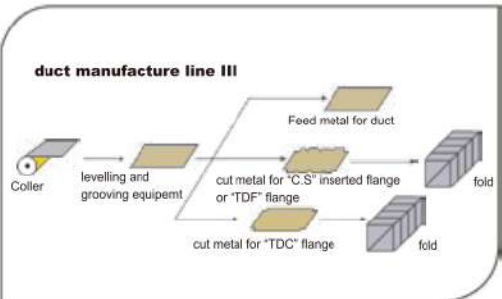

Auto Duct Line (3-line)

SBAL-III-1250-1.2 (0.4-1.2mm)	\$13,750
SBAL-III-1550-1.2	\$15,250
SBAL-III-1250-2.0 (0.6-2.0mm)	\$17,550
SBAL-III-1550-2.0	\$19,050
SBAL-III-1250A-1.5 (Super)	\$25,800
SBAL-III-1550A-1.5 (Super)	\$27,300

Auto Duct Line SBAL-II

全自动风管生产二线



Auto Duct Line (2-line)

SBAL-II-1250-1.2 (0.4-1.2mm)	\$13,200
SBAL-II-1550-1.2	\$14,350
SBAL-II-1250-1.5 (0.4-1.5mm)	\$14,950
SBAL-II-1550-1.5	\$16,100

Technical Data		
型号 Model	SBAL- II -1250	SBAL- II -1550
加工板厚 Thickness	0.5-2.0mm	0.5-2.0mm
最大加工板宽 Max.width(standard)	1250mm	1550mm
最大进料速度 Max.Feeding speed	18m/min	18m/min
卷料最大重量 Max.weight capacity	8000kg	8000kg
总功率 Power	9.2kw	9.2kw
重量 Weight	3000kg	3500kg
主机尺寸 Mainframe	1900mm×1800mm×1400mm	1900mm×2100mm×1400mm
料架尺寸 Decoiler	2300mm×1750mm×1650mm	2300mm×2050mm×1650mm
电压 Voltage	380V/50HZ/3PH	



Duct Zipper (For TDF Duct) SBHF-1
TDF 立式方管合缝机


该设备用于共板方形风管联合角（东洋骨）和直角骨的咬合，是矩形风管生产线的配套设备，合缝机可以不用其它辅助的连接工具，就能准确高质量地结合联合咬口的缝隙，不仅美观大方，而且噪音低，合缝严密、平整、效果良好。

使用方法：将方形风管放到工作平台上，光电开关有感应信号后，上下内锁紧块翻转固定好风管。采用双向合缝的工作方式，一组合缝滚轮在液压马达的驱动下向下行走。通过四道成形轮逐步将联合角弯折成形。到行程位置后，合缝滚轮向上回位，另一组合缝滚轮向上行走完成弯折成形，保证了风管合缝质量。完成合缝后，各滚轮回位，锁紧装置回位，人工取下成品风管。

本机采用台达PLC控制，操作简单，有手动和自动操作，稳定性高，节省安装的人力，大大的提高了生产效率。

The machine can be used with duct forming line, tranverse flange duct machine and lockformer machine.The ideal duct connection incudes united joint and right-angel side. The linking machine work out seam of high quality without help of other auxiliary connecting tool. The process does nothing to hurt the surafce of the work piece with low noise.The finished seam is close ,even and effective . Plates in different thinkness are workable and can be finished quickly and safely.

This machine adopts TEDA PLC to control,with long-time stable working ability,ergonomic design,easy operation and high efficiency.

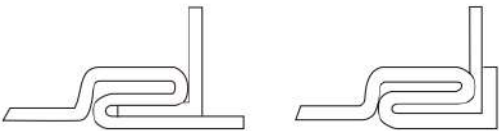

Technical Data						
合缝形势 Closing type	加工板厚 Thickness	加工风管长度 Length	液压电机功率 Power	液压系统压力 Pressure	重量 Weight	外形尺寸 Dimension
双向合缝 Double-sided closing	0.8-1.5mm	1000-1500mm	4kw	10Mpa	718kg	1090mmx960mmx2240mm

Duct Zipper / Seam Closer (round)

SBHF-1.5x1500TDF (vertical)	\$6,250
SBHF-1.5x1500	\$1,950
SBHF-1.5x2000	\$2,250
SBHF-1.2x2500	\$2,600




Seam Closing Machine SBHF-I
方管合缝机(Duct Zipper)

Square Duct Seam Closer

SBHF-I (0.4-1.0mm)	\$11,650
--------------------	----------



DuctZipper		SBHF-I
板厚 Thickness		0.5-1mm
风管最小直径 Min. Duct dia		100c/o100mm
最大工作速度 Max.Feeding Speed		15m/min
支承高度 Support Height		700mm
支承长度 Support Length(Run-in, Run-out)		1500mm
支承臂数量 Number of Support Arms		2×3
加工高度 Working Height		800mm
机械外型 Dimension	长 L(Length)	5350mm
	宽“包括支承臂” W(Support Arms)	1000mm
电机（最大） Max.Power		3KW
重量（最大） Max.Weight		710kg
电压 Voltage		380V/50HZ/3PH

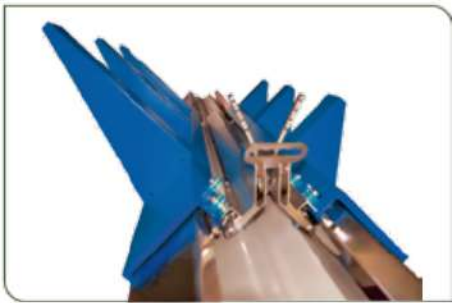

Angle Iron Punching Machine

角钢冲孔机 SBCK-50W（万能模）

Angle Iron Punching	
SBCK-50N (inner chamfer)	\$8,400
SBCK-50WN (inner+outer)	\$9,000
SBCK-50S (dual-servo)	\$8,700
SBJG-50 Angle Flange Line	\$15,600



Technical Data	
加工角钢范围 Angle iron size	∠ 30×30×3mm ~ ∠ 50×50×5mm
最大冲孔直径 Max.dia punching holes	Φ15(5mm、Q235)
冲孔、切断模具 Punching & cutting mould	1套 Set
冲孔速度 Punching speed	1000次/小时 1000/hr
进料速度 Feeding speed	6米/分钟 6m/min
电机功率 Power	11.8Kw
外形尺寸 Dimension	4100mm×1100mm×1300mm
电压 Voltage	380V/50HZ/3PH

- 1.机架整体加工
The frame of the machine is finished in a single piece
- 2.齿条淬火精磨，精准直线导轨
The chain is quenching and with perfect rail
- 3.台湾进口油缸，台湾液压元件
The oil cylinder and Hydraulic component is from Taiwan
- 4.三菱伺服电机，汇川PLC
Servo Motor and plc is Inovance
- 5.自动倒角
Automatical chamfer(45°)



Four Gun Automatic Angle Iron Flange Welding Machine

SB-FS1535L

角铁法兰四枪自动焊机

4-Gun Flange Auto Welder	
SB-FS1535L (standard)	\$18,300
SB-FS1535L-X (auto unload)	\$19,050



Technical Data	
角钢规格 Angle iron specification	3#、4#、5#
角钢范围 Size	200mm×200mm-1500mm×3500mm
加工厚度 Thickness	3.0-5.0mm
主机电压 Mainframe voltage	220V/50HZ
焊机电压 Welding machinery voltage	380V/50HZ
外形尺寸 Dimension	5300mm×2300mm×1400mm
重量 Weight	3000Kg

Hydraulic Corner Binding Machine

液压角码装订机

Hydraulic Corner Binder	
SBCC (0.5-1.2mm)	\$5,400

液压装配角码，快捷、牢固、美观！
液压角码装订机用于矩形方管的角码自动装配。本机操作简单，约6秒钟完成一个角码的装配，完全替代手工装角码。省时、省人工！
Hydraulic Corner bind by Hydraulic,quick,strong,beautiful!
Corner binding machine is mainly used for rectangular square tube to install the corners.Simple operation,instead of manual operation, only 6 seconds can install a corner, Save time, save labour.

Technical Data	
型号 Model	SBCC
加工板厚 Thickness	≤1.5mm
电机功率 Power	4Kw
重量 Weight	280kg
设备尺寸 Dimension	1400mm×800mm×1200mm
电压 Voltage	380V/50HZ/3PH



Transverse Duct Connector Flange Machine

插接式法兰机

Transverse Duct Connector (TDC)	
SBTDC-20A/B (0.8mm)	\$10,600
SBTDC-25A/B (0.8mm)	\$10,900
SBTDC-30A/B (1.0mm)	\$11,050
SBTDC-35A/B (1.2mm)	\$12,500
SBTDC-40A/B (1.0mm)	\$12,800



型号 Model	骨形形状 Rolls Shape	料宽 Strip Width	加工片厚 Thickness	电机功率 Motor	重量 Weight	设备尺寸 Dimension
SBTDC-20A		89mm	0.8mm	3kw	2000kg	2800×600×1150mm
SBTDC-25A		99mm	0.8mm	3kw	2000kg	2800×600×1150mm
SBTDC-30A		121mm	1.0mm	3kw	2200kg	3800×600×1150mm
SBTDC-35A		131mm	1.0mm	3kw	3000kg	3800×600×1200mm
SBTDC-40A		146mm	1.2mm	4kw	3000kg	3800×600×1200mm
SBTDC-20B		86mm	0.8mm	3kw	2000kg	3200×600×1150mm
SBTDC-25B		96mm	0.8mm	3kw	2000kg	3200×600×1150mm
SBTDC-30B		118mm	1.0mm	3kw	2200kg	4500×840×1450mm
SBTDC-35B		128mm	1.0mm	4kw	3000kg	4500×840×1450mm

型号 Model	名称 Name	料宽 Strip Width	加工片厚 Thickness	尺寸 Size	实样 Shape
T-20DC	角码 Duct corner	140mm	2.5mm	a=95mm	
T-30DC	角码 Duct corner	150mm	3mm	a=105mm	
T-40DC	角码 Duct corner	180mm	3.5mm	a=123mm	
T-25DC	角码 Duct corner	110mm	3mm	a=105mm	
T-35DC	角码 Duct corner	150mm	3mm	a=106mm	
DC-10	勾码 Duct clip	35mm	5mm		

Lockformer

咬口机（辘骨机）

Lockformer (key models)	
SBLC-12 (4-func)	\$1,000
SBLC-15-9 (4-f, 9R)	\$1,650
SBLC-12R (5-func)	\$1,300
SBLC-15R-9 (5-f, 9R)	\$1,800
SBLC-15DR-9 (6-f, 9R)	\$1,950
SBHB-1.0 Button-lock	\$2,850



Technical Data					
型号 Model	SBLC-12/15/1.2	SBLC-12R/15R/1.2R	SBLC-12DR/15DR	SBLC-12C/15C	SB-R12/15
板厚 Thickness	0.4-1.2mm	0.4-1.2mm (八辊)	0.4-1.2mm	0.4-1.2mm	0.4-1.2mm
	0.7-1.5mm	0.7-1.5mm (九辊)			
	0.7-1.0 (不锈钢)	0.7-1.0 (不锈钢)	0.7-1.5mm	0.7-1.5mm	0.7-1.5mm
骨型 (成型形状) Shape					
电机功率 Power	1.5/2.2/3	1.5/2.2/3	1.5/2.2	1.5/2.2	1.5/2.2
重量 Weight	210/280/320kg	230/290/350kg	230/300kg	150/163kg	150/163kg
外形尺寸 Dimension	1050×570×770mm 1150×610×800mm 1600×650×1000mm	1050×570×920mm 1150×610×980mm 1600×650×1000mm	1050×570×920mm 1150×610×980mm	840×440×780mm 1040×440×780mm	840×440×780mm 1040×440×780mm
电压 Voltage	380V/50HZ/3PH				

Transverse Duct Flange Forming Machine
共板法兰机

TDF Flange Forming	
SBTDF-12 (0.5-1.2mm)	\$3,450
SBTDF-1.5-16 (0.8-1.5mm)	\$5,050
SBTDF-12SS stainless	\$10,200



Technical Data		
型号 Model	SBTDF-12	SBTDF-1.5-16
加工板厚 Thickness	0.5-1.2mm	0.8-1.5mm
形状 Shape		
电机功率 Motor	2.2kw	4kw
法兰高度 Flange Height	35±0.5mm	35±0.5mm
重量 Weight	760kg	910kg
设备尺寸 Dimension	2540×720×1000mm	2750×750×1000mm
电压 Voltage	380V/50HZ/3PH	

Hydraulic Folding Machine
液压折边机

Hydraulic Folding Machine	
SBWS-2x1500H	\$5,400
SBWS-2x2000H	\$5,700
SBWS-2x2500H	\$6,250
SBWS-3x2500H	\$6,700



Technical Data		
型号 Model	SBWS-1.5×1500H	SBWS-1.2×2000H
加工长度 Length	1550mm	2000mm
加工板厚 Thickness	0.4~2mm	0.4~1.5mm
总功率 Power	5.5kw	4kw
重量 Weight	850kg	1150kg
设备尺寸 Dimension	2070mm×750mm×1050mm	2450mm×750mm×1050mm
电压 Voltage	380V/50HZ/3PH	

Transverse Duct Flange Cleat Cutting Machine
变频卡条切断共板法兰机

TDF Flange Cleat Cutting	
SBTDF-12S (VFD cleat cut)	\$4,350
SBTDF-12LC (···)	\$3,350



Technical Data		
型号 Model	SBTDF-12S	SBTDF-1.5S-16
加工板厚 Thickness	0.5-1.2mm	0.8-1.5mm
功率 Power	3 kw	4kw
设备尺寸 Dimension	2555×720×1000mm	2565×750×1000mm
重量 Weight	850Kg	900Kg

Electrical-driven Shearing Machine
电动剪板机

Electrical / Hydraulic Shearing	
SBQ11-3x1500 electric	\$2,600
SBQ11-4x2500 electric	\$6,250
SBQC12K-4x2000 hydraulic	\$6,400
SBQC12K-4x2500 hydraulic	\$6,700



Technical Data				
型号 Model	SBQ11-2×1300	SBQ11-3×1300	SBQ11-3×1500	SBQ11-4×2000
可剪板厚 Thickness	2mm	3mm	3mm	4mm
可剪板宽 Width	1300mm	1300mm	1500mm	2000mm
剪切角 Cutting Angle	2°25'	2°25'	2°25'	1°30'
行程次数 Stroke No.	20	20	20	20
后档料 Area	350mm	350mm	350mm	500mm
电机功率 Power	3	3	3	5.5
重量 Weight	794kg	1150kg	1800kg	2300kg
设备尺寸 Dimension	1880×960×1120mm	1990×1010×1120mm	2515×1500×1300mm	2650×880×1140mm
电压 Voltage	380V/50HZ/3PH			


Pneumatic Folding Machine
气动折边机



Pneumatic Folding	
SBWS-1.5x1500P	\$1,750
SBWS-1.2x2500P	\$2,200

Technical Data			
型号 Model	SBWS-1.2×1500P	SBWS-1.2×2000P	SBWS-1.2×2500P
最小气摺角度 Min.Angle	90°~180°	90°~180°	90°~180°
板厚 Thickness	0.4~1.5mm	0.4~1.2mm	0.4~1.2mm
重量 Weight	430kg	490kg	550kg
设备尺寸 Dimension	2100mm×650mm×1100mm	2450mm×650mm×1100mm	3100mm×650mm×1100mm
压力 (Pa) Air pressure	0.6 Pa	0.6 Pa	0.6 Pa


Grooving Machine
压筋机

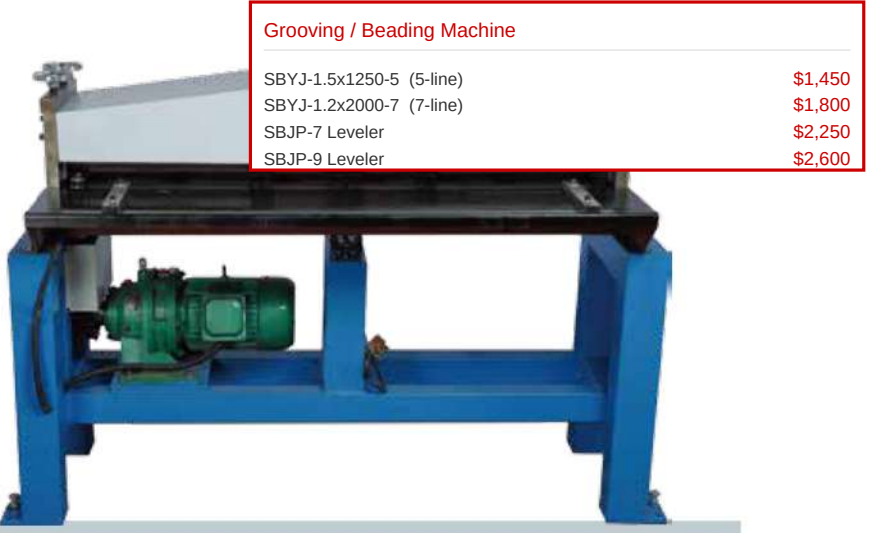

Grooving / Beading Machine	
SBYJ-1.5x1250-5 (5-line)	\$1,450
SBYJ-1.2x2000-7 (7-line)	\$1,800
SBJP-7 Leveler	\$2,250
SBJP-9 Leveler	\$2,600

Technical Data		
型号 Model	SBYJ 1.2×1250-5	SBYJ 1.2×2000-7
最大滚压板厚 Thickness	1.2mm	1.2mm
最大滚压板宽 Width	1250mm	2000mm
功率 Power	1.5kw	2.2kw
重量 Weight	390kg	480kg
设备尺寸 Dimension	1500mm×750mm×1130mm	2550mm×720mm×1130mm
电压 Voltage	380V/50HZ/3PH	

Transverse Duct Flange Hand Folder
共板法兰折边机

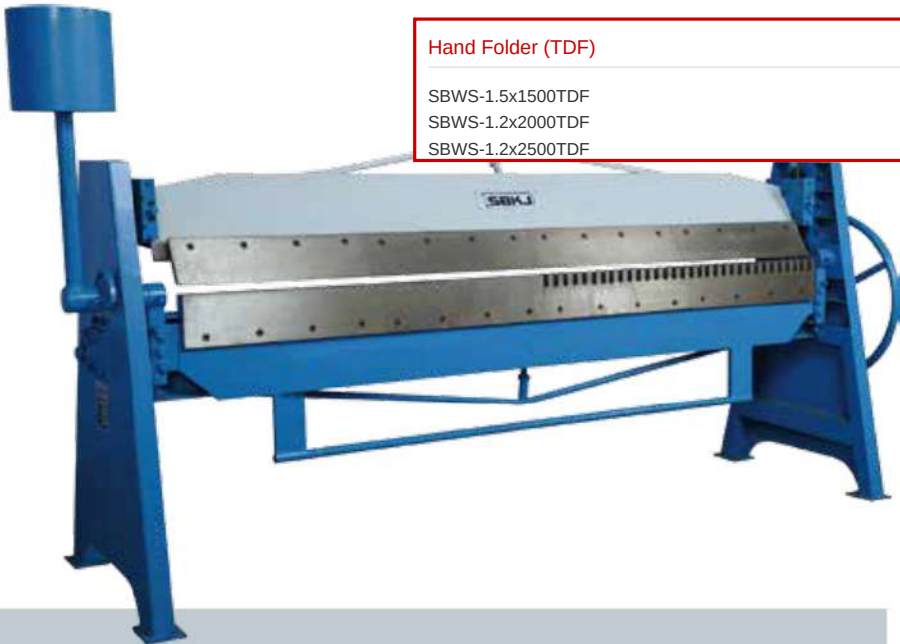

Hand Folder (TDF)	
SBWS-1.5x1500TDF	\$1,150
SBWS-1.2x2000TDF	\$1,450
SBWS-1.2x2500TDF	\$1,650

Technical Data		
型号 Model	SBWS 1.5×1500TDF	SBWS 1.2×2000TDF
最小气摺角度 Min.Angle	90°~180°	90°~180°
板厚 Thickness	0.4~1.5mm	0.4~1.2mm
重量 Weight	318kg	418kg
设备尺寸 Dimension	2070mm×720mm×1400mm	2550mm×720mm×1420mm

Power Slitting and Beading Machine SBLQ-15
辊剪压筋机



Slitting & Beading (bull-head)	
SBLQ-15 (0.5-1.2mm)	\$1,000

Technical Data	
电机功率 Motor	1.5kw
规格 Specifications	1.2×600mm
板厚 Thickness	0.4-1.2mm
剪板宽度 Width	≥30mm
重量 Weight	240kg
设备尺寸 Dimension	1170mm×600mm×910mm
电压 Voltage	380V/50HZ/3PH

Run Out Table
放料架

Technical Data	
涨内孔 Inner diameter of coil	φ480-φ620mm
料宽 Width	≤1250mm
载重 Weight Capacity	≤8T
电机功率 Power	2.2Kw
料架重 Weight	980kg
设备尺寸 Dimension	2200mm×1900mm×1400mm
电压 Voltage	380V/50HZ/3PH



Decoiler / Run-out Rack	
SBFL-1250 (2-core powered)	\$2,300
SBFL-1550 (2-core powered)	\$2,750
SBFL-1250A (single unpow.)	\$1,050
SBFL-1250B (single powered)	\$1,300
SBLP-1250 Tray	\$800


Flexible Duct Connector Machine
软连接成型机



Flexible Duct Connector Line	
SBRJ-110A standard	\$20,450
SBRJ-110B (pointed square)	\$21,450
SBRJ-110C (+screw hole)	\$22,200
SBRJ-110D dual-line	\$28,100

Technical Data	
加工板厚 Thickness of the Galvanized sheet	0.4-0.6mm
加工板宽 Width of the Galvanized sheet	50-130mm
布耗材范围 Consumption range of cloth	两边各12mm左右
铁皮耗材范围 Consumption range of galvanized sheet	两边各20mm左右
防火布宽度 Width of the Fireproof cloth	80-630mm
最终成品宽度 Width of the final product	120-750mm
成型速度 Feeding speed	0-8m/min
总功率 Power	10Kw
设备尺寸 Dimension	主机：3400×1800×1550mm 放料架：1100×1100×1100mm 收料架：1100×750×1100mm
重量 Weight	3600Kg

Auto Corner Making Machine
角码生产线

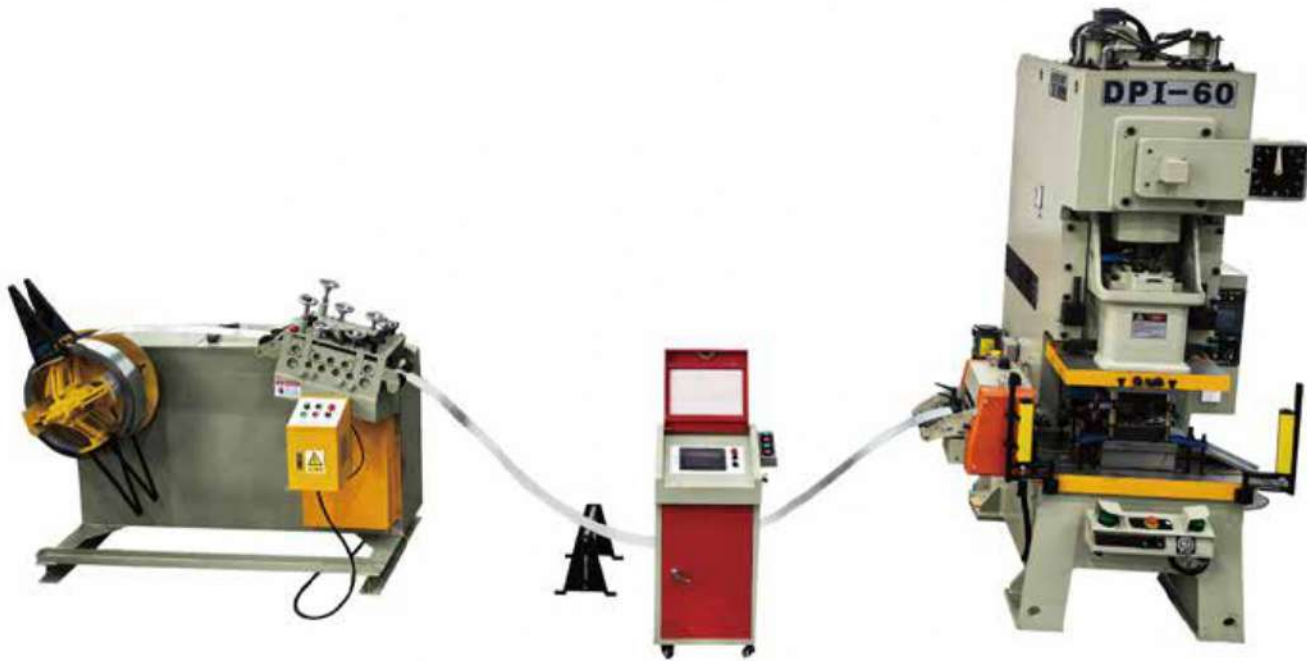

Auto Corner Making Line	
Premium (45T press, PLC)	\$27,800
Basic (JB-series 40T)	\$14,550

Technical Data	
冲载力 Blanking force	45千牛
加工速度 Speed	40-120/min
模具 Model	料宽Width: 96或104mm
	厚度Thickness : 0.8-1.0mm
	1.0-1.2mm
	(二选一/可定制)
料架 Decoiler	承载力1000Kg, 伺服电机自动传料控制
功率 Power	5.5 Kw/变频系统4.5Kw
压缩空气 Air compression	≈0.6 Mpa

Corner Mold
角码模具


Corner Molds (+¥1,000 packing)	
T12 TDF Mold (0.6-1.2mm)	\$1,150
T15 TDF Mold (0.8-1.5mm)	\$1,300
T-DC series (TDC, 1.8-2.5)	\$1,450
DC-10 Hook Mold (2-3mm)	\$1,600



插接角码连续模具
TDC Duct Corner



风阀角码连续模具
Air Valve Duct Corner

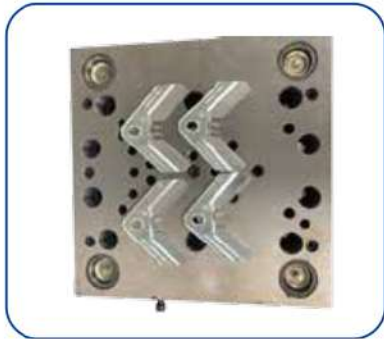


风管共板角码连续模具
TDF Duct Corner



风管加固垫片连续模具
Gasket For Fixing Duct



复合风管角码连续模具
Composite Duct Corner

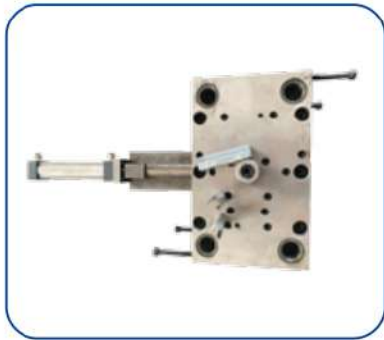

共板卡条连续模具
TDF Cleat



勾码连续模具
TDC Clamp



墙板固定卡连续模具
Wall Panel Clip

Composite Board Cutting Mac
复合板切割机

Composite Board Cutting	Quote on request
CNC composite cutter	

Technical Data	
加工板材尺寸 Material size	长Length 4000 × 宽Width1300mm
功率 Power	28Kw
电压 Voltage	380V/50Hz
外形尺寸 Dimension	5000×2350×2050mm



Cleat Cutting Machine SBKT-1
勾码卡条切断机

Cleat Cutting Machine	
SBKT-12 (cleat shear)	\$850

Technical Data	
加工板厚 Thickness	≤1.5mm
功率 Power	1.5Kw
设备尺寸 Dimension	550×550×1150
重量 Weight	100Kg



Slitting Machine

分条机

Technical Data	
加工板厚 Thickness	0.4-1.2mm
加工板宽 Width	1550mm
重量 Weight	500Kg



Auto Metal Sheet Hoop Machine

管道卡箍成型机



Technical Data		
厚度 (mm) Thickness of Strip	1. 5-4. 0mm (镀锌钢板) Galvanised steel	1. 5-3. 0mm (不锈钢板) stainless steel
宽度 (mm) Width of Strip	20-50	
直径范围 (mm) Diameter Range	80-500	
送料速度 (m/min) Feeding Speed	80	
主机外形尺寸 (mm) Dimension	2200X1400X1800	
重量 Weight	1600	

Hydraulic Riveting Machine

液压铆钉机

Hydraulic Riveting

Handheld hyd. riveting

\$1,500

Technical Data	
角钢规格 Angle iron Specification	40×40×4 mm 50×50×5mm
铆钉尺寸 Rivet size	Φ4×10 Φ5×10
功率 Power	1.5Kw
外形尺寸 Dimension	510×320×695mm
重量 Weight	68Kg

Handheld Laser Welding Machine

手持激光焊机

Handheld Laser Welding

Fiber laser hand welder

\$7,150

Technical Data	
供电电压 Power Supply Voltage	220V±10% AC 50/60Hz
安放环境 Installation Environment	平整、无振动和冲击 Flat surface, free of vibration and shock
工作环境温度 (° C) Operating Temperature	10-40
工作环境湿度 (%) Operating Humidity	<70
冷却方式 Cooling Method	水冷 Water cooling
适用波长 Applicable Wavelength	1064nm (±10nm)
适用功率 Applicable Power	≤200w
准直 Collimation	D20×5/F60

Seam Closing Machine F1275-
电动合缝机

Portable Seam Closer
F1275-PRO handheld
\$1,100

Technical Data	
加工板厚 Thickness	0.75-1.25mm
直径 Diameter	≥300mm
速度 Speed	4-7m/min
重量 Weight	6.6Kg



Medium Frequency Welding I
中频焊机

Medium Frequency Welder
MF pedestal welder
\$7,150

Technical Data	
加工板厚 Thickness	Stainless steel 不锈钢0.4-3.0mm
	Carbon steel 碳钢0.4-3.0mm
	Aluminum 铝0.4-2.5mm
	Galvanized steel 镀锌板0.4-2.0mm
电压 Voltage	380V/50Hz
外形尺寸 Dimension	1400×800×1800mm



Nail-free Riveting Machine F350
无钉铆接机

Handheld Nail-free Riveting
F350 handheld
\$1,600

Technical Data	
材料总厚度 Thickness	0.8-3.5mm
卷边材料的最大折边凸高度 Max.height of flange with flanged material	36mm
冲程频率 Stroke cycle	2/秒
设备尺寸 Dimension	2200×1500×1600mm
重量 Weight	8.3Kg



Snail Seam Closing Machine
SBWKHFJ-45
蜗壳合缝机

Snail / Volute Seam Closer
SBWKHFJ-45 (0.75-1.0mm)
\$3,350

Technical Data	
加工板厚 Thickness	Galvanized steel 镀锌板 0.75-1.0mm
加工范围 Processing scope	2系列 25# (431x472x172)
	28# (472x517x187)
	3系列 31# (519x571x209)
	35# (579x643x235)
	4系列 40# (645x725x266)
	45# (729x814x289)
重量 Weight	800Kg
外形尺寸 Dimension	1100×1100×1800mm



SBKJ Forming Heads
模具




Moulds (per pc, +¥1,000 packing each)	
Al Ø 80-200	\$450
Al Ø 600-800	\$750
Al Ø 1000-1250	\$1,050
Al Ø 1500	\$1,600
Fe Ø 1000-1250	\$700
Fe Ø 2000-2500	\$900

序号 No.	尺寸规格 Size	序号 No.	尺寸规格 Size	序号 No.	尺寸规格 Size
1	φ80	20	φ300	39	φ710(28")
2	φ90	21	φ315	40	φ750
3	φ100	22	φ330(13")	41	φ800
4	φ110	23	φ350	42	φ850
5	φ125	24	φ355(14")	43	φ864(34")
6	φ130	25	φ380	44	φ900
7	φ140	26	φ400	45	φ950
8	φ150	27	φ420	46	φ965(38")
9	φ155	28	φ432(17")	47	φ1000
10	φ160	29	φ450	48	φ1050
11	φ180	30	φ483(19")	49	φ1067(42")
12	φ190	31	φ500	50	φ1100
13	φ200	32	φ550	51	φ1120(44")
14	φ210	33	φ560(22")	52	φ1150
15	φ220	34	φ600	53	φ1168(46")
16	φ230(9")	35	φ610(24")	54	φ1200
17	φ250	36	φ630	55	φ1219(48")
18	φ255(10")	37	φ650	56	φ1250
19	φ280	38	φ700		



方形风管制作应用实例
Application in duct making

- 1、压筋 Grooving
- 2、共板法兰 TDF Flang
- 3、“C”型插条连接 “C”Locking Seam
- 4、单、双骨联接 Single and Double Hem Locknection
- 5、插接法兰 TDC Flang
- 6、勾码 Clip
- 7、东洋骨、单骨角接 Pittsburgh Lock Single Lock
- 8、按扣骨拼接 Snap Lock
- 9、弯头 Elbow Lock
- 10、S骨接接 “ ”locking seam
- 11、TDC角码 TDC corner
- 12、角码连接 Corner connecting


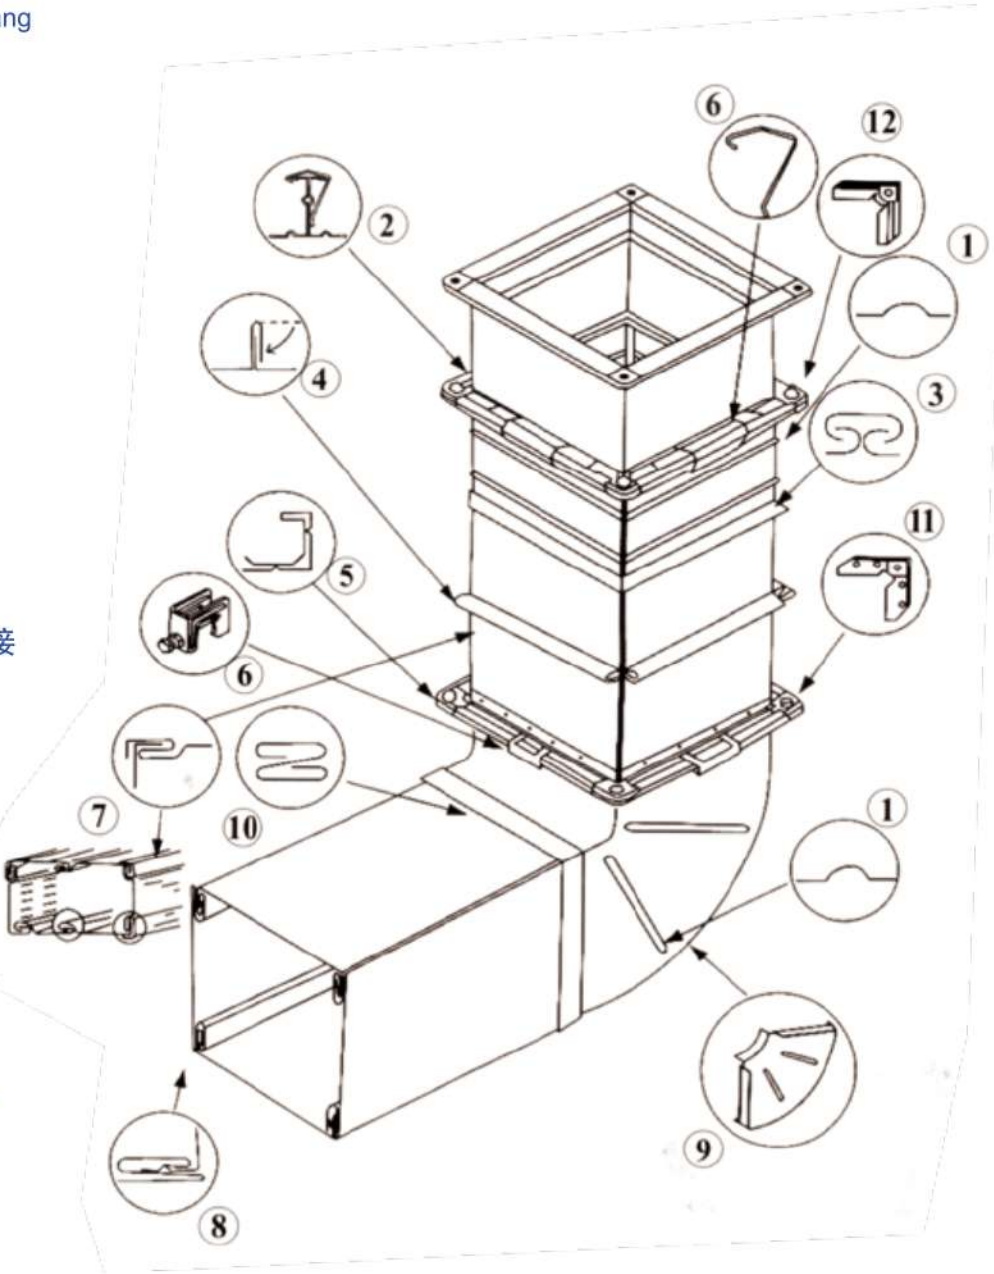


Method of Connecting Duct 连接系列

三合一法兰(抱箍) Hooping connect

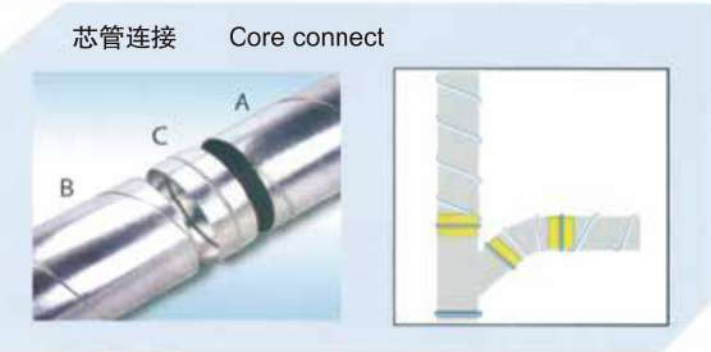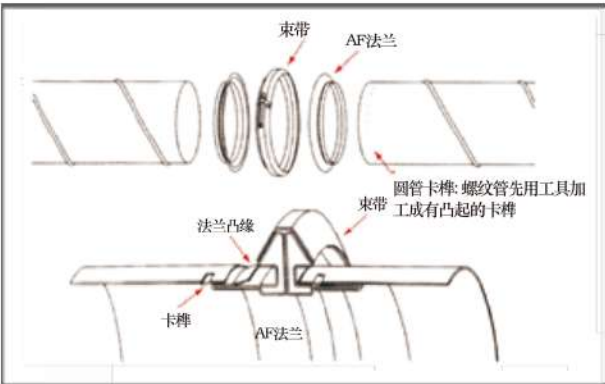

束带连接 Loincloth connect

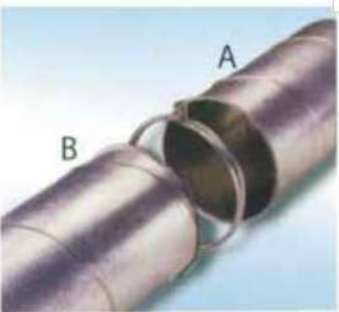

Honor Certificate 企业证书



Patent 专利

