

TEST REPORT

of

**EN 55032 / CISPR 32 / BS EN 55032
AS/NZS CISPR 32 Class B
EN 55035 / CISPR 35 / BS EN 55035 IMMUNITY
EN IEC 61000-3-2 / BS EN IEC 61000-3-2
EN 61000-3-3 / BS EN 61000-3-3**

Product: **PCIe Gen3 E15 2280 256GB~2TB**
Main Model: **DP700PSSD-256GB**
Series Model: **DP700PSSD-512GB; DP700PSSD-1TB;
DP700PSSD-2TB**
Brand: **DATO**
Applicant: **DATOTEK INTERNATIONAL Co., Ltd.**
Address: **No. 34, Alley 18, Lane 478, Rueiguang Rd.,
Neihu District, Taipei, Taiwan**

Test Performed by:



International Standards Laboratory Corp. LT Lab.

TEL: +886-3-263-8888 FAX: +886-3-263-8899

No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan

Report No.: **ISL-21LE801CE35-MD**
Issue Date : **April 2, 2025**



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein. According to customer agreement, the laboratory issues test reports based on the regulations or standards specifications, the measurement uncertainty is not considered in conformity decision rules. This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.


Contents of Report

1.	General.....	1
1.1	Certification of Accuracy of Test Data.....	1
1.2	Test Standards.....	2
1.3	Description of EUT	5
1.4	Description of Support Equipment	6
1.5	Software for Controlling Support Unit.....	6
1.6	I/O Cable Condition of EUT and Support Units	7
2.	Power Main Port Conducted Emissions	8
2.1	Test Setup and Procedure	8
2.2	Conduction Test Data: Configuration 1.....	10
2.3	Test Setup Photo.....	12
3.	Telecommunication Port Conducted Emissions	14
3.1	Test Setup and Procedure	14
4.	Radiated Disturbance Emissions.....	16
4.1	Test Setup and Procedure	16
4.2	Limit	18
4.3	Radiation Test Data: Configuration 1.....	20
4.4	Test Setup Photo.....	26
5.	Voltage Disturbance Emissions at Antenna Terminals	28
5.1	Test Setup and Procedure	28
6.	Differential Voltage Emissions.....	30
6.1	Test Setup and Procedure	30
7.	Outdoor units of home satellite receiving systems	32
7.1	Test Setup and Procedure	32
8.	Electrostatic discharge (ESD) immunity	34
8.1	Test Specification and Setup	34
8.2	Test Point.....	35
8.3	Test Setup Photo.....	36
9.	Radio-Frequency, Electromagnetic Field immunity.....	37
9.1	Test Specification and Setup	37
9.2	Test Setup Photo.....	38
10.	Electrical Fast transients/burst immunity.....	39
10.1	Test Specification and Setup	39
10.2	Test Setup Photo.....	41
11.	Surge Immunity	42
11.1	Test Specification and Setup	42
11.2	Test Setup Photo.....	43
12.	Immunity to Conductive Disturbance.....	44
12.1	Test Specification and Setup	44
12.2	Test Setup Photo.....	45
13.	Power Frequency Magnetic Field immunity.....	46
13.1	Test Specification and Setup	46
13.2	Test Setup Photo.....	47
14.	Voltage Dips, Short Interruption and Voltage Variation immunity	48
14.1	Test Specification and Setup	48
14.2	Test Setup Photo.....	49
15.	Harmonics	50
15.1	Test Specification and Setup	50
16.	Voltage Fluctuations	52

16.1	Test Specification and Setup	52
16.2	Test Data: Configuration	53
16.3	Test Setup Photo.....	54
17.	Appendix.....	55
17.1	Appendix A: Test Equipment.....	55
17.2	Appendix B: Uncertainty of Measurement	58
17.3	Appendix C: Photographs of EUT	60

1. General

1.1 Certification of Accuracy of Test Data

Standards:	Please refer to 1.2
Equipment Tested:	PCIe Gen3 E15 2280 256GB~2TB
Main Model:	DP700PSSD-256GB
Series Model:	DP700PSSD-512GB; DP700PSSD-1TB; DP700PSSD-2TB
Brand:	DATO
Applicant:	DATOTEK INTERNATIONAL Co., Ltd.
Sample received Date:	October 14, 2021
Final test Date:	EMI: refer to the date of test data EMS: October 21, 2021
Test Site:	Chamber 12; Chamber 14; Conduction 04; Immunity02
Test Distance:	10m; 3m (above 1GHz) (EMI test)
Temperature:	refer to each site test data
Humidity:	refer to each site test data
Atmospheric Pressure:	86 kPa to 106 kPa
Input power:	Conduction input power: AC 230 V / 50 Hz Radiation input power: AC 230 V / 50 Hz Immunity input power: AC 230 V / 50 Hz
Test Result:	PASS
Report Engineer:	Jayla Lu
Test Engineer:	 Jovi Liu
Approved By:	 Angus Chu / Sr. Manager

1.2 Test Standards

The tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp. in accordance with the following

EN 55032:2015+A11:2020 and CISPR 32:2015+A1:2019 and BS EN 55032:2015+A11:2020
Class B Electromagnetic compatibility of multimedia equipment - Emission requirements.
AS/NZS CISPR 32:2015+A1:2020 Class B Electromagnetic compatibility of multimedia
equipment- Emission requirements

Performed Item	Test Performed	Deviation	Result
Conducted emissions from the AC mains power ports	Yes	No	PASS
Telecommunication Port Conducted Emissions (asymmetric mode)	N/A	N/A	N/A
Radiated emissions at frequencies below 1 GHz	Yes	No	PASS
Radiated emissions at frequencies above 1 GHz	Yes	No	PASS
Radiated emissions from FM receivers	N/A	N/A	N/A
Voltage Disturbance Emissions at Antenna Terminals	N/A	N/A	N/A
Differential voltage emissions	N/A	N/A	N/A
Outdoor units of home satellite receiving systems	N/A	N/A	N/A

EN 55035:2017+A11:2020 and CISPR 35:2016 modified and BS EN 55035: 2017+A11:2020
Electromagnetic compatibility of multimedia equipment - Immunity requirements.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008 BS EN 61000-4-2:2009	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010 BS EN 61000-4-3:2006+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4:2012 IEC 61000-4-4:2012 BS EN 61000-4-4:2012	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5:2014+A1:2017 IEC 61000-4-5:2014+A1:2017 BS EN 61000-4-5:2014+A1:2017	Surge	Pass	B
EN 61000-4-6:2014+AC:2015 IEC 61000-4-6:2013 BS EN 61000-4-6:2014	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009 BS EN 61000-4-8:2010	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11:2004+A1:2017 IEC 61000-4-11:2004+A1:2017 BS EN 61000-4-11:2004+A1:2017	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 cycle	Pass	B
	30% in 25 cycle	Pass	C
	>95% in 250 cycle	Pass	C

Standard	Description	Results
EN IEC 61000-3-2:2019 IEC 61000-3-2:2018 BS EN IEC 61000-3-2:2019	Limits for harmonics current emissions	Pass
EN 61000-3-3:2013+A1:2019 IEC 61000-3-3:2013+A1:2017 BS EN 61000-3-3:2013+A1:2019	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

1.2.1 Performance Criteria for Compliance: EN 55035 and BS EN 55035

Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

1.3 Description of EUT

EUT

This report test data using the report number ISL-21LE801CE35

Product Name	PCIe Gen3 E15 2280 256GB~2TB
Condition	Pre-Production
Main Model	DP700PSSD-256GB
Series Model	DP700PSSD-512GB; DP700PSSD-1TB; DP700PSSD-2TB
Serial Number	N/A
Control IC	PS5015_E15T
PCB Number	Q020019WF004403E
Memory Capacity	1GB~2TB
Power	From Personal Computer Supply
Highest working frequency	8GHz

The memory capacities listed below is chosen by the applicant to be the representative configuration for testing in this report.

Test Configuration:

Configuration	Control IC	PCB Number	Memory Capacity
1	PS5015_E15T	Q020019WF004403E	2TB

Different Model list:

Model	Market
DP700PSSD-256GB; DP700PSSD-512GB; DP700PSSD-1TB; DP700PSSD-2TB	Different customer

EMI Noise Source:

refer to the photo	Crystal	Point
EUT-4	30MHz	Y1

EMI Solution:

N/A

1.4 Description of Support Equipment

No	Unit	Model / Serial No.	Brand	Power Cord	FCC ID
1	LCD Monitor	U2412M S/N: N/A	DELL	Non-shielded	FCC DOC
2	PS/2 Keyboard	Y-S0002 S/N: N/A	Logitech	N/A	FCC DOC
3	PS/2 Mouse	M-SBM96B S/N: N/A	Logitech	N/A	FCC DOC
4	Printer	C930 S/N: N/A	HP	Non-shielded	FCC DOC
5	Modem	DM1414 S/N: N/A	Aceex	Non-shielded	FCC DOC
6	Personal Computer	HP ProDesk 400 G3 MT S/N: N/A	HP	Non-shielded	FCC DOC

1.5 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:


1. PC running Winthrax.exe to read and write the EUT.
2. Send signal to the Printer through PC USB Port.
3. Send signal to the Modem through PC Serial Port.
4. Send Color Bar to the LCD Monitor through PC D-SUB Port.
5. Repeat the above steps.

	Filename	Issued Date
EUT	Winthrax.exe	06/14/2005
LCD Monitor	Media Player.exe	11/04/2009
Printer	IntelEMC	04/11/2007
Modem	IntelEMC	04/11/2007

1.6 I/O Cable Condition of EUT and Support Units

Description	Path	Length	Shielding	Core	Remark
AC Power Cable	100V (~240V) to PC SPS	1.8m	No	No	
Monitor Cable	Monitor D-SUB Port to PC D-SUB Port	1.8m	Yes	Yes	
Keyboard Cable	PS/2 Keyboard to PC PS/2 Port	1.8m	Yes	No	
Mouse Cable	PS/2 Mouse to PC PS/2 Port	1.8m	Yes	No	
Printer Cable	Printer to PC USB Port	1.8m	Yes	No	
Modem Cable	Modem to PC Serial Port	1.8m	Yes	No	

2.1.1 Test Setup

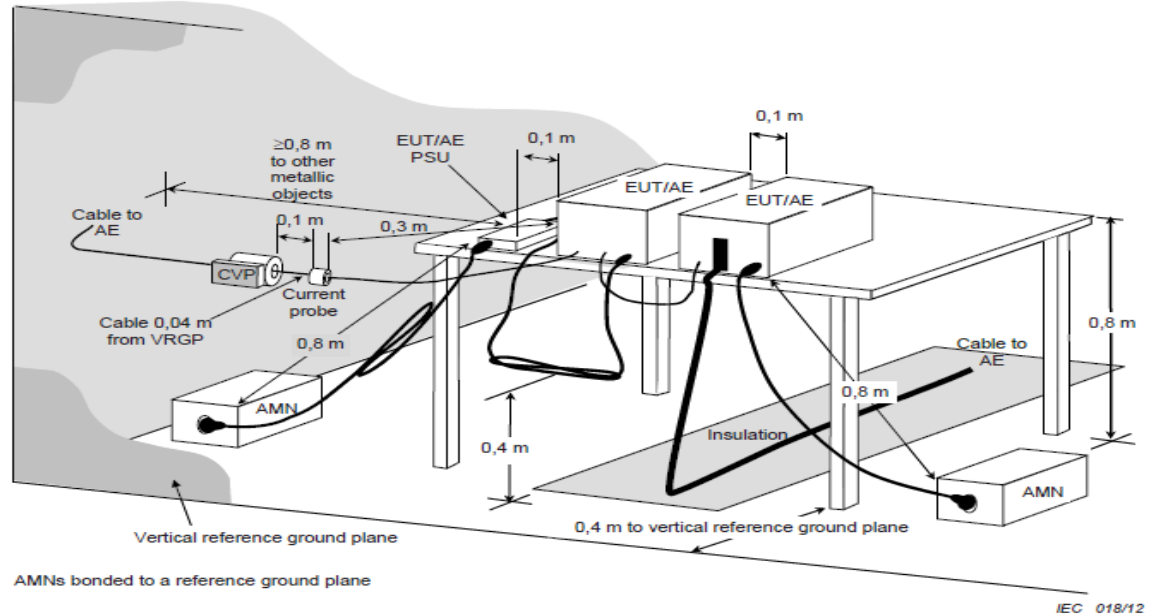

Frequency Range: 150kHz--30MHz
 Detector Function: Quasi-Peak / Average Mode
 Resolution Bandwidth: 9kHz

2.1.4 Limit

Conducted emissions from the AC mains power ports of Class_A equipment:


Frequency	QP	AV
MHz	dB(μ V)	dB(μ V)
0.15-0.50	79	66
0.50-30	73	60
Note: The lower limit shall apply at the transition frequencies		

Conducted emissions from the AC mains power ports of Class_B equipment:

Frequency	QP	AV
MHz	dB(μ V)	dB(μ V)
0.15-0.50	66-56	56-46
0.50-5.0	56	46
5.0-30	60	50
Note: The lower limit shall apply at the transition frequencies		

2.2 Conduction Test Data: Configuration 1

-Live

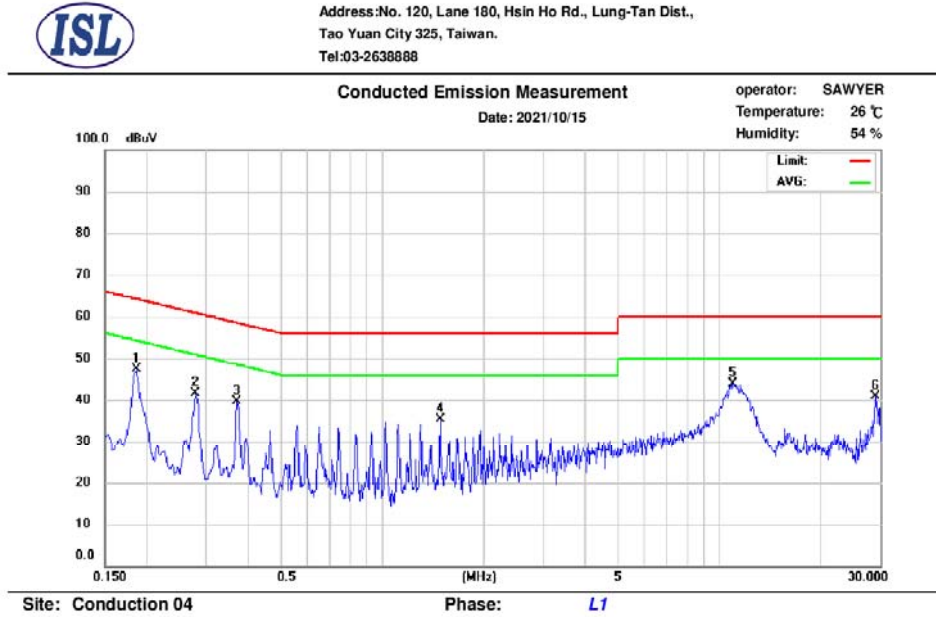

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.186	37.89	35.87	9.65	47.54	64.21	-16.67	45.52	54.21	-8.69
2	0.278	32.66	31.06	9.66	42.32	60.88	-18.56	40.72	50.88	-10.16
3	0.370	28.97	27.58	9.67	38.64	58.50	-19.86	37.25	48.50	-11.25
4	1.486	23.50	22.08	9.70	33.20	56.00	-22.80	31.78	46.00	-14.22
5	10.978	30.38	22.91	9.95	40.33	60.00	-19.67	32.86	50.00	-17.14
6	29.146	23.23	16.39	10.08	33.31	60.00	-26.69	26.47	50.00	-23.53

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor


Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

- Neutral

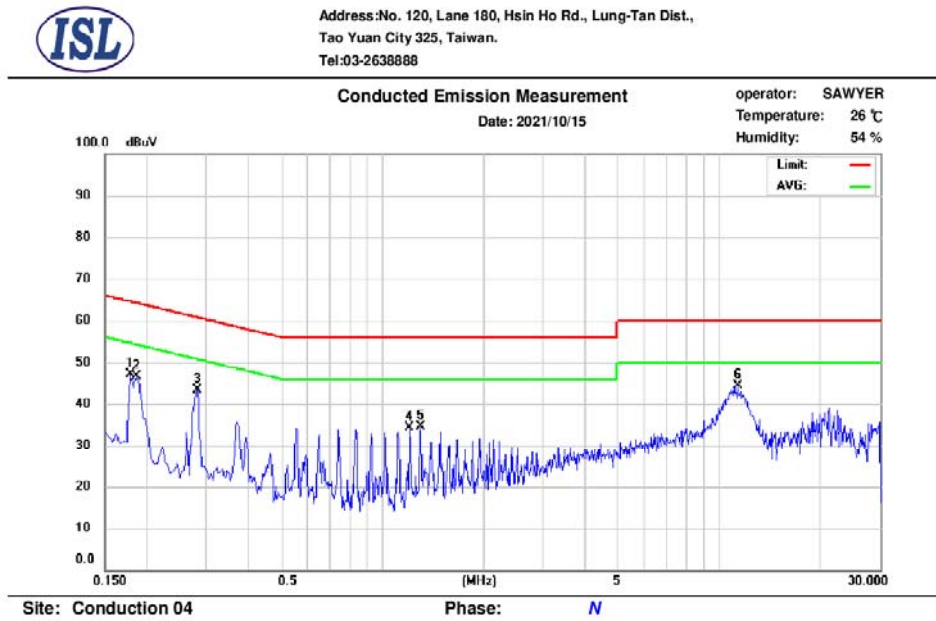

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.178	29.69	21.91	9.64	39.33	64.58	-25.25	31.55	54.58	-23.03
2	0.186	38.94	36.80	9.64	48.58	64.21	-15.63	46.44	54.21	-7.77
3	0.282	29.00	26.76	9.65	38.65	60.76	-22.11	36.41	50.76	-14.35
4	1.206	23.21	22.11	9.68	32.89	56.00	-23.11	31.79	46.00	-14.21
5	1.298	24.16	23.33	9.69	33.85	56.00	-22.15	33.02	46.00	-12.98
6	11.334	30.49	22.66	9.98	40.47	60.00	-19.53	32.64	50.00	-17.36

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor

Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

2.3 Test Setup Photo


Front View



Back View



3.1.1 Test Setup

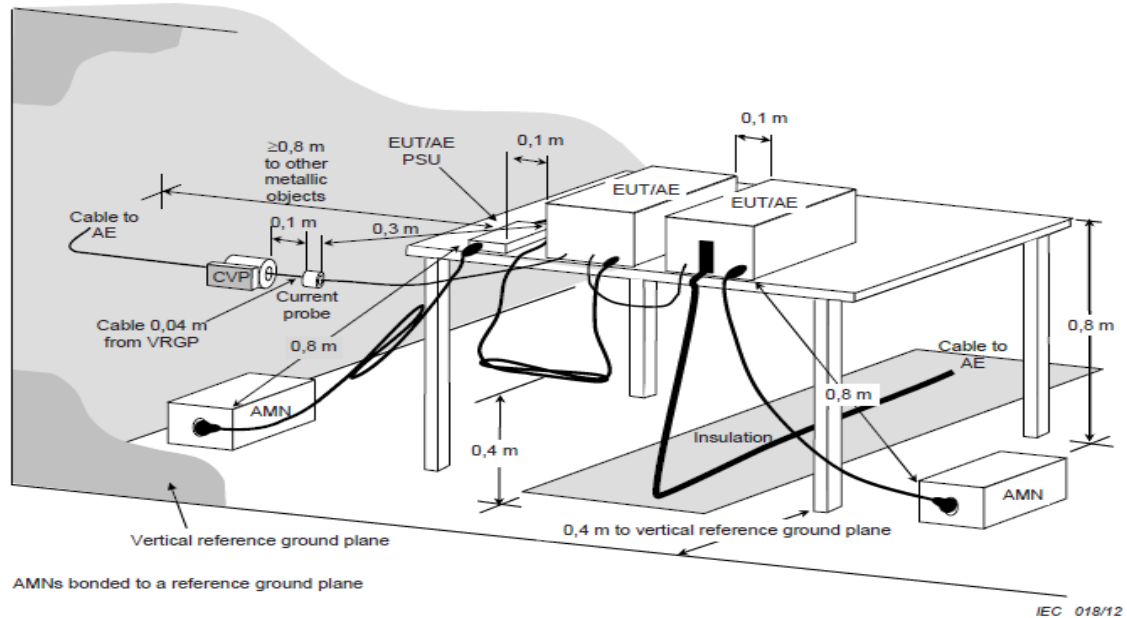

3.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 150kHz--30MHz
 Detector Function: Quasi-Peak / Average Mode
 Resolution Bandwidth: 9kHz

3.1.4 Limit

Asymmetric mode conducted emissions from Class_A equipment:

Applicable to

1. wired network ports.
2. optical fibre ports with metallic shield or tension members.
3. antenna ports.

Frequency range MHz	Coupling device	Detector type / bandwidth	Class_A voltage limits dB(μV)	Class_A current limits dB(μA)
0.15-0.5	AAN	Quasi Peak / 9 kHz	97-87	n/a
0.5-30			87	
0.15-0.5	AAN	Average / 9 kHz	84-74	
0.5-30			74	
0.15-0.5	CVP and current probe	Quasi Peak / 9 kHz	97-87	53-43
0.5-30			87	43
0.15-0.5	CVP and current probe	Average / 9 kHz	84-74	40-30
0.5-30			74	30
0.15-0.5	Current Probe	Quasi Peak / 9 kHz	n/a	53-43
0.5-30				43
0.15-0.5	Current Probe	Average / 9 kHz		40-30
0.5-30				30

Asymmetric mode conducted emissions from Class_B equipment:

Applicable to:

1. wired network ports.
2. optical fibre ports with metallic shield or tension members.
3. broadcast receiver tuner ports.
4. antenna ports.




Frequency range MHz	Coupling device	Detector type / bandwidth	Class B voltage limits dB(μV)	Class B current limits dB(μA)
0.15-0.5	AAN	Quasi Peak / 9 kHz	84-74	n/a
0.5-30			74	
0.15-0.5	AAN	Average / 9 kHz	74-64	
0.5-30			64	
0.15-0.5	CVP and current probe	Quasi Peak / 9 kHz	84-74	40-30
0.5-30			74	30
0.15-0.5	CVP and current probe	Average / 9 kHz	74-64	30-20
0.5-30			64	20
0.15-0.5	Current Probe	Quasi Peak / 9 kHz	n/a	40-30
0.5-30				30
0.15-0.5	Current Probe	Average / 9 kHz		30-20
0.5-30				20

****Remarks: It is not necessary to be tested on this item.**

4. Radiated Disturbance Emissions

4.1 Test Setup and Procedure

4.1.1 Test Setup

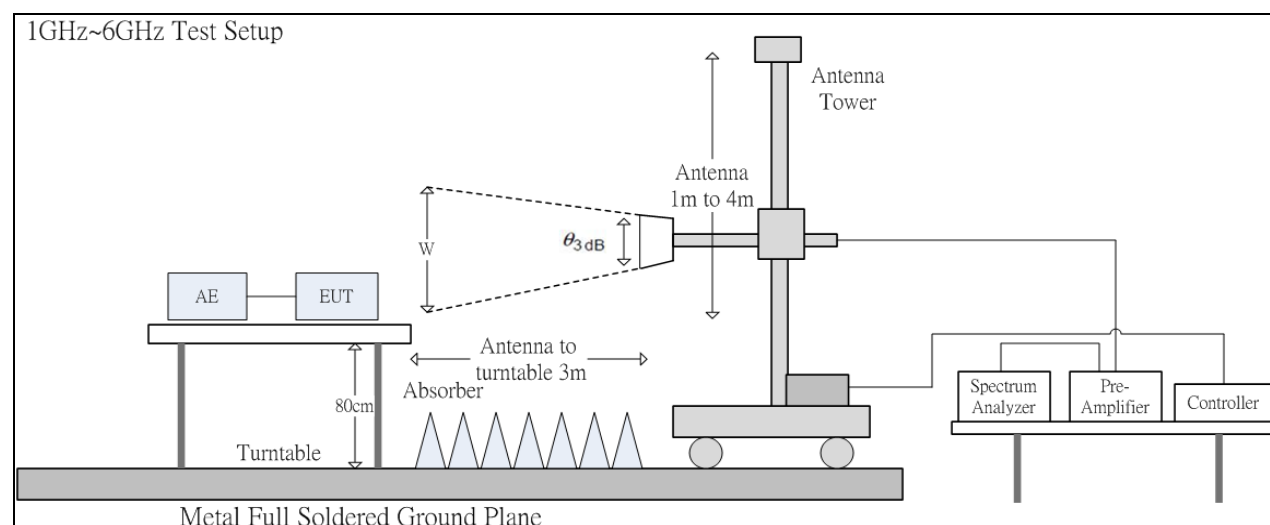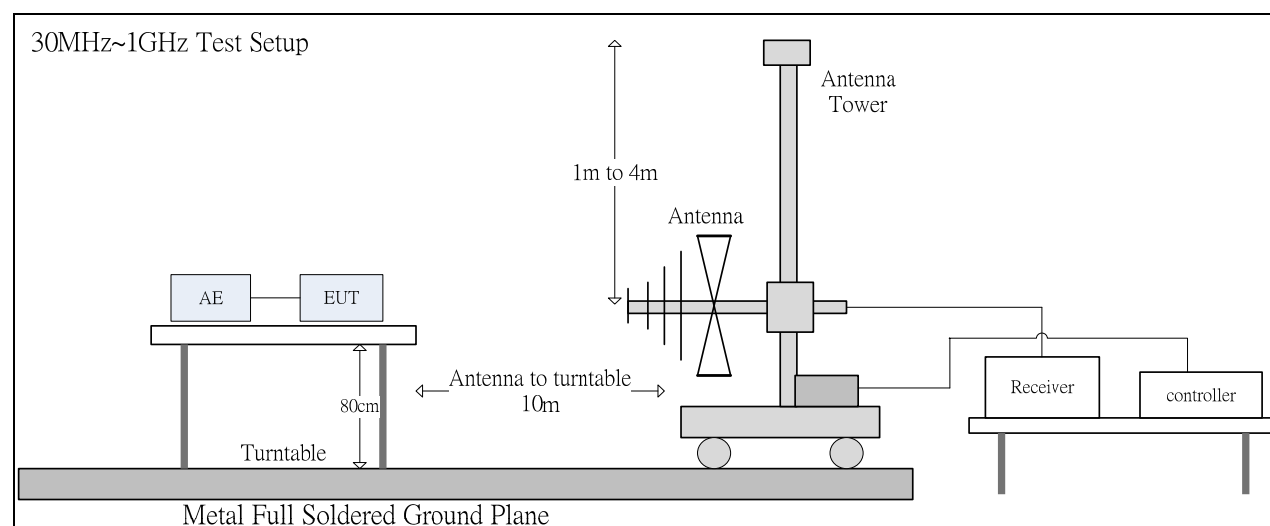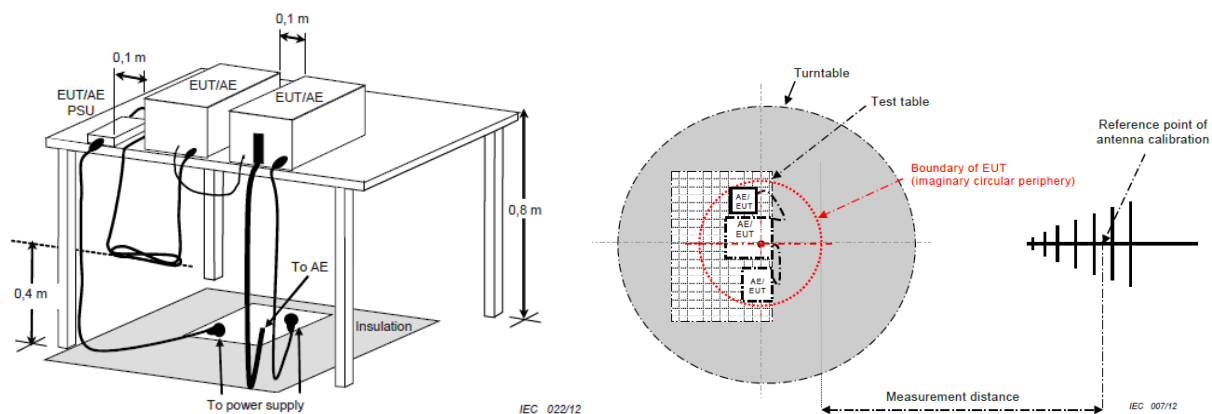

The 3dB beam width of the horn antenna used for the test is as shown in the table below.

Frequency (GHz)	E-plane	H-plane	$\theta_{3dB}(\text{min})$	d= 3 m
				w (m)
1	88°	147°	88°	5.79
2	68°	119°	68°	4.04
3	73°	92°	73°	4.44
4	70°	89°	70°	4.20
5	55°	60°	55°	3.12
6	63°	62°	62°	3.60

4.1.2 Test Procedure

The radiated emissions test will then be repeated on the chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of 10 meter chamber. Desktop EUT are set up on a FRP stand 0.8 meter above the ground or floor-standing arrangement shall be placed on the horizontal ground reference plane.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The highest emissions between 1 GHz to 6 GHz were analyzed in details by operating the spectrum analyzer in peak and average mode to determine the precise amplitude of the emissions. The test volume for a height of up to 30 cm may be obstructed by absorber placed on the ground plane.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings. All of the interface cables were manipulated according to EN 55032 / BS EN 55032 requirements.

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.

If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

4.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 30MHz--1000MHz
 Detector Function: Quasi-Peak Mode
 Resolution Bandwidth: 120kHz

Frequency Range: Above 1 GHz to 6 GHz
 Detector Function: Peak/Average Mode
 Resolution Bandwidth: 1MHz

4.2 Limit

Radiated emissions at frequencies up to 1 GHz for Class_A equipment:

Frequency range MHz	Measurement		Class_A limits dB(μV/m)
	Distance m	Detector type / bandwidth	OATS/SAC
30-230	10	Quasi Peak / 120 kHz	40
230-1000			47
30-230	3		50
230-1000			57

Radiated emissions at frequencies above 1 GHz for Class_A equipment:

Frequency range MHz	Measurement		Class_A limits dB(μ V/m)
	Distance m	Detector type / bandwidth	FSOATS
1000-3000	3	Average / 1MHz	56
3000-6000			60
1000-3000		Peak / 1MHz	76
3000-6000			80

Radiated emissions at frequencies up to 1 GHz for Class_B equipment:

Frequency range MHz	Measurement		Class_B limits dB(μV/m)
	Distance m	Detector type / bandwidth	OATS/SAC
30-230	10	Quasi Peak / 120 kHz	30
230-1000			37
30-230	3		40
230-1000			47


Radiated emissions at frequencies above 1 GHz for Class_B equipment:

Frequency range MHz	Measurement		Class_B limits dB(μ V/m)
	Distance m	Detector type / bandwidth	FSOATS
1000-3000	3	Average / 1MHz	50
3000-6000			54
1000-3000		Peak / 1MHz	70
3000-6000			74

Radiated emissions from FM receivers:

Frequency range MHz	Measurement		Class_B limits dB(μV/m)	
	Distance m	Detector type / bandwidth	Fundamental	Harmonics
			OATS/SAC	OATS/SAC
30-230	10	Quasi Peak / 120 kHz	50	42
230-300				42
300-1000				46
30-230	3		60	52
230-300				52
300-1000				56

4.3 Radiation Test Data: Configuration 1 - Radiated Emissions (Horizontal)

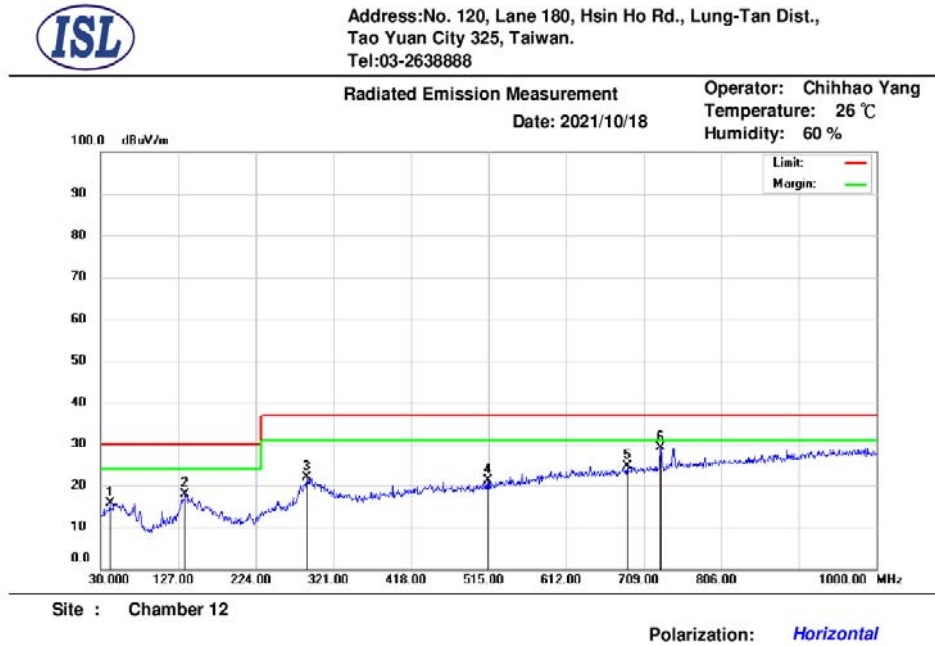

Mk.	Frequency (MHz)	RX R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	41.64	32.25	-16.56	15.69	30.00	-14.31	200	339	QP
2	135.73	34.36	-16.59	17.77	30.00	-12.23	400	118	QP
3	288.02	36.37	-14.37	22.00	37.00	-15.00	200	289	QP
4	514.03	30.57	-9.52	21.05	37.00	-15.95	100	194	QP
5	688.63	30.52	-5.96	24.56	37.00	-12.44	100	257	QP
6	730.34	34.05	-5.00	29.05	37.00	-7.95	400	8	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888


Radiated Emission Measurement

Date: 2021/10/15

Operator: Ted Fan

Temperature: 26 °C

Humidity: 60 %

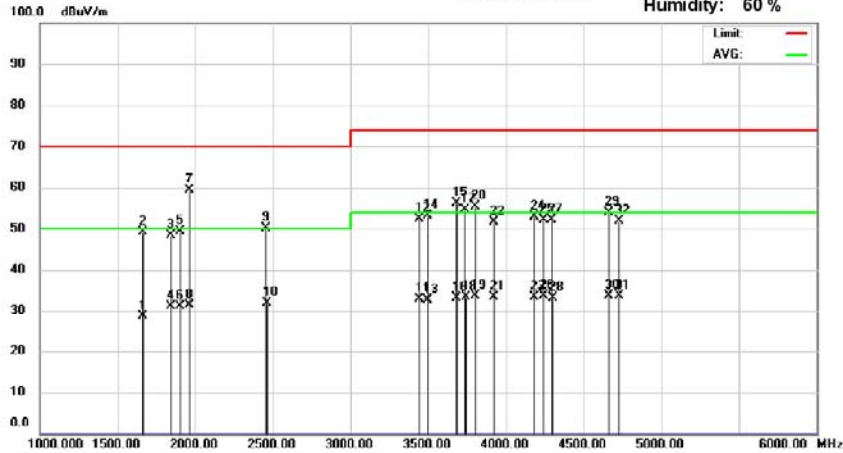

Site : Chamber 14

Polarization: Horizontal

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1659.55	43.81	-15.25	28.56	50.00	-21.44	101	166	AVG
2	1660.00	64.35	-15.25	49.10	70.00	-20.90	100	189	peak
3	1840.00	61.81	-13.41	48.40	70.00	-21.60	100	208	peak
4	1843.71	44.47	-13.38	31.09	50.00	-18.91	101	211	AVG
5	1900.00	62.70	-13.20	49.50	70.00	-20.50	199	145	peak
6	1900.35	44.35	-13.20	31.15	50.00	-18.85	200	142	AVG
7	1960.00	72.35	-12.91	59.44	70.00	-10.56	100	219	peak
8	1961.26	44.15	-12.89	31.26	50.00	-18.74	142	142	AVG
9	2455.00	61.53	-11.50	50.03	70.00	-19.97	100	235	peak
10	2457.76	43.48	-11.48	32.00	50.00	-18.00	101	143	AVG
11	3440.88	43.27	-10.36	32.91	54.00	-21.09	101	187	AVG
12	3445.00	62.63	-10.36	52.27	74.00	-21.73	199	219	peak
13	3494.97	42.98	-10.33	32.65	54.00	-21.35	138	216	AVG
14	3495.00	63.55	-10.33	53.22	74.00	-20.78	199	239	peak
15	3680.00	65.98	-9.77	56.21	74.00	-17.79	100	221	peak
16	3681.29	42.86	-9.77	33.09	54.00	-20.91	118	216	AVG
17	3735.00	64.39	-9.76	54.63	74.00	-19.37	100	219	peak
18	3737.32	43.18	-9.76	33.42	54.00	-20.58	101	221	AVG
19	3799.00	43.20	-9.53	33.67	54.00	-20.33	131	221	AVG
20	3800.00	64.97	-9.53	55.44	74.00	-18.56	199	218	peak

* Note:

Margin = Emission - Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

Site : Chamber 14

Polarization: *Horizontal*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
21	3924.00	42.70	-9.39	33.31	54.00	-20.69	170	221	AVG
22	3925.00	61.10	-9.39	51.71	74.00	-22.29	199	210	peak
23	4183.41	42.70	-9.23	33.47	54.00	-20.53	143	221	AVG
24	4185.00	62.05	-9.23	52.82	74.00	-21.18	100	240	peak
25	4240.00	61.30	-9.06	52.24	74.00	-21.76	199	212	peak
26	4240.51	42.79	-9.06	33.73	54.00	-20.27	101	210	AVG
27	4295.00	61.31	-9.19	52.12	74.00	-21.88	199	9	peak
28	4297.22	42.43	-9.20	33.23	54.00	-20.77	127	210	AVG
29	4660.00	62.72	-8.85	53.87	74.00	-20.13	100	226	peak
30	4660.71	42.54	-8.85	33.69	54.00	-20.31	181	210	AVG
31	4728.92	42.53	-8.80	33.73	54.00	-20.27	176	210	AVG
32	4730.00	60.68	-8.80	51.88	74.00	-22.12	100	185	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor


Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

-Radiated Emissions (Vertical)

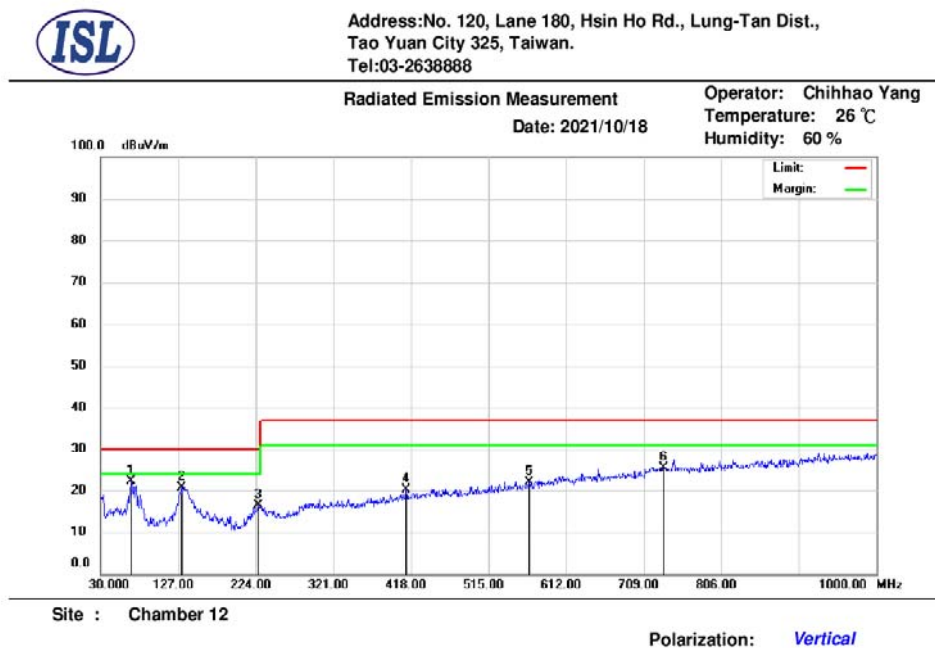

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	67.83	39.81	-17.60	22.21	30.00	-7.79	100	20	QP
2	131.85	37.65	-16.97	20.68	30.00	-9.32	200	118	QP
3	226.91	34.53	-18.21	16.32	30.00	-13.68	100	121	QP
4	412.18	30.95	-10.90	20.05	37.00	-16.95	400	256	QP
5	565.44	30.23	-8.31	21.92	37.00	-15.08	400	16	QP
6	734.22	30.32	-4.93	25.39	37.00	-11.61	225	0	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.




Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement

Date: 2021/10/15

Operator: Ted Fan
Temperature: 26 °C
Humidity: 60 %

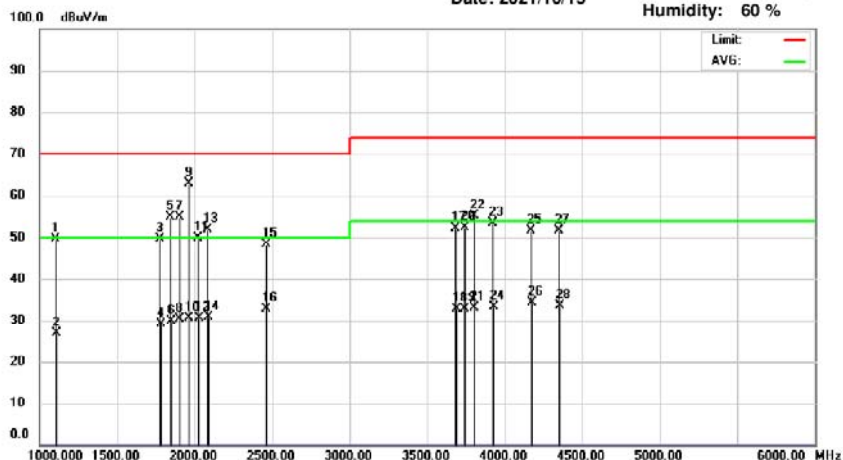

Site : Chamber 14

Polarization: Vertical

Mk.	Frequency (MHz)	RX R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1105.00	66.03	-16.51	49.52	70.00	-20.48	200	224	peak
2	1106.63	43.50	-16.50	27.00	50.00	-23.00	175	179	AVG
3	1775.00	63.74	-14.02	49.72	70.00	-20.28	100	170	peak
4	1777.46	43.24	-14.00	29.24	50.00	-20.76	165	179	AVG
5	1845.00	68.15	-13.37	54.78	70.00	-15.22	100	156	peak
6	1845.05	43.27	-13.37	29.90	50.00	-20.10	138	179	AVG
7	1900.00	68.12	-13.20	54.92	70.00	-15.08	100	146	peak
8	1900.23	43.55	-13.20	30.35	50.00	-19.65	101	144	AVG
9	1960.00	75.74	-12.91	62.83	70.00	-7.17	200	160	peak
10	1961.99	43.59	-12.89	30.70	50.00	-19.30	123	144	AVG
11	2025.00	62.29	-12.48	49.81	70.00	-20.19	100	118	peak
12	2027.45	43.02	-12.47	30.55	50.00	-19.45	111	144	AVG
13	2085.00	64.09	-12.21	51.88	70.00	-18.12	100	169	peak
14	2085.80	43.12	-12.21	30.91	50.00	-19.09	101	152	AVG
15	2460.00	59.90	-11.47	48.43	70.00	-21.57	200	182	peak
16	2460.44	44.26	-11.47	32.79	50.00	-17.21	101	185	AVG
17	3685.00	61.88	-9.77	52.11	74.00	-21.89	200	176	peak
18	3687.04	42.75	-9.77	32.98	54.00	-21.02	122	185	AVG
19	3743.21	42.72	-9.75	32.97	54.00	-21.03	112	185	AVG
20	3745.00	62.07	-9.75	52.32	74.00	-21.68	100	194	peak

* Note:

Margin = Emission - Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

Site : Chamber 14

Polarization: *Vertical*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
21	3804.10	42.57	-9.52	33.05	54.00	-20.95	101	175	AVG
22	3805.00	64.53	-9.52	55.01	74.00	-18.99	100	165	peak
23	3925.00	62.65	-9.39	53.26	74.00	-20.74	100	156	peak
24	3925.26	42.78	-9.39	33.39	54.00	-20.61	101	159	AVG
25	4170.00	60.78	-9.24	51.54	74.00	-22.46	100	188	peak
26	4171.99	43.70	-9.24	34.46	54.00	-19.54	101	180	AVG
27	4350.00	60.66	-9.10	51.56	74.00	-22.44	100	193	peak
28	4352.29	42.85	-9.10	33.75	54.00	-20.25	101	196	AVG

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters


Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

4.4 Test Setup Photo


Front View (30MHz~1GHz)




Back View (30MHz~1GHz)

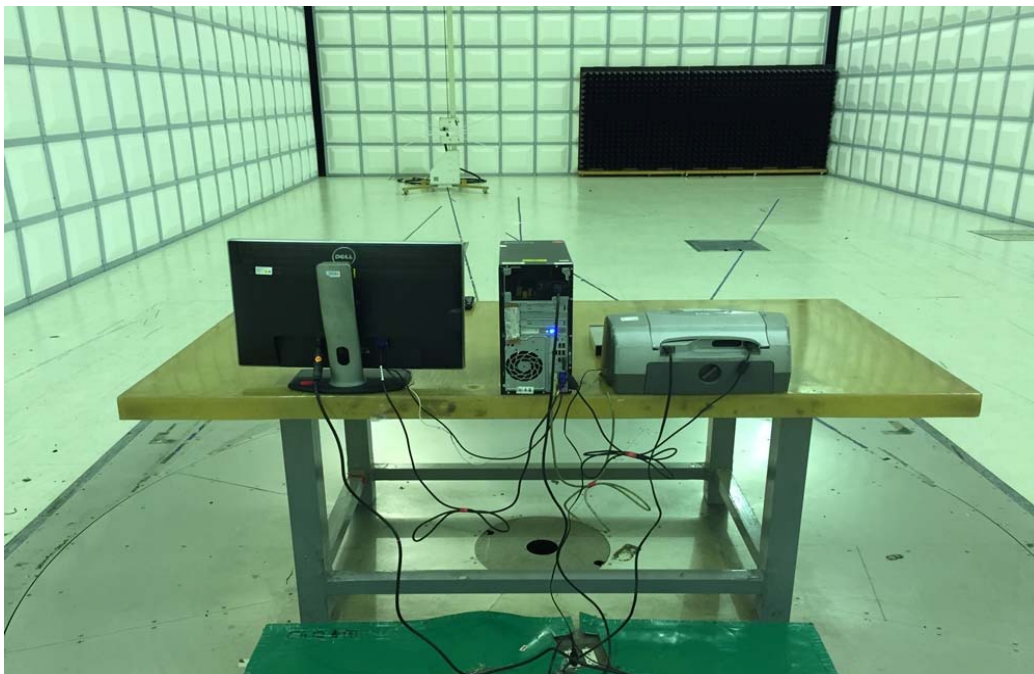

Front View (above 1GHz)

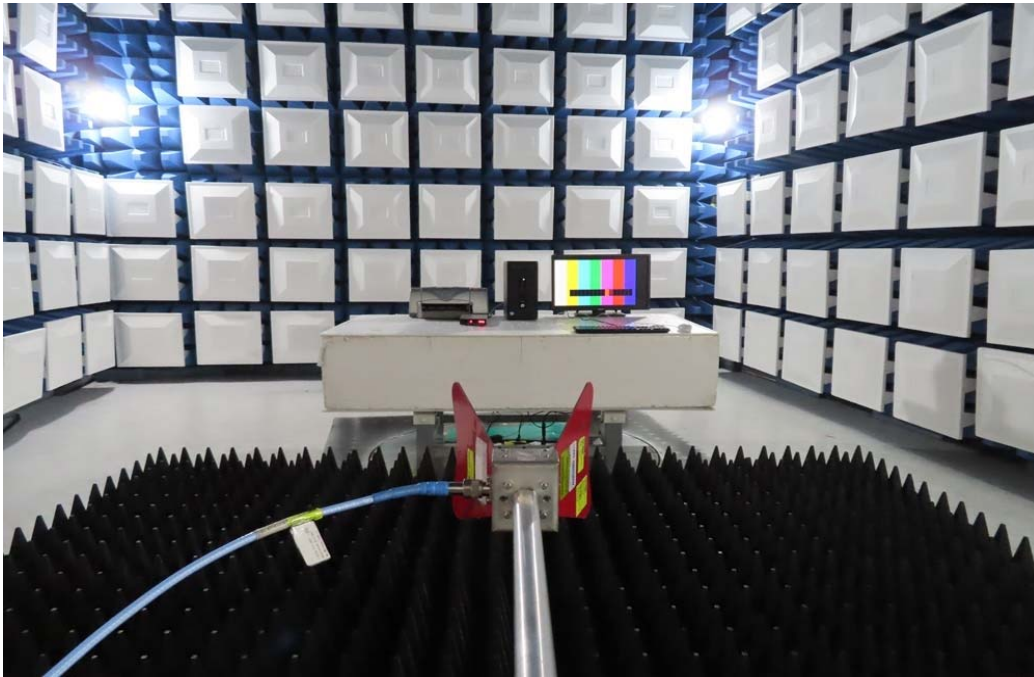


Back View (above 1GHz)

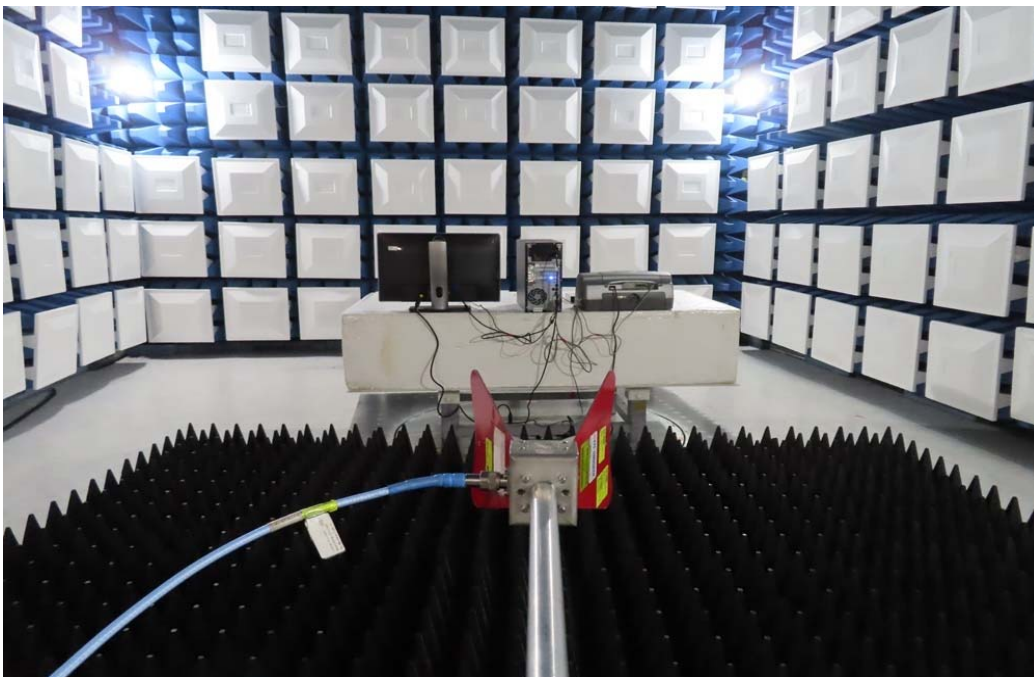

5. Voltage Disturbance Emissions at Antenna Terminals

5.1 Test Setup and Procedure

5.1.1 Test Setup

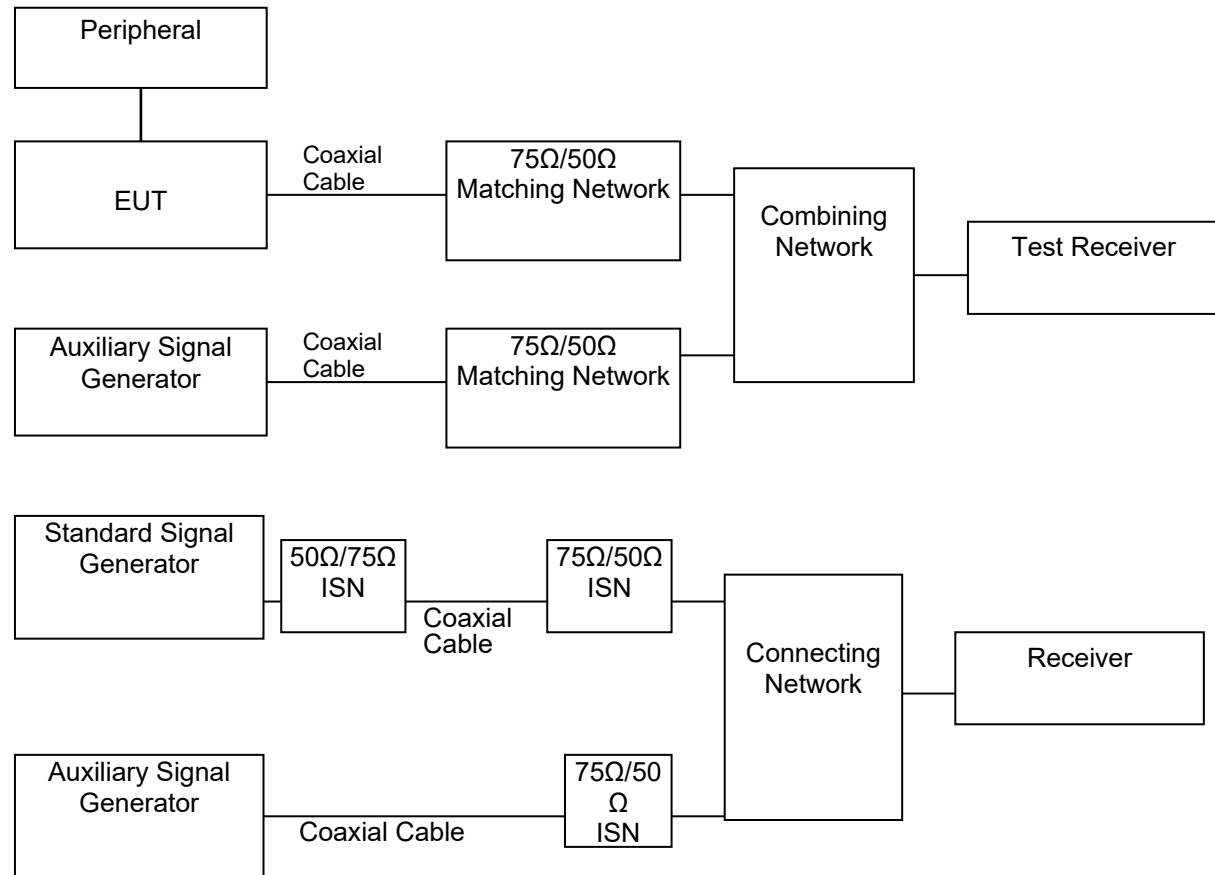

5.1.2 Test Procedure

The output level of the auxiliary signal generator was set to 70dBuV at the EUT antenna terminal with 75 ohms impedance with an un-modulated carrier.

The highest emissions were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The power of EUT was switched off to make sure the emission was not contributed by the auxiliary signal generator. While doing so, the interconnecting cables and major parts of the system were moved around to maximize the emission.

5.1.3 EMI Receiver Configuration (for the frequencies tested)

Frequency Range:	30MHz-2150MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120kHz

5.1.4 Limit

Applicable to:

1. TV broadcast receiver tuner ports with an accessible connector.
2. RF modulator output ports.
3. FM broadcast receiver tuner ports with an accessible connector.


Table clause	Frequency range MHz	Detector type/ bandwidth	Class B limits dB(μV) 75 Ω			Applicability
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics	
A12.1	30 – 950	For frequencies ≤1 GHz	46	46	46	See a)
	950 – 2 150		46	54	54	
A12.2	950 – 2 150	Quasi Peak/ 120 kHz	46	54	54	See b)
A12.3	30 – 300		46	54	50	See c)
	300 – 1 000	52				
A12.4	30 – 300	For frequencies ≥1 GHz	46	66	59	See d)
	300 – 1 000				52	
A12.5	30 – 950	Peak/ 1 MHz	46	76	46	See e)
	950 – 2 150			n/a	54	
a) Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.						
b) Tuner units (not the LNB) for satellite signal reception.						
c) Frequency modulation audio receivers and PC tuner cards.						
d) Frequency modulation car radios.						
e) Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports.						

****Remarks: It is not necessary to be tested on this item.**

6. Differential Voltage Emissions

6.1 Test Setup and Procedure

6.1.1 Test Setup

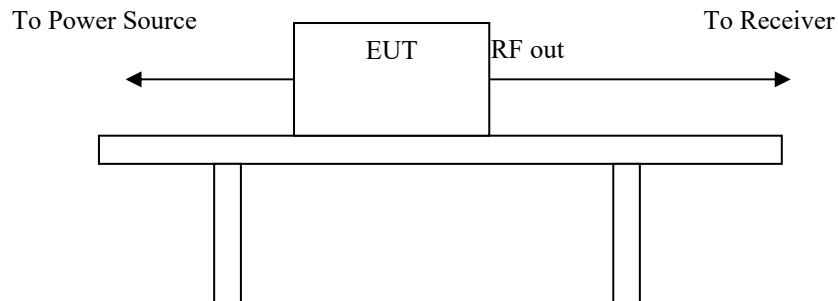

6.1.2 Test Procedure

The output level of the auxiliary signal generator was set to 70dBuV at the EUT antenna terminal with 75 ohms impedance with an un-modulated carrier.

The highest emissions were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The power of EUT was switched off to make sure the emission was not contributed by the auxiliary signal generator. While doing so, the interconnecting cables and major parts of the system were moved around to maximize the emission.

6.1.3 EMI Receiver Configuration (for the frequencies tested)

Frequency Range:	30MHz-2150MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120kHz

6.1.4 Limit

Applicable to:

1. TV broadcast receiver tuner ports with an accessible connector.
2. RF modulator output ports.
3. FM broadcast receiver tuner ports with an accessible connector.



Table clause	Frequency range MHz	Detector type/ bandwidth	Class B limits dB(μV) 75 Ω			Applicability
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics	
A12.1	30 – 950	For frequencies ≤1 GHz	46	46	46	See a)
	950 – 2 150		46	54	54	
A12.2	950 – 2 150	Quasi Peak/ 120 kHz	46	54	54	See b)
A12.3	30 – 300		46	54	50	See c)
	300 – 1 000	52				
A12.4	30 – 300	For frequencies ≥1 GHz	46	66	59	See d)
	300 – 1 000				52	
A12.5	30 – 950	Peak/ 1 MHz	46	76	46	See e)
	950 – 2 150			n/a	54	
a) Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.						
b) Tuner units (not the LNB) for satellite signal reception.						
c) Frequency modulation audio receivers and PC tuner cards.						
d) Frequency modulation car radios.						
e) Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports.						

****Remarks: It is not necessary to be tested on this item.**

7. Outdoor units of home satellite receiving systems

7.1 Test Setup and Procedure

7.1.1 Test Setup

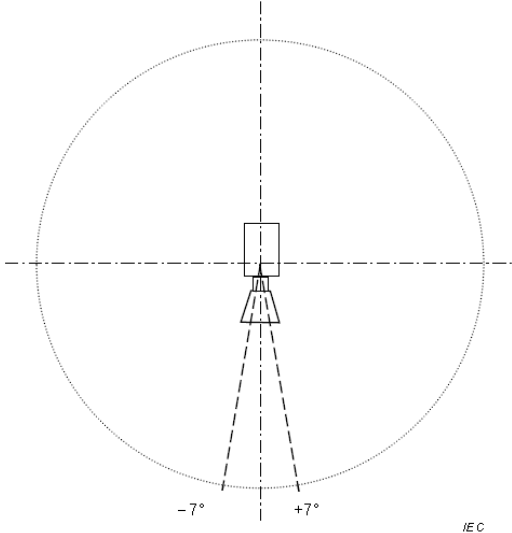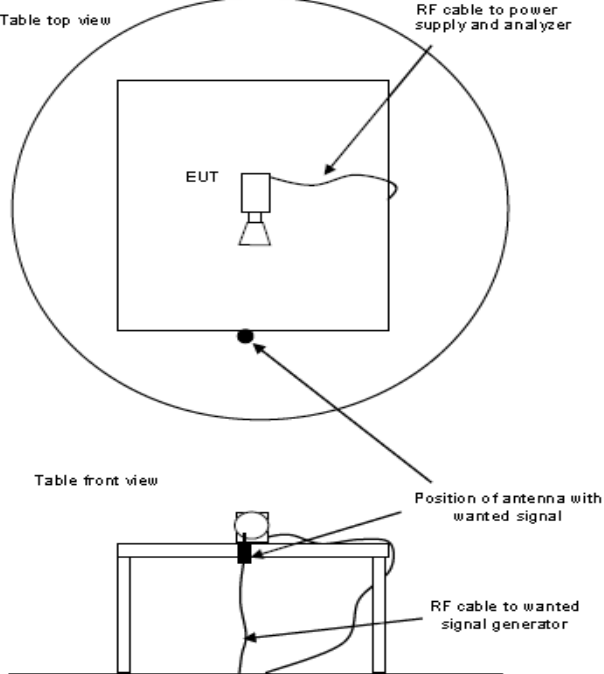	
Description of $\pm 7^\circ$ of the main beam axis of the EUT	Measurement arrangements of transmit antenna for the wanted signal

7.1.2 Test Procedure

The input signal shall be adjusted to get the maximum rated output level from the EUT. For the measurement in the frequency range from 30 MHz to 18 GHz the input signal shall be adjusted so that the output frequency is within this frequency range. For the measurement in the frequency range above 1 GHz, the frequency of the input signal shall be adjusted in such a way that the EUT is measured, as a minimum, at the lowest, middle and highest rated output frequency within the measured frequency range.

7.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 30MHz--1000MHz
 Detector Function: Quasi-Peak Mode
 Resolution Bandwidth: 120kHz

Frequency Range: Above 1000MHz
 Detector Function: Peak/Average Mode
 Resolution Bandwidth: 1MHz

7.1.4 Limit

Table Clause	Frequency Range MHz	Measurement			Class B Limits	Applicable to
		Facility (see Table A.1)	Distance m	Detector type / Bandwidth		
A7.1	30 to 1 000	SAC / OATS / FAR	See Table A.4	Quasi Peak / 120 kHz	See Table A.4	
A7.2	1 000 to 2 500	FSOATS	3	Average / 1 MHz	50 dB(μV/m)	LO leakage and spurious radiated emissions from the EUT, in the region outside ±7° of the main beam axis. See Figure H.1
	2 500 to 18 000				64 dB(μV/m)	
A7.3	1 000 to 18 000	FSOATS	3	Average / 1 MHz	37 dB(μV/m)	LO leakage from the EUT, in the region within ±7° of the main beam axis. See Figure H.1
A7.4	1 000 to 18 000	Conducted (Clause H.4)	n/a	Average / 1 MHz	30 dBpW	
For details of the EUT configuration, see Annex H.						
For radiated emissions measurements at frequencies up to 1 GHz, the requirements defined in Table A.4 shall be satisfied.						
Apply the appropriate limits across the entire frequency range.						
Apply the limits defined in table Clause A7.1 and A7.2. Also apply the limits defined in either table Clause A7.3 or A7.4.						

****Remarks: It is not necessary to be tested on this item.**

8. Electrostatic discharge (ESD) immunity

8.1 Test Specification and Setup

8.1.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-2 / IEC 61000-4-2 / BS EN 61000-4-2 (details referred to Sec 1.2)
Test Level:	Air +/- 2 kV, +/- 4 kV, +/- 8 kV Contact +/- 4 kV
Criteria:	B
Test Procedure:	refer to ISL QA -T4-E-S7
Temperature:	23°C
Humidity:	40%

Selected Test Point


Air: discharges were applied to slots, aperture or insulating surfaces. 10 single air discharges were applied to each selected points.

Contact: 10 discharges minimum were to the selected contact points.

Indirect Contact Points: 10 discharges were applied to center of one edge of VCP and each EUT side of HCP with 10 cm away from EUT.

8.1.2 Test Setup

EUT is 1m from the wall and other metallic structure. When Battery test mode is needed, a cable with one 470kΩ resistor at two rare ends is connected from metallic part of EUT and screwed to HCP.

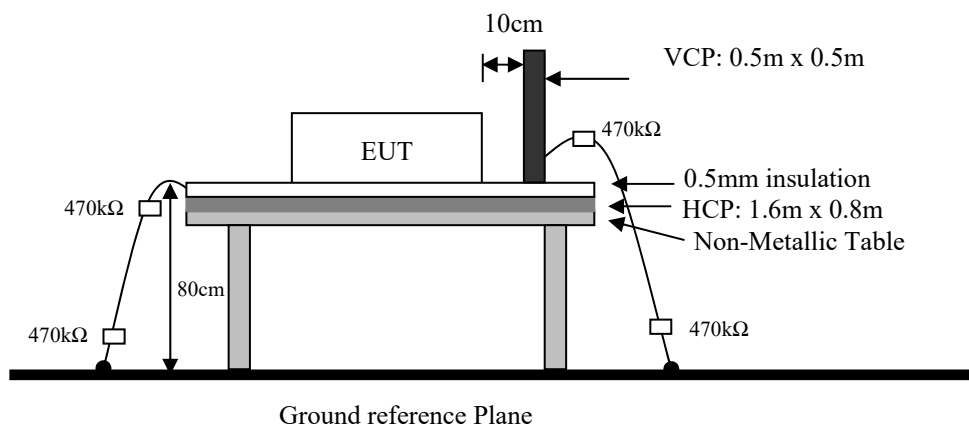


8.1.3 Test Result

Performance of EUT complies with the given specification.


8.2 Test Point

Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.

Figure 1: Test Point Assignments Discharge:

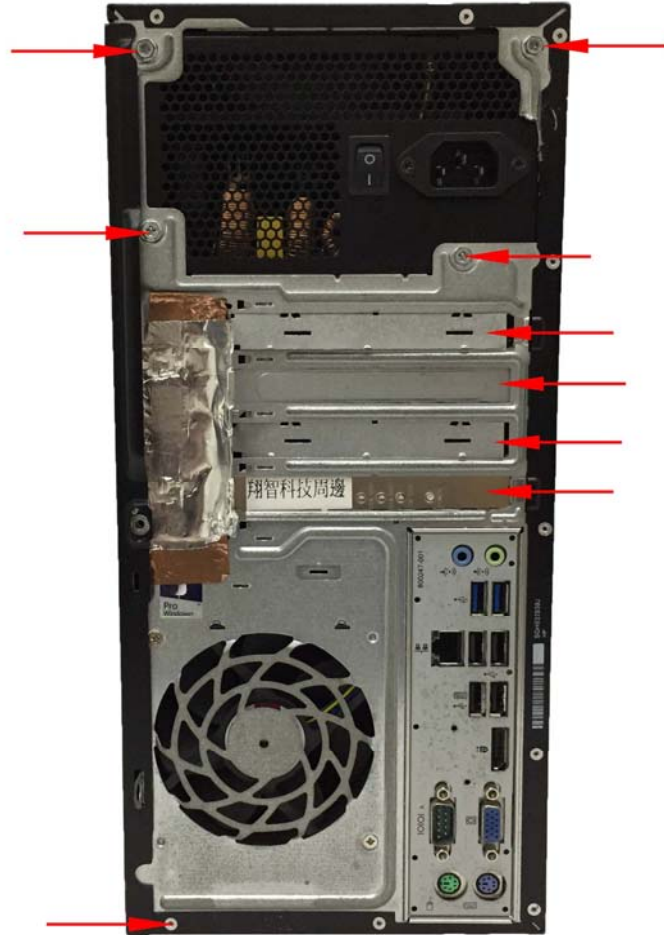

8.3 Test Setup Photo

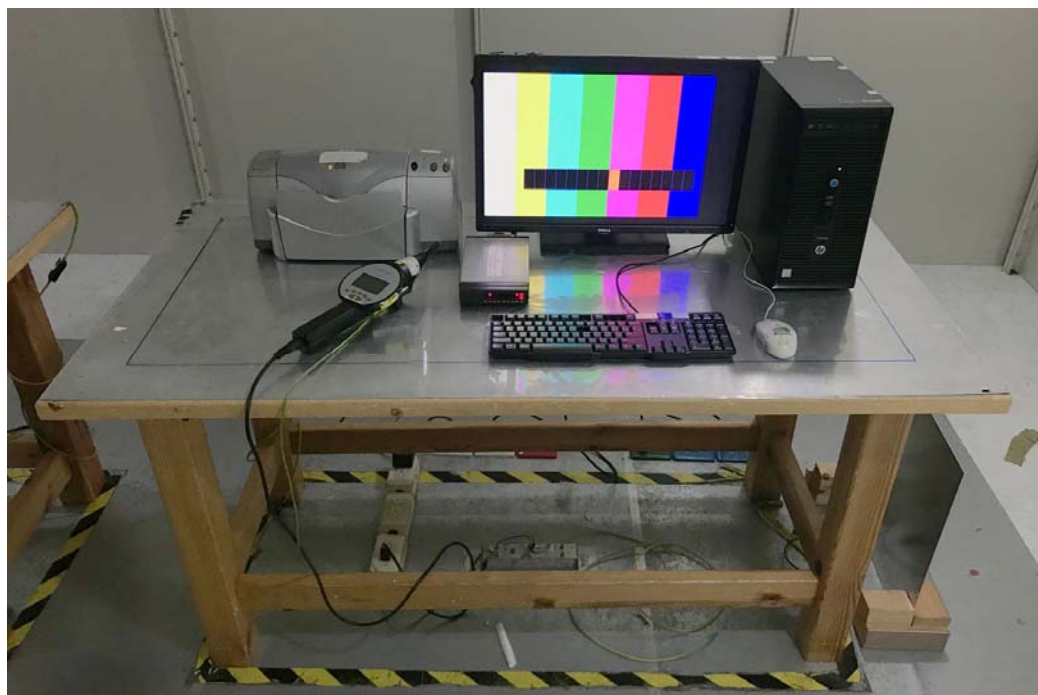

9. Radio-Frequency, Electromagnetic Field immunity


9.1 Test Specification and Setup

9.1.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-3 / IEC 61000-4-3 / BS EN 61000-4-3 (details referred to Sec 1.2)
Test Level:	3 V/m
Modulation:	AM 1kHz 80%
Frequency range:	80 MHz~1 GHz 1800MHz, 2600MHz, 3500MHz, 5000MHz
Frequency Step:	1% of last step frequency
Dwell time:	2s
Polarization:	Vertical and Horizontal
EUT Azimuth Angle	☒ 0° ☒ 90° ☒ 180° ☒ 270°
Criteria:	A
Test Procedure:	refer to ISL QA -T4-E-S8
Temperature:	25°C
Humidity:	56%

9.1.2 Test Setup

The field sensor is placed at one calibration grid point to check the intensity of the established fields on both polarizations. EUT is adjusted to have each side of EUT face coincident with the calibration plane. A CCD camera and speakers are used to monitor the condition of EUT for the performance judgment.

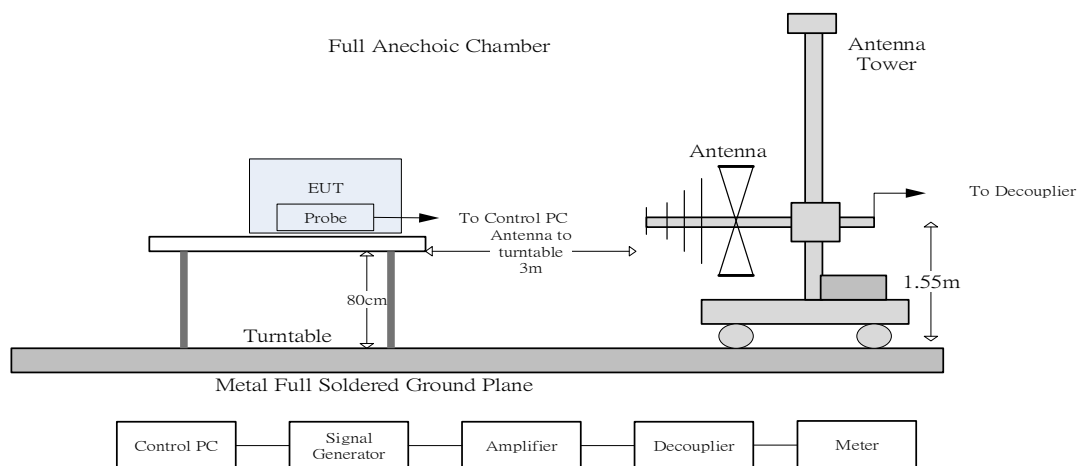

9.1.3 Test Result

Performance of EUT complies with the given specification.

9.2 Test Setup Photo



10. Electrical Fast transients/burst immunity

10.1 Test Specification and Setup

10.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-4 / IEC 61000-4-4 / BS EN 61000-4-4 (details referred to Sec 1.2)
Test Level:	AC Power Port: +/- 1 kV
Rise Time:	5ns
Hold Time:	50ns
Burst Period:	300ms
Repetition Frequency:	5kHz
Criteria:	B
Test Procedure:	refer to ISL QA -T4-E-S9
Temperature:	25°C
Humidity:	55%

Test Procedure


The EUT was setup on a nonconductive table 0.1 m above a reference ground plane.

Test Points	Polarity	Result	Comment
Line	+	N	60 sec
	-	N	60 sec
Neutral	+	N	60 sec
	-	N	60 sec
Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral	+	N	60 sec
	-	N	60 sec
Line to Ground	+	N	60 sec
	-	N	60 sec
Neutral to Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral to Ground	+	N	60 sec
	-	N	60 sec

Note: 'N' means normal, the EUT function is correct during the test.

10.1.2 Test Setup

EUT is at least 50cm from the conductive structure.

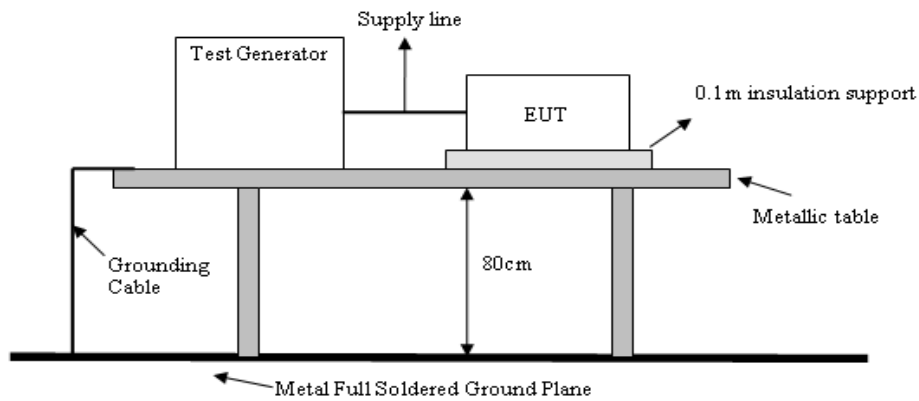

10.1.3 Test Result

Performance of EUT complies with the given specification.

10.2 Test Setup Photo




11. Surge Immunity

11.1 Test Specification and Setup

11.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-5 / IEC 61000-4-5 / BS EN 61000-4-5 (details referred to Sec 1.2)
Test Level:	Line to Line: +/- 0.5 kV, +/- 1 kV Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 2kV
Rise Time:	1.2us
Hold Time:	50us
Repetition Rate:	30 seconds
Angle:	☐ 0° ☒ 90° ☐ 180° ☒ 270°
Criteria:	B
Test Procedure:	refer to ISL QA -T4-E-S10
Temperature:	25°C
Humidity:	55%

11.1.2 Test Setup

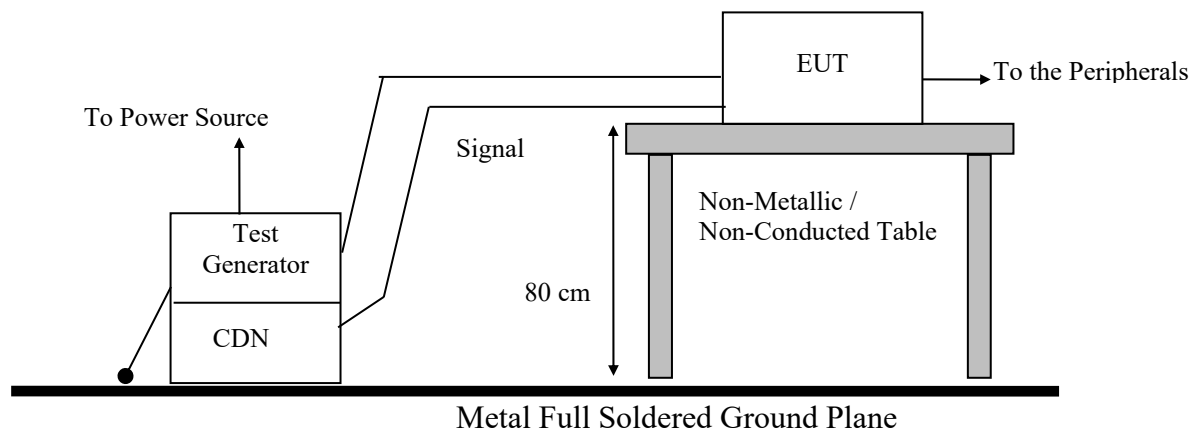

11.1.3 Test Result

Performance of EUT complies with the given specification.

11.2 Test Setup Photo




12. Immunity to Conductive Disturbance

12.1 Test Specification and Setup

12.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-6 / IEC 61000-4-6 / BS EN 61000-4-6 (details referred to Sec 1.2)
Frequency range and Test Level:	0.15MHz to 10MHz: 3 Vrms 10MHz to 30MHz: 3Vrms to 1Vrms 30MHz to 80MHz: 1Vrms
Modulation:	AM 1kHz 80%
Frequency Step:	1% of last Frequency
Dwell time:	2s
Criteria:	A
CDN Type:	CDN M2+M3
Test Procedure:	refer to ISL QA -T4-E-S11
Temperature:	24°C
Humidity:	57%

12.1.2 Test Setup

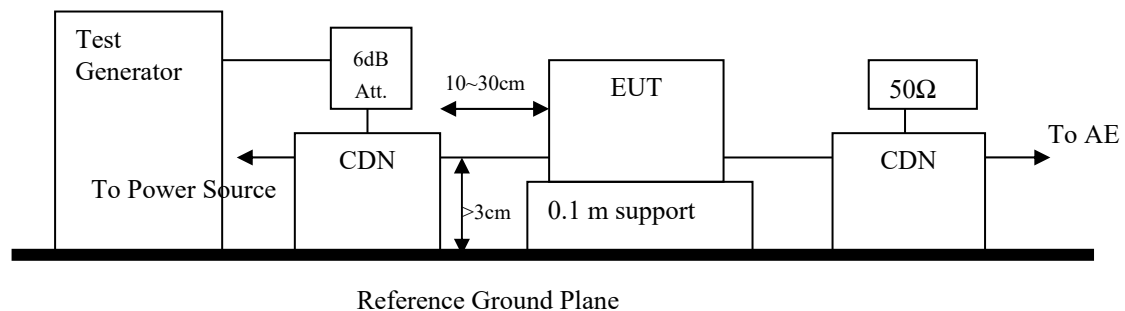

12.1.3 Test Result

Performance of EUT complies with the given specification.

12.2 Test Setup Photo




13. Power Frequency Magnetic Field immunity

13.1 Test Specification and Setup

13.1.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-8 / IEC 61000-4-8 / BS EN 61000-4-8 (details referred to Sec 1.2)
Test Level:	1A/m
Polarization:	X, Y, Z
Criteria:	A
Test Procedure:	refer to ISL QA -T4-E-S12
Temperature:	24°C
Humidity:	57%

13.1.2 Test Setup

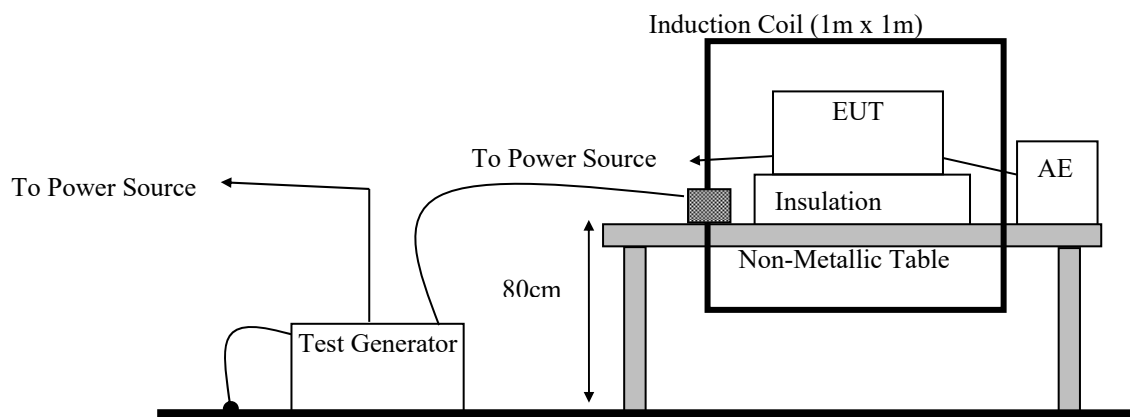

13.1.3 Test Result

Performance of EUT complies with the given specification.

13.2 Test Setup Photo




14. Voltage Dips, Short Interruption and Voltage Variation immunity

14.1 Test Specification and Setup

14.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-11 / IEC 61000-4-11 / BS EN 61000-4-11 (details referred to Sec 1.2)
Test Level: Criteria:	>95% in 0.5 cycle B
Test Level: Criteria:	30% in 25 cycle C
Test Level: Criteria:	>95% in 250 cycle C
Phase:	0°; 180°
Test intervals:	3 times with 10s each
Test Procedure:	refer to ISL QA -T4-E-S13
Temperature:	25°C
Humidity:	56%

14.1.2 Test Setup

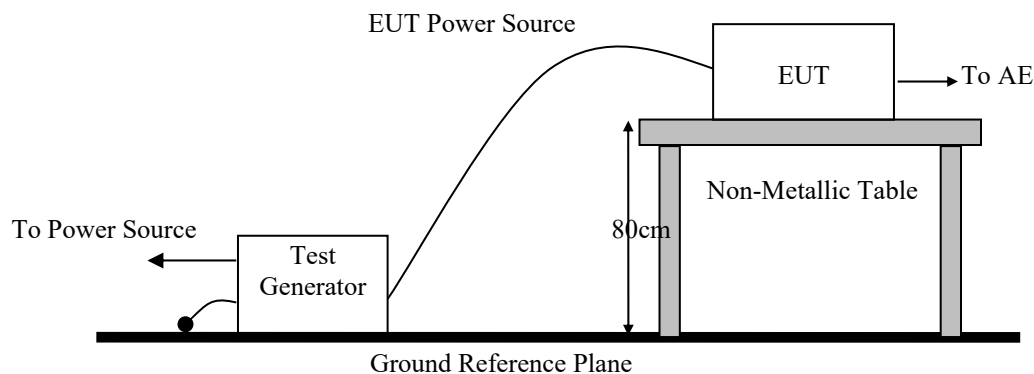

14.1.3 Test Result

Performance of EUT complies with the given specification.

14.2 Test Setup Photo



15. Harmonics

15.1 Test Specification and Setup

15.1.1 Test Specification


Port:	AC mains
Active Input Power:	<75W
Basic Standard:	EN IEC 61000-3-2 / IEC 61000-3-2 / BS EN IEC 61000-3-2 (details referred to Sec 1.2)
Test Duration:	2.5min
Class:	A
Test Procedure:	refer to ISL QA -T4-E-S14
Temperature:	24°C
Humidity:	57%

Test Procedure

The EUT is supplied in series with shunts or current transformers from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the EUT. The EUT is configured to its rated current with additional resistive load when the testing is performed.

Equipment having more than one rated voltage shall be tested at the rated voltage producing the highest harmonics as compared with the limits.

15.1.2 Test Setup

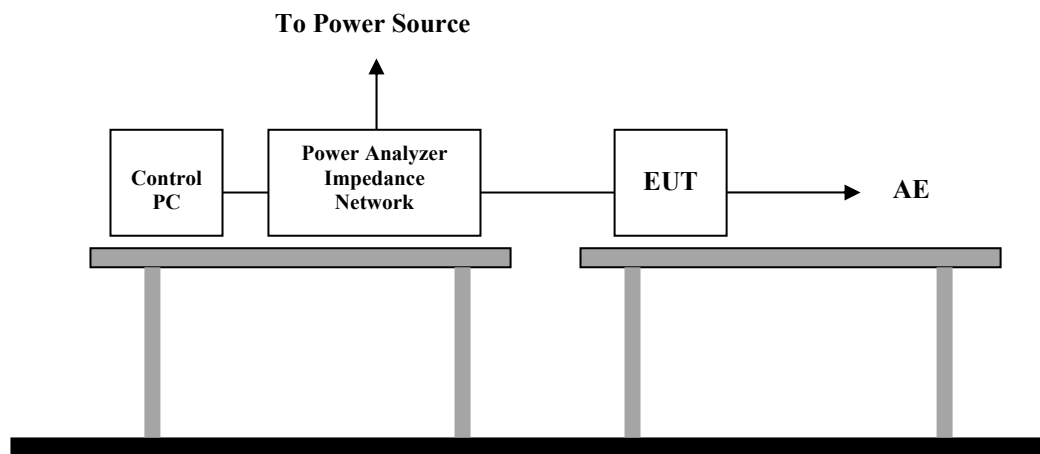

15.1.3 Limit

Limits of Class A Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current A	Harmonics Order n	Maximum Permissible harmonic current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	$8 \leq n \leq 40$	$0.23 * 8/n$
11	0.33		
13	0.21		
$15 \leq n \leq 39$	$0.15 * 15/n$		

15.1.4 Test Result

Active input power under 75W, no limit apply, declare compliance.

16. Voltage Fluctuations

16.1 Test Specification and Setup


16.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-3-3 / IEC 61000-3-3 / BS EN 61000-3-3 (details referred to Sec 1.2)
Test Procedure:	refer to ISL QA -T4-E-S14
Observation period:	For Pst 10min
	For Plt 2 hours
Temperature:	24°C
Humidity:	57%

Test Procedure

The EUT is supplied in series with reference impedance from a power source with the voltage and frequency as the nominal supply voltage and frequency of the EUT.

16.1.2 Test Setup

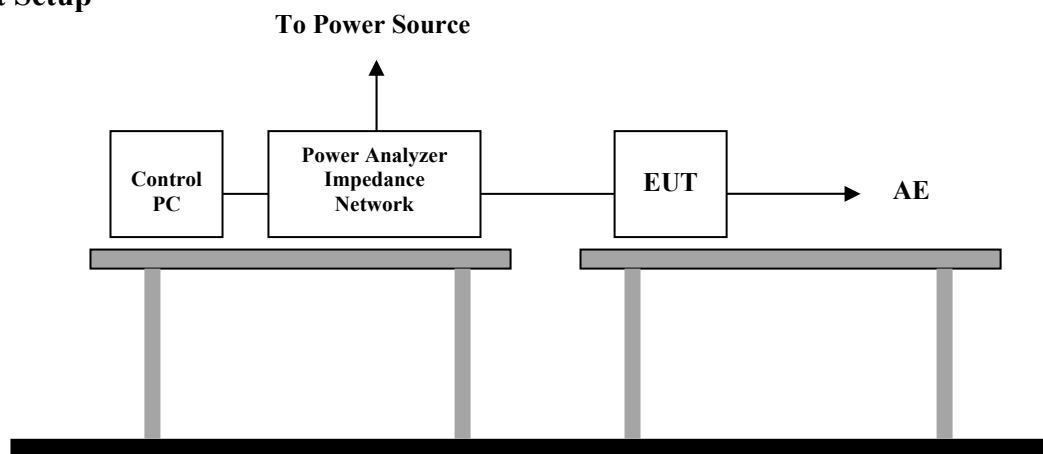

16.1.3 Test Result

Performance of EUT complies with the given specification.

16.2 Test Data: Configuration


Test File: F-20211020_2215
Test Standard: Test per IEC 61000-3-3 Ed. 3.1 : 2017
Test Class: Flicker Test, All Parameters
Test Result: PASS
Test Duration (min): 10

Source Qualification: Compliance with IEC61000-3-3

Phase A

Vrms (Volts):	230.85	Frequency (Hz):	50.00
I _{rms} (Amps):	0.305	Power (W):	56.7
V-THD (%):	0.373	T-Max (ms):	0 (500)
dmax (%):	0.000 (4.000)	Hi dmax (%):	0.000 (4.000)
dc (%):	0.000 (3.300)	Hi dc (%):	0.000 (3.300)
Pst-1 :	0.039 (1.000)		
Plt :	0.017 (0.650)		

Pst Spectrum

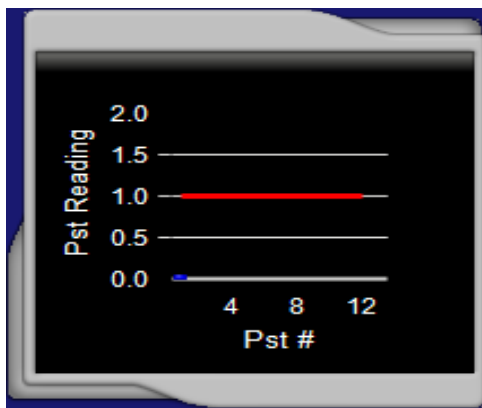

Plt Spectrum



16.3 Test Setup Photo



17. Appendix

17.1 Appendix A: Test Equipment

17.1.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction 04	EMI Receiver 18	ROHDE&SCHWARZ	ESCI	101392	06/08/2021	06/08/2022
Conduction 04	Loop Antenna Cable	BELDEN	URM76	URM76	01/08/2021	01/08/2022
Conduction 04	LISN 18	ROHDE & SCHWARZ	ENV216	101424	06/27/2021	06/27/2022
Conduction 04	LISN 03	R&S	ESH3-Z5	828874/010	11/05/2020	11/05/2021

Location Chmb12	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Radiation	BILOG Antenna 18	Schwarzbeck	Schwarzbeck VULB 9168+EMCI-N-6-05	646	03/15/2021	03/15/2022
Radiation	Preamplifier 26	EMCI	EMC9135	980297	03/02/2021	03/02/2022
Radiation	Coaxial Cable Chmb 12-10M-01	PEWC	CFD400-NL	Chmb 12-10M-01	10/13/2021	10/13/2022
Radiation	EMI Receiver 19	ROHDE & SCHWARZ	ESR 3	102460	07/21/2021	07/21/2022

Location Chmb14	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Rad. Above 1GHz	Spectrum Analyzer 25	R&S	FSV 40	101499	11/04/2020	11/04/2021
Rad. Above 1GHz	Horn Antenna 06	ETS-Lindgren	3117	00066665	12/01/2020	12/01/2021
Rad. Above 1GHz	Preamplifier 20	EMC INSTRUMENT	EMC051845	980084	11/19/2020	11/19/2021
Rad. Above 1GHz	Microwave Cable-11	HUBER SUHNER	SUCOFLEX 106	78034/6	03/02/2021	03/02/2022
Rad. Above 1GHz	Microwave Cable-26	EMCI	EMC104-NM-SM-800	141112	03/02/2021	03/02/2022

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
EN61K-4-2	ESD Gun 12	EM TEST	Dito	P1650188689	05/05/2021	05/05/2022
EN61K-4-3	Broadband Log-Periodic Antenna	AR	AT1080	310698	N/A	N/A
EN61K-4-3	Horn Antenna RF-01	AR	ATS700M11G	0335864	N/A	N/A
EN61K-4-3	Amplifier 80Mz~1GHz 250W	AR	250W1000A	312494	N/A	N/A
EN61K-4-3	Amplifier 800MHz~4.2GHz 50W	AR	50S1G4M1	312762	N/A	N/A
EN61K-4-3	Amplifier 4.0~8.0GHz 35W	AR	35S4G8AM1	0335752	N/A	N/A
EN61K-4-3	Broadband Coupler 80M~1GHz	Amplifier Research	DC6180A	0341805	N/A	N/A
EN61K-4-3	Coaxial Cable	INSULATED	NPS-4806-2360-NP3	108599.003.01.03	N/A	N/A
EN61K-4-3	Broadband Coupler 0.8G~4.26GHz	AR	DC7144A	0335226	N/A	N/A
EN61K-4-3	Broadband Coupler 4G~8GHz	AR	DC7350A	0335817	N/A	N/A
EN61K-4-3	Signal Generator 07	ROHDE&SCHWARZ	SMB100A	107780	11/29/2020	11/29/2021
EN61K-4-4	Signal Generator 10	EMC Partner	IMU3000	1547	09/01/2021	09/01/2022
EN61K-4-5	CDN-UTP8_ED3	EMC-PARTNER	CDN-UPT8	1509	03/30/2021	03/30/2022
EN61K-4-5	SURGE-TESTER	EMC Partner	MIG0603IN3	523	06/10/2021	06/10/2022
EN61K-4-6	CDN M2+M3 04	TESEQ	CDN M016	43257	09/01/2021	09/01/2022
EN61K-4-6	Coaxial Cable 4-6 02-1			4-6 02-1	N/A	N/A
EN61K-4-6	Conducted Immunity Test System 03	Frankonia	CIT-10-75	126B1151	01/08/2021	01/08/2022
EN61K-4-8	Magnetic Field Immunity Loop	FCC	F-1000-4-8-L-1 M	01037	05/31/2021	05/31/2022
EN61K-4-8	Magnetic Field Test Generator	FCC	F-1000-4-8-G-1 25A	01038	05/31/2021	05/31/2022
EN61K-4-11	Voltage Dip and UP Simulator 01	NoiseKen	VDS-2002	VDS0640162	09/17/2020	09/17/2021
EN61K-3-2/3, EN61K-3-11-12	Harmonics & Flickers Test System 04	PACIFIC*APS	ECTS2-3450F-n	550072	01/26/2021	01/26/2022

PS: N/A => The equipment does not need calibration.

****Software for Controlling Spectrum/Receiver and Calculating Test Data**

Test Item	Filename	Version
EN IEC 61000-3-2	HFa-16 Program	v1.0.0.5.6
EN 61000-3-3	HFa-16 Program	v1.0.0.5.6
EN 61000-4-2	N/A	2.0
EN 61000-4-3	i2	529b
EN 61000-4-4	TEM A3000	v4.6.1
EN 61000-4-5	EMC Partner	1.69
EN 61000-4-6	FRANKONIA CD-LAB	V5.221
EN 61000-4-8	N/A	
EN 61000-4-11(<16A)	NOISE KEN	2.0

Site	Filename	Version	Issue Date
Conduction/Radiation	EZ EMC	ISL-03A2	3/6/2013

17.2 Appendix B: Uncertainty of Measurement

The laboratory measurement uncertainty accordance with refers to CISPR 16-4-2. If U_{lab} is less than or equal to U_{cisp} in Table 1, then the test report may either state the value of U_{lab} or state that U_{lab} is less than U_{cisp} .

The coverage factor $k = 2$ yields approximately a 95 % level of confidence.

<Conduction 04>

AMN: $\pm 2.90\text{dB}$

<Chamber 12 (10m)>

Horizontal

30MHz~200MHz: $\pm 4.14\text{dB}$

200MHz~1000MHz: $\pm 4.12\text{dB}$

Vertical

30MHz~200MHz: $\pm 4.30\text{dB}$

200MHz~1000MHz: $\pm 4.45\text{dB}$

<Chamber 14 (3m)>

1GHz~6GHz: $\pm 4.93\text{dB}$

<Immunity 02>

Test item	Uncertainty	Test item	Uncertainty
EN 61000-4-2 (ESD)		EN 61000-4-6 (CS)	
Rise time tr	$\leq 9.81\%$	CDN	$\pm 1.74\text{dB}$
Peak current Ip	$\leq 5.54\%$	EM Clamp	$\pm 3.36\text{dB}$
current at 30 ns	$\leq 5.55\%$	EN 61000-4-8 (Magnetic)	$\pm 6.53\%$
current at 60 ns	$\leq 5.55\%$	EN 61000-4-11 (Dips)	$\pm 2.41\%$
EN 61000-4-3 (RS)	$\pm 1.89\text{dB}$	EN IEC 61000-3-2 (Harmonics)	$\pm 1.29\%$
EN 61000-4-4 (EFT)		EN 61000-3-3 (Fluctuations and Flicker)	$\pm 6.8\%$
voltage rise time (tr)	$\pm 5.1\%$		
peak voltage value (VP)	$\pm 6.39\%$		
voltage pulse width (tw)	$\pm 5.0\%$		
EN 61000-4-5 (Surge)			
open-circuit voltage front time	$\pm 13.5\%$		
open-circuit voltage peak value	$\pm 6.6\%$		
open-circuit voltage duration (Td)	$53.33\mu\text{s}$		

17.3 Appendix C: Photographs of EUT

Please refer to the File of **ISL-21LE801P-MD**

--- END ---