

TEST REPORT

of

**EN 55032 / CISPR 32 / BS EN 55032
AS/NZS CISPR 32 Class B
EN 55035 / CISPR 35 / BS EN 55035 IMMUNITY
EN IEC 61000-3-2 / BS EN IEC 61000-3-2
EN 61000-3-3 / BS EN 61000-3-3**

Product: **USB 2.0 8GB~128GB**
Main Model: **DS7016-04G**
Series Model: **DS7016-08G; DS7016-16G; DS7016-32G; DS7016-64G;
DS7016-128G; D02002-8G; D02002-16G; D02002-32G;
D02002-64G; D02002-128G**
Brand: **DATO**
Applicant: **DATOTEK INTERNATIONAL Co., Ltd.**
Address: **No. 34, Alley 18, Lane 478, Rueiguang Rd., Neihu District,
Taipei, Taiwan**

Test Performed by:



International Standards Laboratory Corp. LT Lab.

TEL: +886-3-263-8888 FAX: +886-3-263-8899

No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan

Report No.: **ISL-22LE0543CE35-MD**
Issue Date : **March 31, 2025**



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein. According to customer agreement, the laboratory issues test reports based on the regulations or standards specifications, the measurement uncertainty is not considered in conformity decision rules. This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.


Contents of Report

1.	General.....	1
1.1	Certification of Accuracy of Test Data.....	1
1.2	Test Standards.....	2
1.3	Description of EUT	5
1.4	Description of Support Equipment	6
1.5	Software for Controlling Support Unit.....	7
1.6	I/O Cable Condition of EUT and Support Units	8
2.	Power Main Port Conducted Emissions	9
2.1	Test Setup and Procedure	9
2.2	Conduction Test Data: Configuration 1.....	11
2.3	Conduction Test Data: Configuration 2.....	13
2.4	Conduction Test Data: Configuration 3.....	15
2.5	Conduction Test Data: Configuration 4.....	17
2.6	Test Setup Photo.....	19
3.	Telecommunication Port Conducted Emissions	27
3.1	Test Setup and Procedure	27
4.	Radiated Disturbance Emissions.....	29
4.1	Test Setup and Procedure	29
4.2	Limit	31
4.3	Radiation Test Data: Configuration 1.....	33
4.4	Radiation Test Data: Configuration 2.....	37
4.5	Radiation Test Data: Configuration 3.....	41
4.6	Radiation Test Data: Configuration 4.....	45
4.7	Test Setup Photo.....	49
5.	Voltage Disturbance Emissions at Antenna Terminals	57
5.1	Test Setup and Procedure	57
6.	Differential Voltage Emissions.....	59
6.1	Test Setup and Procedure	59
7.	Outdoor units of home satellite receiving systems	61
7.1	Test Setup and Procedure	61
8.	Electrostatic discharge (ESD) immunity	63
8.1	Test Specification and Setup	63
8.2	Test Point: Configuration 1	64
8.3	Test Point: Configuration 2	65
8.4	Test Point: Configuration 3	66
8.5	Test Point: Configuration 4	67
8.6	Test Setup Photo.....	68
9.	Radio-Frequency, Electromagnetic Field immunity.....	70
9.1	Test Specification and Setup	70
9.2	Test Setup Photo.....	71
10.	Electrical Fast transients/burst immunity.....	73
10.1	Test Specification and Setup	73
10.2	Test Setup Photo.....	75

11.	Surge Immunity	77
11.1	Test Specification and Setup	77
11.2	Test Setup Photo.....	78
12.	Immunity to Conductive Disturbance	80
12.1	Test Specification and Setup	80
12.2	Test Setup Photo.....	81
13.	Power Frequency Magnetic Field immunity.....	83
13.1	Test Specification and Setup	83
13.2	Test Setup Photo.....	84
14.	Voltage Dips, Short Interruption and Voltage Variation immunity	86
14.1	Test Specification and Setup	86
14.2	Test Setup Photo.....	87
15.	Harmonics	89
15.1	Test Specification and Setup	89
16.	Voltage Fluctuations	91
16.1	Test Specification and Setup	91
16.2	Test Data: Configuration 1	92
16.3	Test Data: Configuration 2	93
16.4	Test Data: Configuration 3.....	94
16.5	Test Data: Configuration 4.....	95
16.6	Test Setup Photo.....	96
17.	Appendix.....	98
17.1	Appendix A: Test Equipment.....	98
17.2	Appendix B: Uncertainty of Measurement	101
17.3	Appendix C: Photographs of EUT	103

1. General

1.1 Certification of Accuracy of Test Data

Standards:	Please refer to 1.2
Equipment Tested:	USB 2.0 8GB~128GB
Main Model:	DS7016-04G
Series Model:	DS7016-08G; DS7016-16G; DS7016-32G; DS7016-64G; DS7016-128G; D02002-8G; D02002-16G; D02002-32G; D02002-64G; D02002-128G
Brand:	DATO
Applicant:	DATOTEK INTERNATIONAL Co., Ltd.
Sample received Date:	July 8, 2022
Final test Date:	EMI: refer to the date of test data EMS: July 26, 2022
Test Site:	Chamber 02; Chamber 14; Conduction 02; Immunity 02
Test Distance:	10m; 3m (above 1GHz) (EMI test)
Temperature:	refer to each site test data
Humidity:	refer to each site test data
Atmospheric Pressure:	86 kPa to 106 kPa
Input power:	Conduction input power: AC 230 V / 50 Hz Radiation input power: AC 230 V / 50 Hz Immunity input power: AC 230 V / 50 Hz
Test Result:	PASS
Report Engineer:	Cheryl Tung
Test Engineer:	 Jovi Liu
Approved By:	 Angus Chu / Sr. Manager

1.2 Test Standards

The tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp. in accordance with the following

EN 55032:2015+A11:2020 and EN 55032:2015+A1:2020 and CISPR 32:2015+A1:2019 and BS EN 55032:2015+A11:2020 and BS EN 55032:2015+A1:2020 Class B Electromagnetic compatibility of multimedia equipment - Emission requirements.

AS/NZS CISPR 32:2015+A1:2020 Class B Electromagnetic compatibility of multimedia equipment- Emission requirements

Performed Item	Test Performed	Deviation	Result
Conducted emissions from the AC mains power ports	Yes	No	PASS
Telecommunication Port Conducted Emissions (asymmetric mode)	N/A	N/A	N/A
Radiated emissions at frequencies below 1 GHz	Yes	No	PASS
Radiated emissions at frequencies above 1 GHz	Yes	No	PASS
Radiated emissions from FM receivers	N/A	N/A	N/A
Voltage Disturbance Emissions at Antenna Terminals	N/A	N/A	N/A
Differential voltage emissions	N/A	N/A	N/A
Outdoor units of home satellite receiving systems	N/A	N/A	N/A

EN 55035:2017+A11:2020 and CISPR 35:2016 modified and BS EN 55035: 2017+A11:2020
Electromagnetic compatibility of multimedia equipment - Immunity requirements.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008 BS EN 61000-4-2:2009	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010 BS EN 61000-4-3:2006+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4:2012 IEC 61000-4-4:2012 BS EN 61000-4-4:2012	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5:2014+A1:2017 IEC 61000-4-5:2014+A1:2017 BS EN 61000-4-5:2014+A1:2017	Surge	Pass	B
EN 61000-4-6:2014+AC:2015 IEC 61000-4-6:2013 BS EN 61000-4-6:2014	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009 BS EN 61000-4-8:2010	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11:2004+A1:2017 IEC 61000-4-11:2004+A1:2017 BS EN 61000-4-11:2004+A1:2017	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 cycle	Pass	B
	30% in 25 cycle	Pass	C
	>95% in 250 cycle	Pass	C

Standard	Description	Results
EN IEC 61000-3-2:2019 IEC 61000-3-2:2018 BS EN IEC 61000-3-2:2019	Limits for harmonics current emissions	Pass
EN 61000-3-3:2013+A1:2019 IEC 61000-3-3:2013+A1:2017 BS EN 61000-3-3:2013+A1:2019	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

1.2.1 Performance Criteria for Compliance: EN 55035 and BS EN 55035

Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

1.3 Description of EUT

EUT

This report test data using the report number ISL-22LE0543CE35

Description	USB 2.0 8GB~128GB
Condition	Pre-Production
Main Model	DS7016-04G
Serial Model	DS7016-08G; DS7016-16G; DS7016-32G; DS7016-64G; DS7016-128G; D02002-8G; D02002-16G; D02002-32G; D02002-64G; D02002-128G
Serial Number	N/A
Power	From Personal Computer Supply
Control IC	PS2251-70
PCB Number	PG-MS-011-5674-EN; PG-MS-011-5671-EN; 1000420031
Memory Capacity	1GB~64GB
Highest Working Frequency	5GHz

The memory capacities listed below is chosen by the applicant to be the representative configuration for testing in this report.

Test configurations:

Configuration	Control IC	PCB Number	Memory Capacity	Mode
1	PS2251-70	PG-MS-011-5674-EN	64GB	METAL USB
2				METAL Micro USB
3				PLASTIC USB
4				PLASTIC Micro USB

EMI Noise Source:

refer to the photo	Control IC
EUT-9	PS2251-70

EMI Solution:

Refer to the photo	Materials	Spec(L*W*H) (mm)	Manufacturer	Point
EUT-10	Shielded tape	6 * 1 * 2	Laird	1

1.4 Description of Support Equipment

For Config1 、 3 test Configuration Support unit: 1~6

For Config2 、 4 test Configuration Support unit: 1~7

No	Unit	Model / Serial No.	Brand	Power Cord	FCC ID
1	LCD Monitor	U2412M S/N: N/A	DELL	Non-shielded	FCC DOC
2	PS/2 Keyboard	Y-S0002 S/N: N/A	Logitech	N/A	FCC DOC
3	PS/2 Mouse	M-SBM96B S/N: N/A	Logitech	N/A	FCC DOC
4	Printer	C930 S/N: N/A	HP	Non-shielded	FCC DOC
5	Modem	DM1414 S/N: N/A	Aceex	Non-shielded	FCC DOC
6	Personal Computer	HP ProDesk 400 G3 MT S/N: N/A	HP	Non-shielded	FCC DOC
7	Micro plug	N/A S/N: N/A	N/A	N/A	N/A

1.5 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

1. PC running Winthrax to read and write the EUT.
2. Send signal to the Printer through PC USB Port.
3. Send signal to the Modem through PC Serial Port.
4. Send Color Bar to the LCD Monitor through PC D-SUB Port.
5. Repeat the above steps.

	Filename	Version
EUT	Winthrax	3.09.02
LCD Monitor	Windows Media Player	12.0
Printer	IntelEMC	1.1
Modem	IntelEMC	1.1


1.6 I/O Cable Condition of EUT and Support Units

Description	Path	Length	Shielding	Core	Remark
AC Power Cable	100V (~240V) to PC SPS	1.8m	No	No	
Monitor Cable	Monitor D-SUB Port to PC D-SUB Port	1.8m	Yes	Yes	
Keyboard Cable	PS/2 Keyboard to PC PS/2 Port	1.8m	Yes	No	
Mouse Cable	PS/2 Mouse to PC PS/2 Port	1.8m	Yes	No	
Printer Cable	Printer to PC USB Port	1.8m	Yes	No	
Modem Cable	Modem to PC Serial Port	1.8m	Yes	No	

2. Power Main Port Conducted Emissions

2.1 Test Setup and Procedure

2.1.1 Test Setup

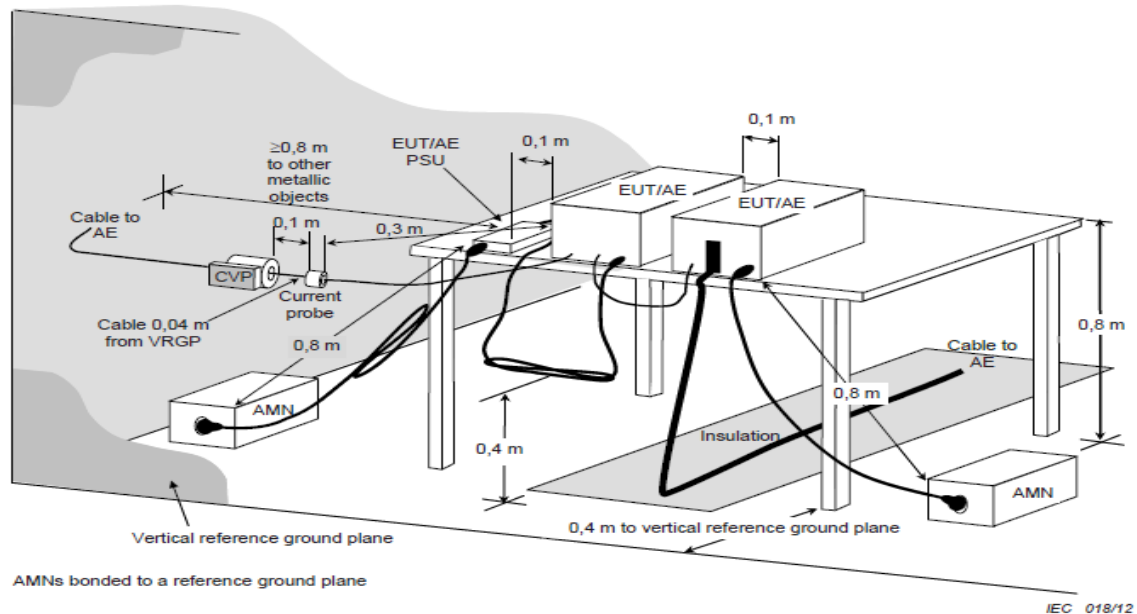

2.1.2 Test Procedure

The measurements are performed in a shielded room test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the AMN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the AMNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second AMN through a ganged, metal power outlet box which is bonded to the ground plane at the AMN.

The interconnecting cables were arranged and moved to get the maximum measurement. Both the line of power cord, live and neutral, were measured. All of the interface cables were manipulated according to EN 55032 / BS EN 55032 requirements.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

2.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150kHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9kHz

2.1.4 Limit

Conducted emissions from the AC mains power ports of Class_A equipment:


Frequency	QP	AV
MHz	dB(μ V)	dB(μ V)
0.15-0.50	79	66
0.50-30	73	60
Note: The lower limit shall apply at the transition frequencies		

Conducted emissions from the AC mains power ports of Class_B equipment:

Frequency	QP	AV
MHz	dB(μ V)	dB(μ V)
0.15-0.50	66-56	56-46
0.50-5.0	56	46
5.0-30	60	50
Note: The lower limit shall apply at the transition frequencies		

2.2 Conduction Test Data: Configuration 1

-Live

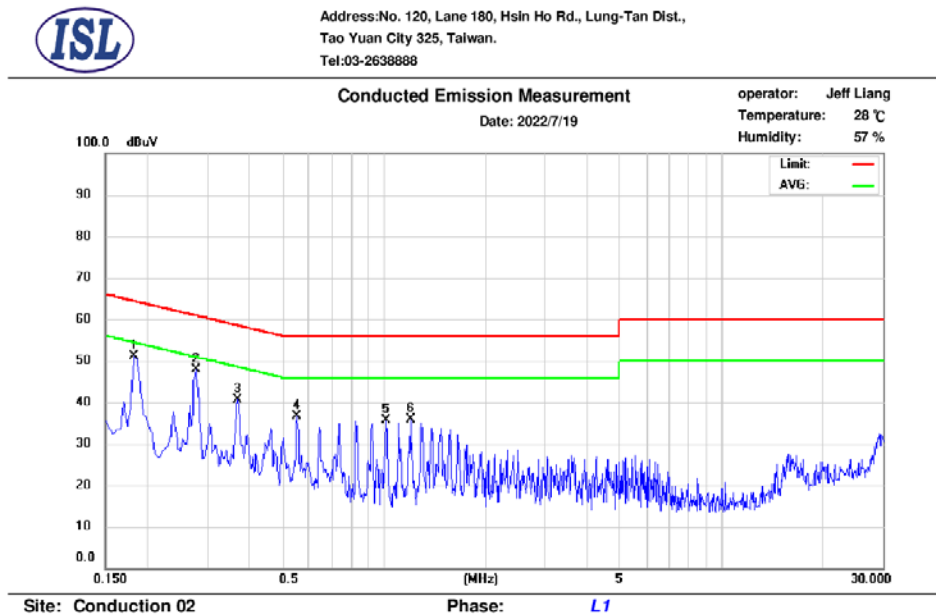

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.182	39.90	35.15	9.67	49.57	64.39	-14.82	44.82	54.39	-9.57
2	0.278	37.68	36.21	9.67	47.35	60.88	-13.53	45.88	50.88	-5.00
3	0.370	31.36	28.61	9.68	41.04	58.50	-17.46	38.29	48.50	-10.21
4	0.554	26.13	24.90	9.68	35.81	56.00	-20.19	34.58	46.00	-11.42
5	1.018	22.81	20.92	9.70	32.51	56.00	-23.49	30.62	46.00	-15.38
6	1.198	23.50	21.51	9.71	33.21	56.00	-22.79	31.22	46.00	-14.78

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor


Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

- Neutral

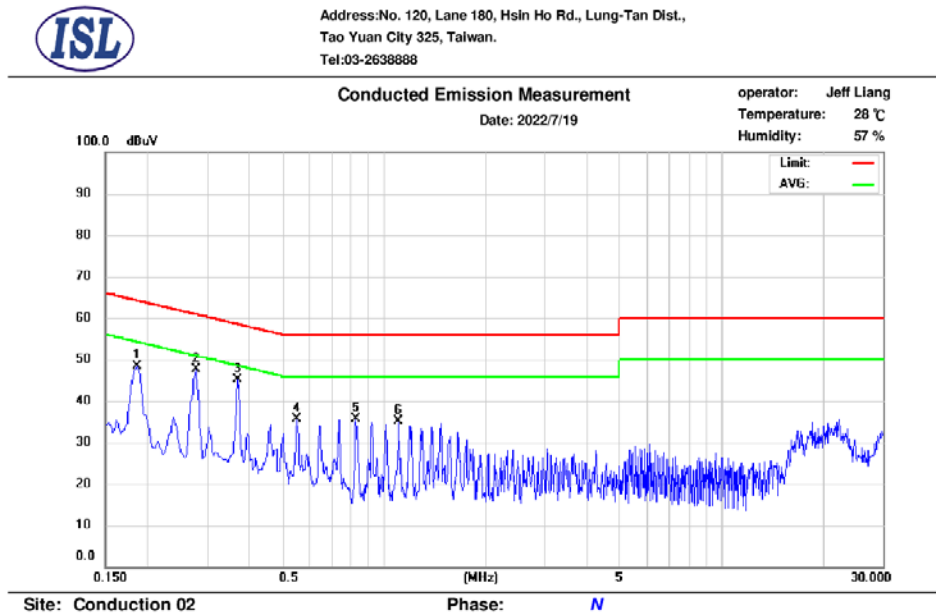

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.186	42.06	37.00	9.67	51.73	64.21	-12.48	46.67	54.21	-7.54
2	0.278	37.68	36.05	9.67	47.35	60.88	-13.53	45.72	50.88	-5.16
3	0.370	31.18	28.06	9.67	40.85	58.50	-17.65	37.73	48.50	-10.77
4	0.554	25.95	24.56	9.67	35.62	56.00	-20.38	34.23	46.00	-11.77
5	0.830	24.38	23.34	9.70	34.08	56.00	-21.92	33.04	46.00	-12.96
6	1.110	23.28	21.86	9.70	32.98	56.00	-23.02	31.56	46.00	-14.44

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

2.3 Conduction Test Data: Configuration 2

-Live

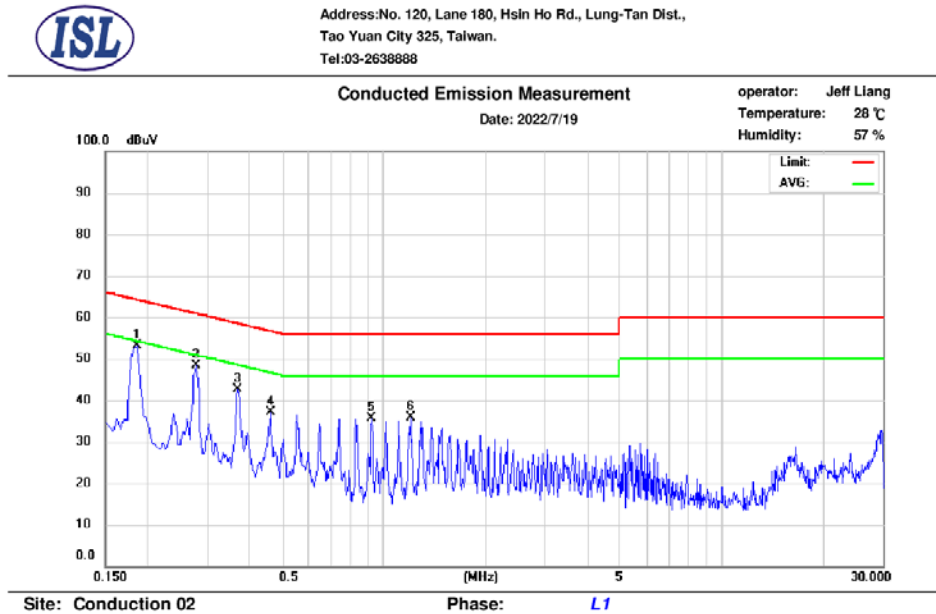

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.186	42.02	36.85	9.67	51.69	64.21	-12.52	46.52	54.21	-7.69
2	0.278	38.13	36.59	9.67	47.80	60.88	-13.08	46.26	50.88	-4.62
3	0.370	31.74	28.56	9.68	41.42	58.50	-17.08	38.24	48.50	-10.26
4	0.462	25.32	22.92	9.68	35.00	56.66	-21.66	32.60	46.66	-14.06
5	0.922	24.91	24.01	9.70	34.61	56.00	-21.39	33.71	46.00	-12.29
6	1.198	24.30	22.51	9.71	34.01	56.00	-21.99	32.22	46.00	-13.78

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor


Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

- Neutral

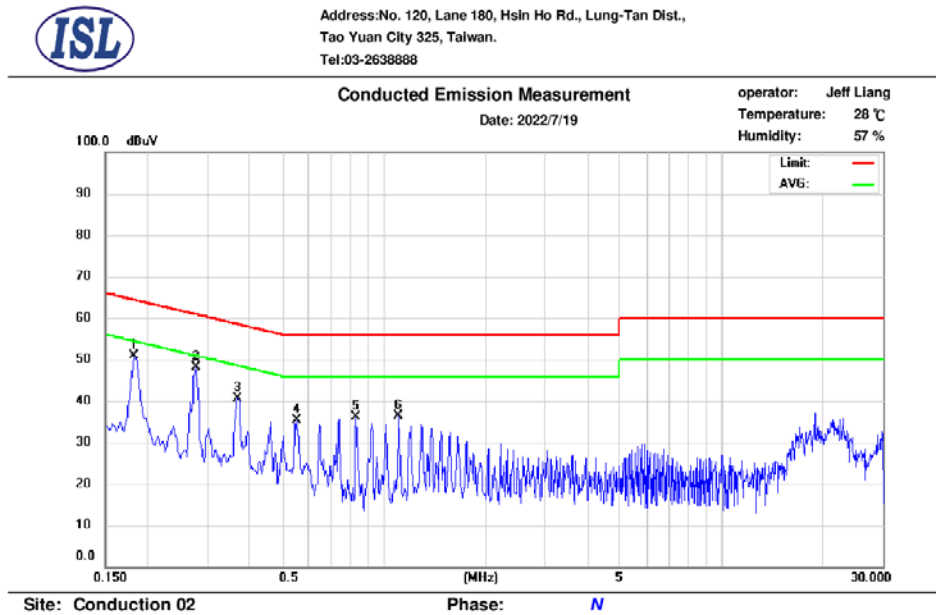

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.182	41.36	36.42	9.67	51.03	64.39	-13.36	46.09	54.39	-8.30
2	0.278	38.05	36.42	9.67	47.72	60.88	-13.16	46.09	50.88	-4.79
3	0.370	31.63	28.31	9.67	41.30	58.50	-17.20	37.98	48.50	-10.52
4	0.554	25.87	24.51	9.67	35.54	56.00	-20.46	34.18	46.00	-11.82
5	0.830	24.69	23.68	9.70	34.39	56.00	-21.61	33.38	46.00	-12.62
6	1.106	24.77	23.70	9.70	34.47	56.00	-21.53	33.40	46.00	-12.60

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

2.4 Conduction Test Data: Configuration 3

-Live

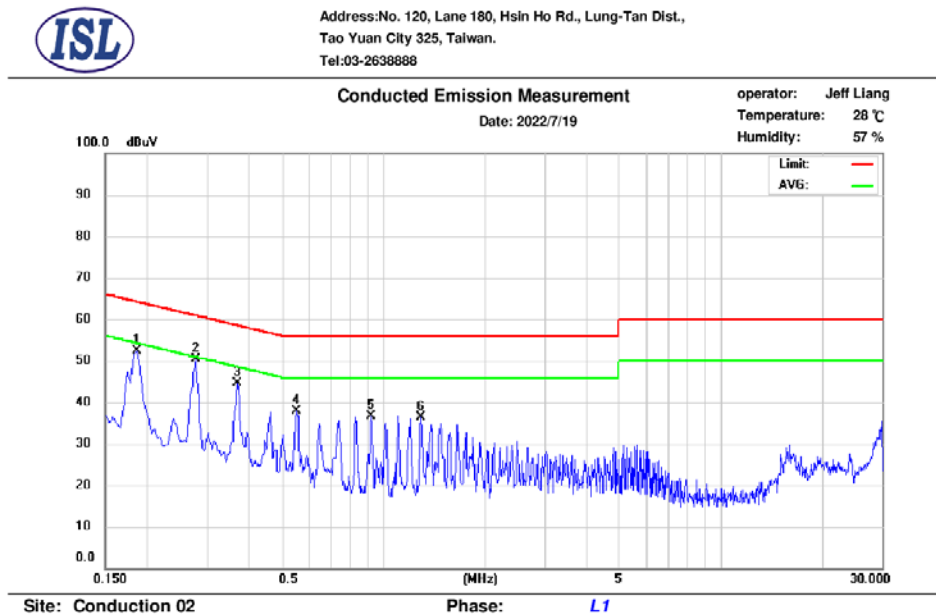

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.186	42.71	37.87	9.67	52.38	64.21	-11.83	47.54	54.21	-6.67
2	0.278	38.86	36.88	9.67	48.53	60.88	-12.35	46.55	50.88	-4.33
3	0.370	32.87	31.01	9.68	42.55	58.50	-15.95	40.69	48.50	-7.81
4	0.554	26.77	25.52	9.68	36.45	56.00	-19.55	35.20	46.00	-10.80
5	0.922	25.25	23.91	9.70	34.95	56.00	-21.05	33.61	46.00	-12.39
6	1.290	25.27	23.66	9.72	34.99	56.00	-21.01	33.38	46.00	-12.62

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor


Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

- Neutral

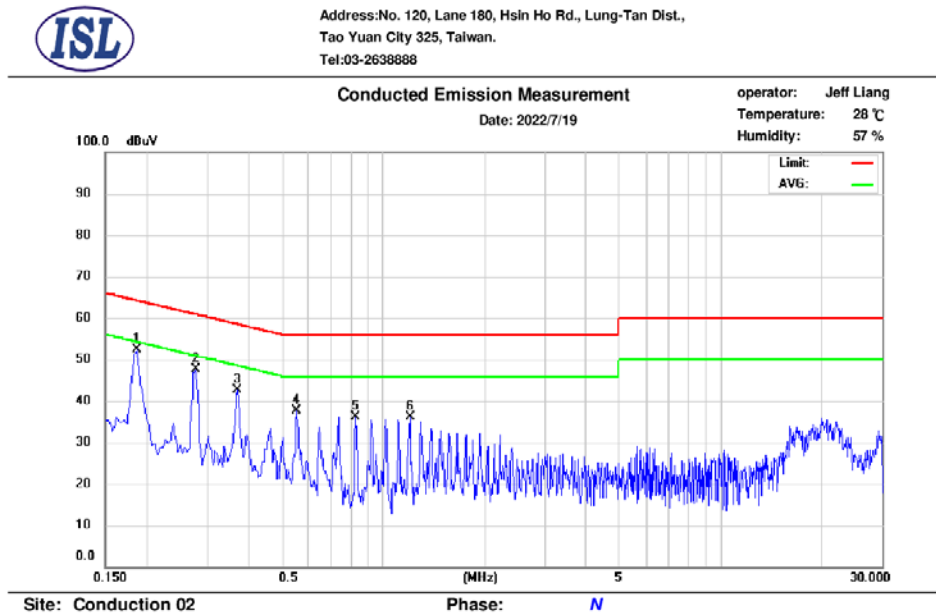

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.186	41.81	38.40	9.67	51.48	64.21	-12.73	48.07	54.21	-6.14
2	0.278	37.57	35.67	9.67	47.24	60.88	-13.64	45.34	50.88	-5.54
3	0.370	32.50	29.58	9.67	42.17	58.50	-16.33	39.25	48.50	-9.25
4	0.554	26.53	25.26	9.67	36.20	56.00	-19.80	34.93	46.00	-11.07
5	0.830	25.28	24.13	9.70	34.98	56.00	-21.02	33.83	46.00	-12.17
6	1.198	25.13	23.22	9.71	34.84	56.00	-21.16	32.93	46.00	-13.07

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

2.5 Conduction Test Data: Configuration 4

-Live

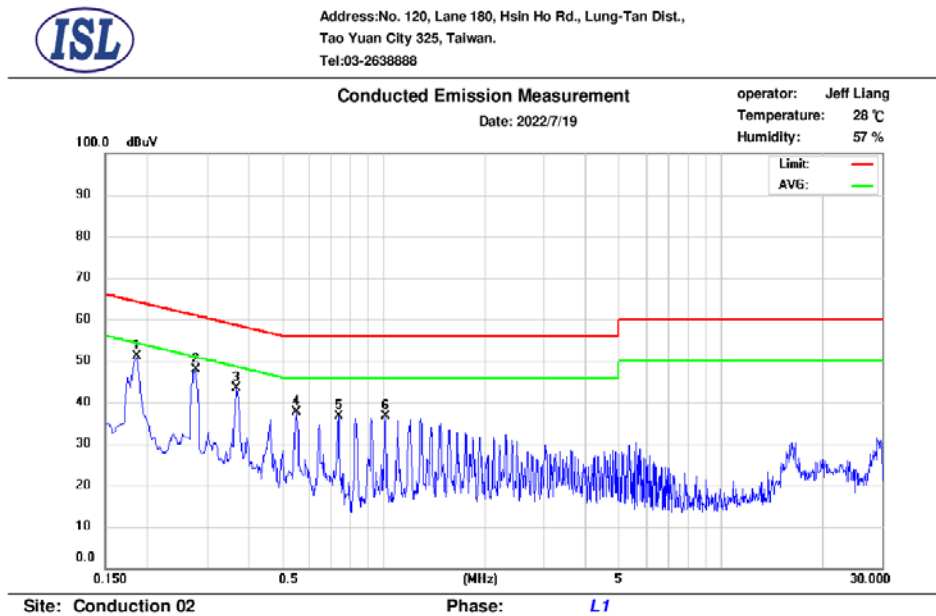

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.186	41.81	38.41	9.67	51.48	64.21	-12.73	48.08	54.21	-6.13
2	0.278	38.10	36.17	9.67	47.77	60.88	-13.11	45.84	50.88	-5.04
3	0.366	31.27	29.20	9.68	40.95	58.59	-17.64	38.88	48.59	-9.71
4	0.554	27.02	25.76	9.68	36.70	56.00	-19.30	35.44	46.00	-10.56
5	0.738	26.04	25.09	9.69	35.73	56.00	-20.27	34.78	46.00	-11.22
6	1.014	25.70	24.25	9.70	35.40	56.00	-20.60	33.95	46.00	-12.05

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor


Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

- Neutral

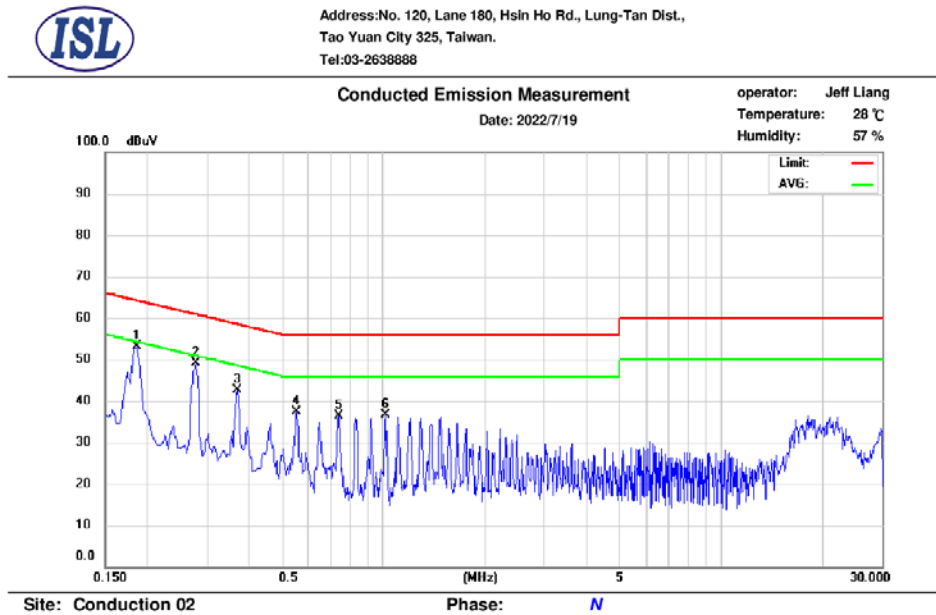

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.186	42.21	38.79	9.67	51.88	64.21	-12.33	48.46	54.21	-5.75
2	0.278	37.96	35.89	9.67	47.63	60.88	-13.25	45.56	50.88	-5.32
3	0.370	32.89	30.00	9.67	42.56	58.50	-15.94	39.67	48.50	-8.83
4	0.554	26.80	25.41	9.67	36.47	56.00	-19.53	35.08	46.00	-10.92
5	0.738	25.64	24.62	9.69	35.33	56.00	-20.67	34.31	46.00	-11.69
6	1.014	25.64	24.10	9.70	35.34	56.00	-20.66	33.80	46.00	-12.20

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor

Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.



If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

2.6 Test Setup Photo

Configuration 1
Front View



Back View

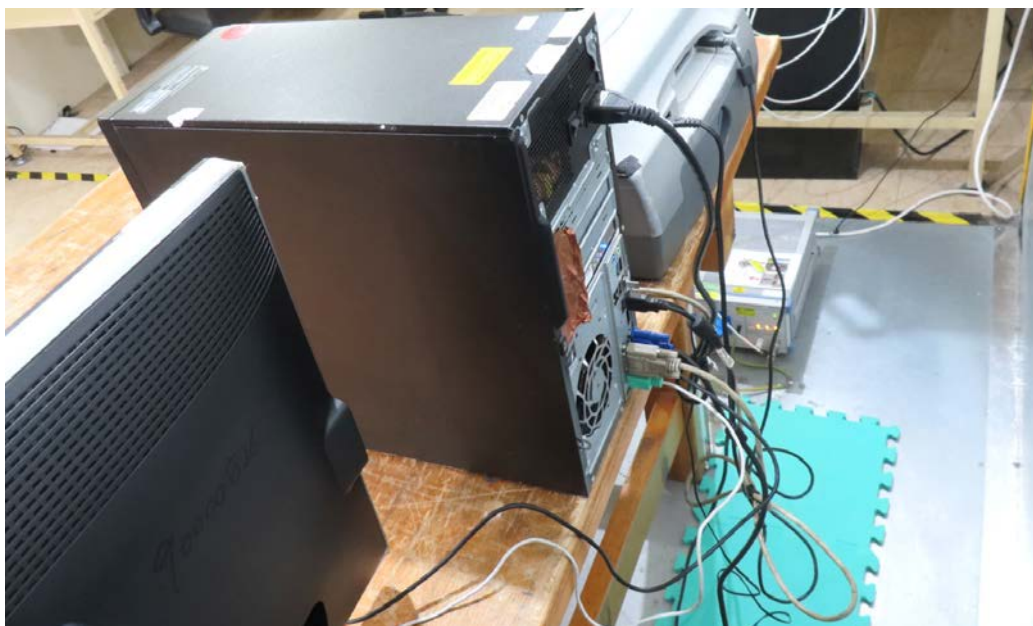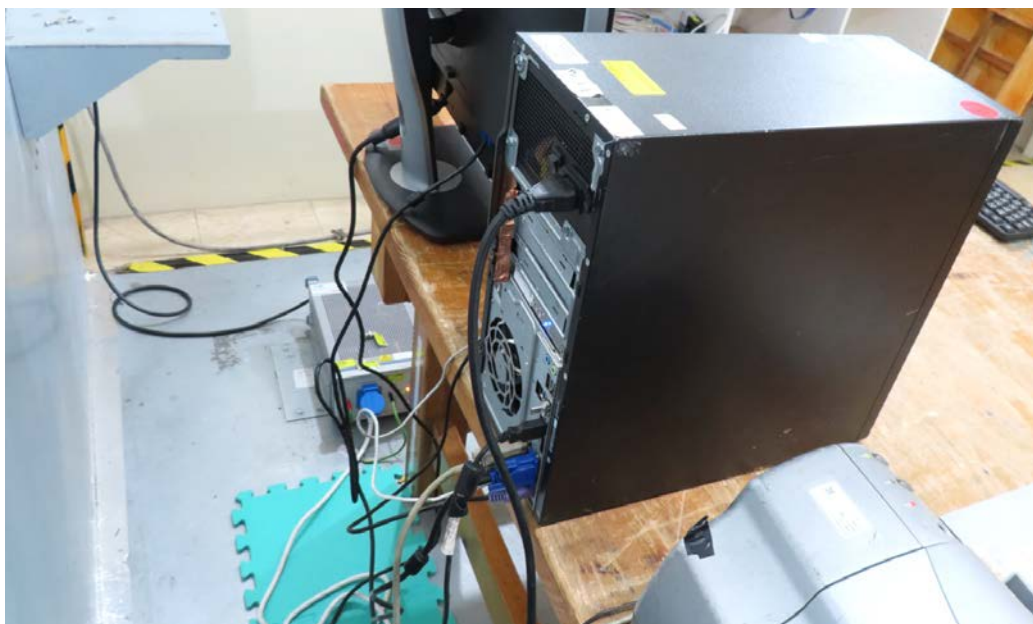

Configuration 2
Front View



Back View



Configuration 3
Front View




Back View



Configuration 4
Front View




Back View

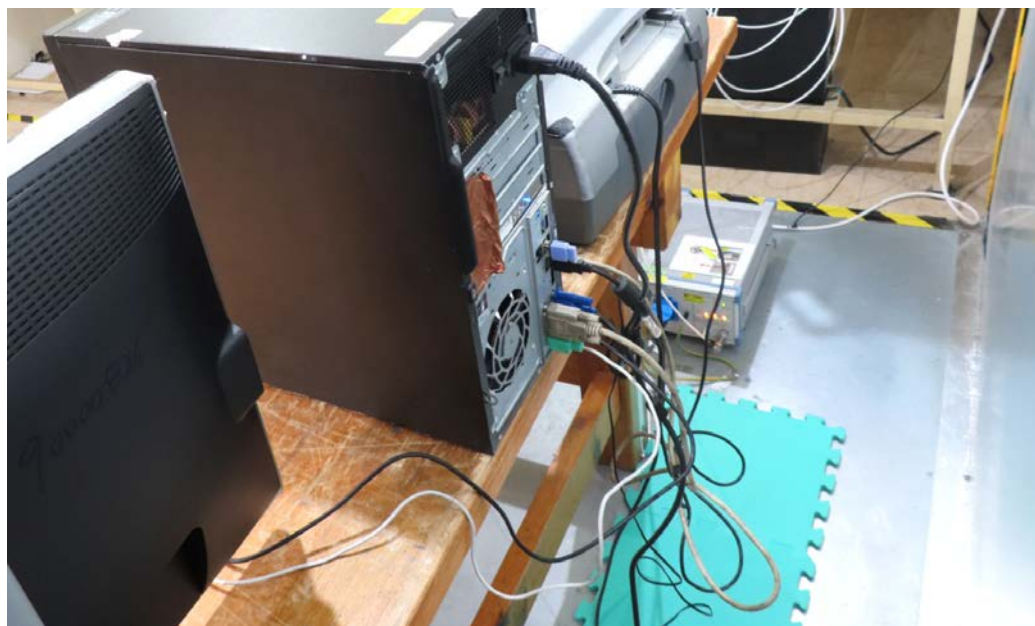

3. Telecommunication Port Conducted Emissions

3.1 Test Setup and Procedure

3.1.1 Test Setup

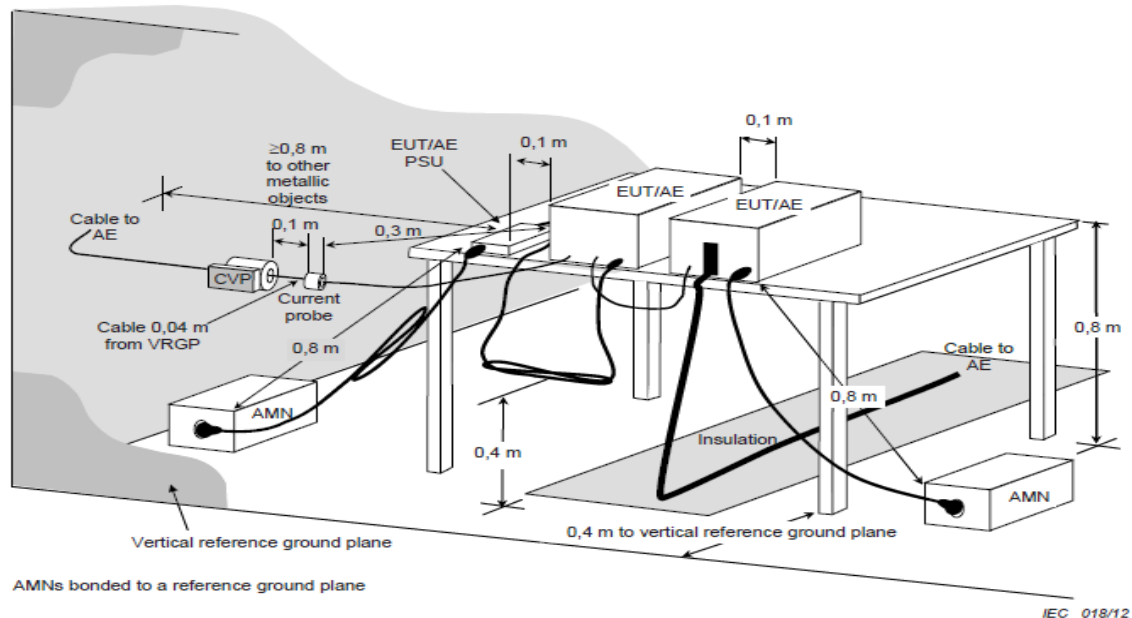

3.1.2 Test Procedure

The measurements are performed in a shielded room test site. The EUT was placed on non-conducting 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

The EUT, any support equipment, and any interconnecting cables were arranged and moved to get the maximum measurement. All of the interface cables were manipulated according to EN 55032 / BS EN 55032 requirements.

The port of the EUT was connected to the support equipment through the AAN and linked in normal condition.

AC input power for the EUT & the support equipment power outlets were obtained from the same filtered source that provided input power to the AMN.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information could be useful in reducing their amplitude.

3.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150kHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9kHz

3.1.4 Limit

Asymmetric mode conducted emissions from Class_A equipment:

Applicable to

1. wired network ports.
2. optical fiber ports with metallic shield or tension members.
3. antenna ports.

Frequency range MHz	Coupling device	Detector type / bandwidth	Class_A voltage limits dB(μV)	Class_A current limits dB(μA)
0.15-0.5	AAN	Quasi Peak / 9 kHz	97-87	n/a
0.5-30			87	
0.15-0.5	AAN	Average / 9 kHz	84-74	
0.5-30			74	
0.15-0.5	CVP and current probe	Quasi Peak / 9 kHz	97-87	53-43
0.5-30			87	43
0.15-0.5	CVP and current probe	Average / 9 kHz	84-74	40-30
0.5-30			74	30
0.15-0.5	Current Probe	Quasi Peak / 9 kHz	n/a	53-43
0.5-30				43
0.15-0.5	Current Probe	Average / 9 kHz		40-30
0.5-30				30

Asymmetric mode conducted emissions from Class_B equipment:


Applicable to:

1. wired network ports.
2. optical fiber ports with metallic shield or tension members.
3. broadcast receiver tuner ports.
4. antenna ports.

Frequency range MHz	Coupling device	Detector type / bandwidth	Class_B voltage limits dB(μV)	Class_B current limits dB(μA)
0.15-0.5	AAN	Quasi Peak / 9 kHz	84-74	n/a
0.5-30			74	
0.15-0.5	AAN	Average / 9 kHz	74-64	
0.5-30			64	
0.15-0.5	CVP and current probe	Quasi Peak / 9 kHz	84-74	40-30
0.5-30			74	30
0.15-0.5	CVP and current probe	Average / 9 kHz	74-64	30-20
0.5-30			64	20
0.15-0.5	Current Probe	Quasi Peak / 9 kHz	n/a	40-30
0.5-30				30
0.15-0.5	Current Probe	Average / 9 kHz		30-20
0.5-30				20

****Remarks: It is not necessary to be tested on this item.**

4.1 Test Setup and Procedure

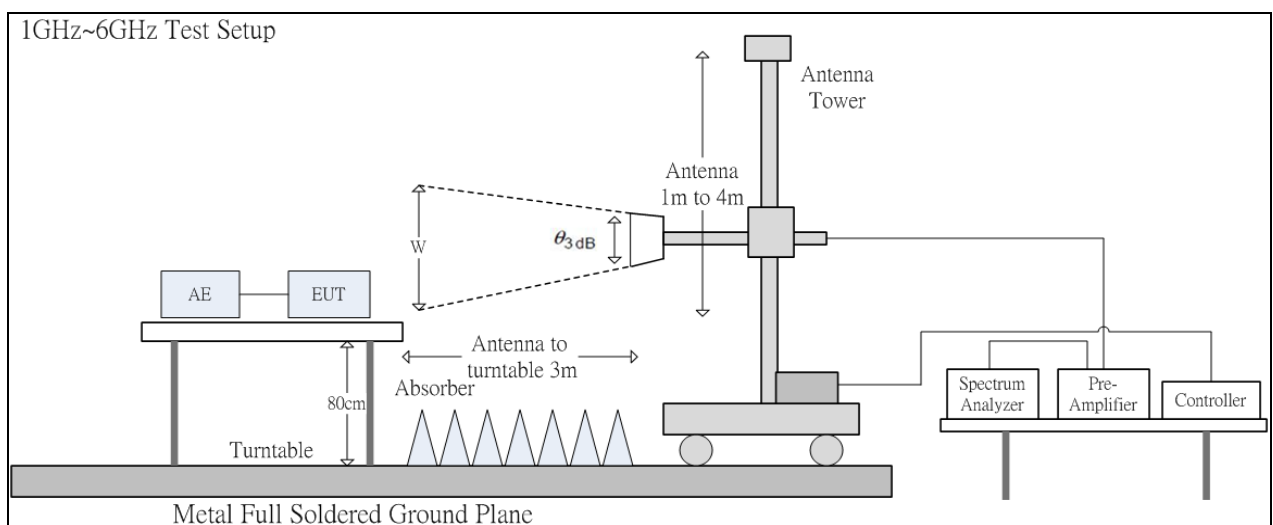

The 3dB beam width of the horn antenna used for the test is as shown in the table below.

Frequency (GHz)	E-plane	H-plane	$\theta_{3dB}(\text{min})$	d= 3 m
				w (m)
1	88°	147°	88°	5.79
2	68°	119°	68°	4.04
3	73°	92°	73°	4.44
4	70°	89°	70°	4.20
5	55°	60°	55°	3.12
6	63°	62°	62°	3.60

4.1.2 Test Procedure

The radiated emissions test will then be repeated on the chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of 10 meter chamber. Desktop EUT are set up on a FRP stand 0.8 meter above the ground or floor-standing arrangement shall be placed on the horizontal ground reference plane.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The highest emissions between 1 GHz to 6 GHz were analyzed in details by operating the spectrum analyzer in peak and average mode to determine the precise amplitude of the emissions. The test volume for a height of up to 30 cm may be obstructed by absorber placed on the ground plane.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings. All of the interface cables were manipulated according to EN 55032 / BS EN 55032 requirements.

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.

If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

4.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 30MHz--1000MHz
 Detector Function: Quasi-Peak Mode
 Resolution Bandwidth: 120kHz

Frequency Range: Above 1 GHz to 6 GHz
 Detector Function: Peak/Average Mode
 Resolution Bandwidth: 1MHz

4.2 Limit

Radiated emissions at frequencies up to 1 GHz for Class_A equipment:

Radiated emissions at frequencies up to 1 GHz for Class A equipment:			
Frequency range MHz	Measurement		Class_A limits dB(μV/m)
	Distance m	Detector type / bandwidth	OATS/SAC
30-230	10	Quasi Peak / 120 kHz	40
230-1000			47
30-230	3		50
230-1000			57

Radiated emissions at frequencies above 1 GHz for Class_A equipment of the EN 55032:2015+A11:2020:

Frequency range MHz	Measurement		Class_A limits dB(μ V/m)
	Distance m	Detector type / bandwidth	FSOATS
1000-3000	3	Average / 1MHz	56
3000-6000			60
1000-3000		Peak / 1MHz	76
3000-6000			80

Radiated emissions at frequencies above 1 GHz for Class_A equipment of the EN 55032:2015+A11:2020:

Frequency range MHz	Measurement		Class_A limits dB(μ V/m)
	Distance m	Detector type / bandwidth	FSOATS
1000-6000	3	Average / 1MHz	60
1000-6000		Peak / 1MHz	80

Note 1: The radiated emissions at frequencies above 1 GHz test limit in this report is based on EN 55032:2015+A11:2020.

Note 2: Test data in this report has been taken against the EN 55032:2015+A11:2020 limit as it is the most stringent limit. By complying with the more restrictive EN 5032:2015+A11:2020 limit compliance with the EN 55032:2015+A1:2020 limit is also demonstrated.

Radiated emissions at frequencies up to 1 GHz for Class_B equipment:

Radiated emissions at frequencies up to 1 GHz for Class_B equipment.			
Frequency range MHz	Measurement		Class_B limits dB(μV/m)
	Distance m	Detector type / bandwidth	OATS/SAC
30-230	10	Quasi Peak / 120 kHz	30
230-1000			37
30-230	3		40
230-1000			47

**Radiated emissions at frequencies above 1 GHz for Class_B equipment of the
EN 55032:2015+A11:2020:**

Frequency range MHz	Measurement		Class_B limits dB(μ V/m)
	Distance m	Detector type / bandwidth	FSOATS
1000-3000	3	Average / 1MHz	50
3000-6000			54
1000-3000		Peak / 1MHz	70
3000-6000			74

**Radiated emissions at frequencies above 1 GHz for Class_B equipment of the
EN 55032:2015+A1:2020:**

Frequency range MHz	Measurement		Class_B limits dB(μ V/m)
	Distance m	Detector type / bandwidth	FSOATS
1000-6000	3	Average / 1MHz	54
1000-6000		Peak / 1MHz	74

Note 1: The radiated emissions at frequencies above 1 GHz test limit in this report is based on EN 55032:2015+A11:2020.


Note 2: Test data in this report has been taken against the EN 55032:2015+A11:2020 limit as it is the most stringent limit. By complying with the more restrictive EN 5032:2015+A11:2020 limit compliance with the EN 55032:2015+A1:2020 limit is also demonstrated.

Radiated emissions from FM receivers:

Frequency range MHz	Measurement		Class_B limits dB(μV/m)	
	Distance m	Detector type / bandwidth	Fundamental	Harmonics
			OATS/SAC	OATS/SAC
30-230	10	Quasi Peak / 120 kHz	50	42
230-300				42
300-1000				46
30-230	3		60	52
230-300				52
300-1000				56

4.3 Radiation Test Data: Configuration 1

- Radiated Emissions (Horizontal)

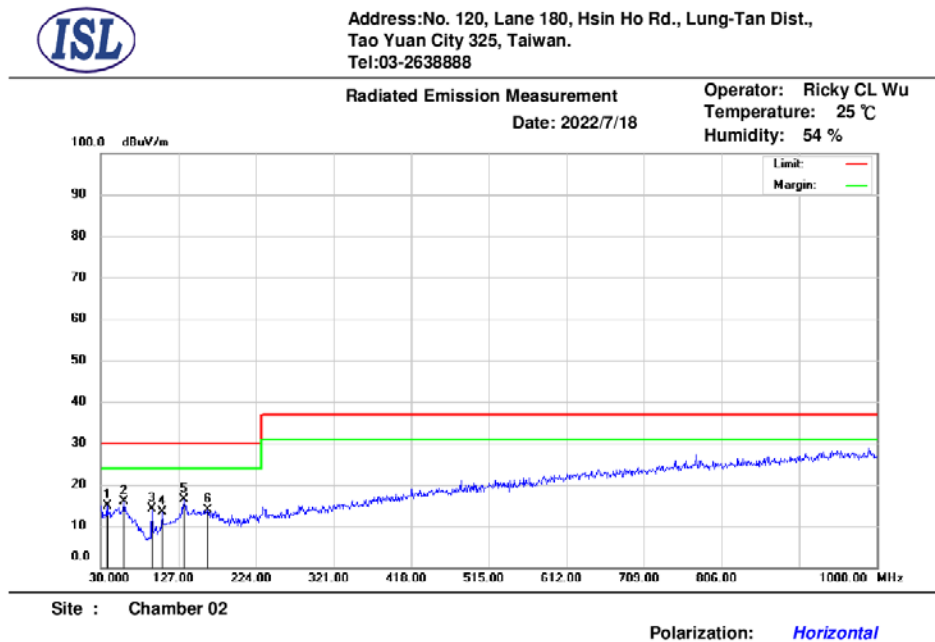

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	37.76	32.65	-17.79	14.86	30.00	-15.14	201	0	QP
2	59.10	32.80	-16.86	15.94	30.00	-14.06	307	360	QP
3	94.02	35.99	-21.79	14.20	30.00	-15.80	297	0	QP
4	106.63	33.01	-19.54	13.47	30.00	-16.53	300	216	QP
5	133.79	33.22	-16.96	16.26	30.00	-13.74	400	163	QP
6	163.86	29.35	-15.50	13.85	30.00	-16.15	400	186	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

If the peak measured value meets the QP limit, The QP value is inherently compliant.




Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement

Date: 2022/7/13

Operator: Zac Lin
Temperature: 24 °C
Humidity: 58 %

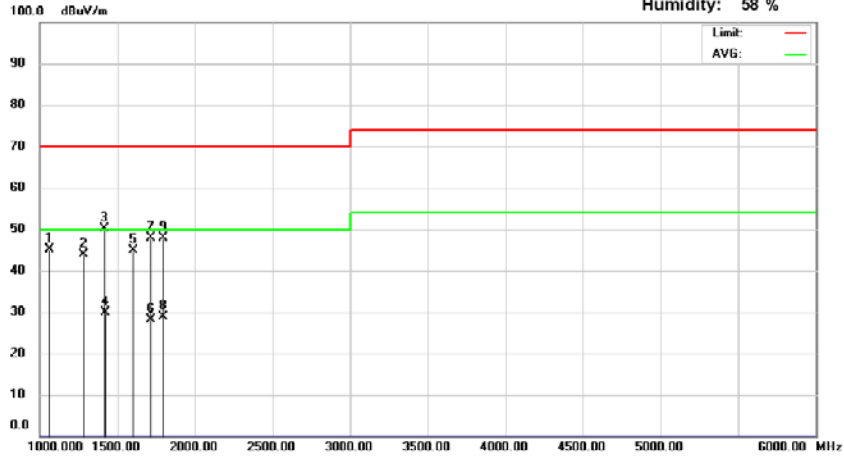

Site : Chamber 14

Polarization: *Horizontal*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1060.00	61.91	-16.77	45.14	70.00	-24.86	100	143	peak
2	1285.00	59.15	-15.30	43.85	70.00	-26.15	100	163	peak
3	1415.00	66.04	-15.93	50.11	70.00	-19.89	150	206	peak
4	1415.10	45.93	-15.93	30.00	50.00	-20.00	150	209	AVG
5	1600.00	60.33	-15.48	44.85	70.00	-25.15	150	137	peak
6	1713.00	42.62	-14.58	28.04	50.00	-21.96	150	312	AVG
7	1715.00	62.39	-14.58	47.81	70.00	-22.19	150	309	peak
8	1791.71	42.74	-13.80	28.94	50.00	-21.06	202	136	AVG
9	1795.00	61.62	-13.75	47.87	70.00	-22.13	200	139	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

If the peak measured value meets the Average limit, The Average value is inherently compliant.


-Radiated Emissions (Vertical)



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement
Date: 2022/7/18

Operator: Ricky CL Wu
Temperature: 25 °C
Humidity: 54 %

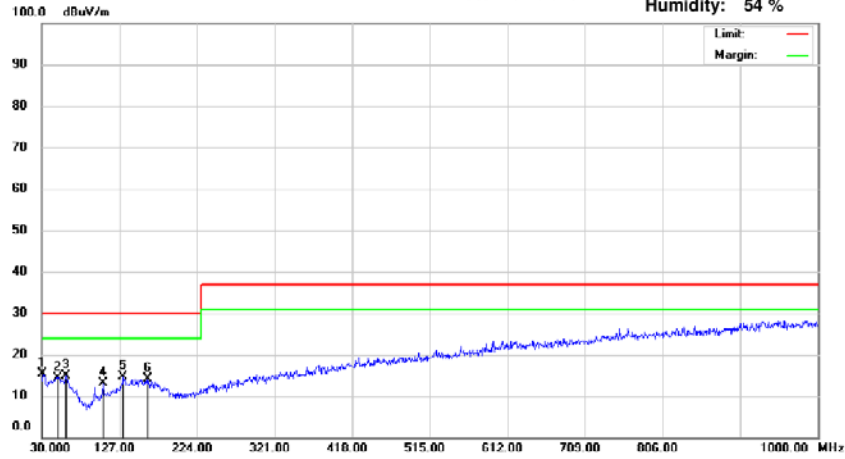

Site : Chamber 02

Polarization: *Vertical*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	30.00	34.47	-19.09	15.38	30.00	-14.62	174	360	QP
2	50.37	31.13	-16.64	14.49	30.00	-15.51	300	211	QP
3	60.07	31.79	-16.79	15.00	30.00	-15.00	100	217	QP
4	106.63	32.75	-19.54	13.21	30.00	-16.79	400	353	QP
5	131.85	31.95	-17.32	14.63	30.00	-15.37	200	167	QP
6	162.89	29.54	-15.44	14.10	30.00	-15.90	300	309	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

If the peak measured value meets the QP limit, The QP value is inherently compliant.




Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement

Date: 2022/7/13

Operator: Zac Lin
Temperature: 24 °C
Humidity: 58 %

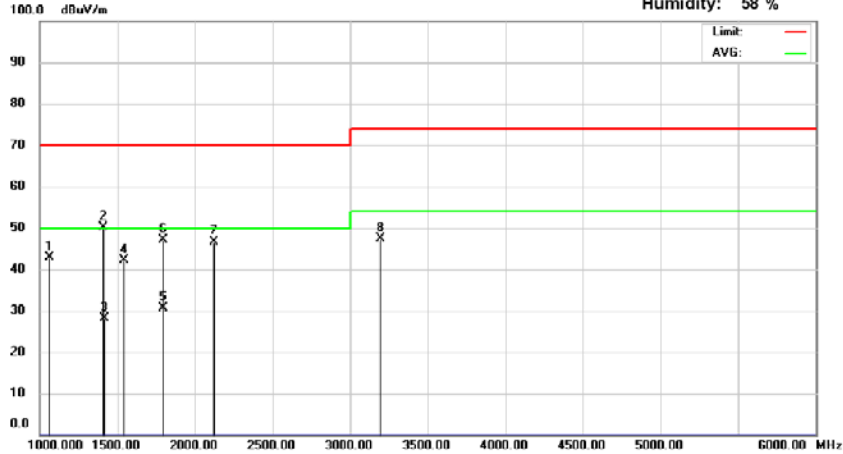

Site : Chamber 14

Polarization: Vertical

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1060.00	59.55	-16.77	42.78	70.00	-27.22	200	173	peak
2	1410.00	66.13	-15.89	50.24	70.00	-19.76	150	179	peak
3	1412.29	44.15	-15.90	28.25	50.00	-21.75	149	183	AVG
4	1545.00	58.18	-16.13	42.05	70.00	-27.95	100	182	peak
5	1791.60	44.55	-13.81	30.74	50.00	-19.26	151	156	AVG
6	1795.00	60.79	-13.75	47.04	70.00	-22.96	150	159	peak
7	2125.00	58.89	-12.15	46.74	70.00	-23.26	100	195	peak
8	3195.00	57.18	-9.87	47.31	74.00	-26.69	200	170	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor


Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

If the peak measured value meets the Average limit, The Average value is inherently compliant.

4.4 Radiation Test Data: Configuration 2 - Radiated Emissions (Horizontal)

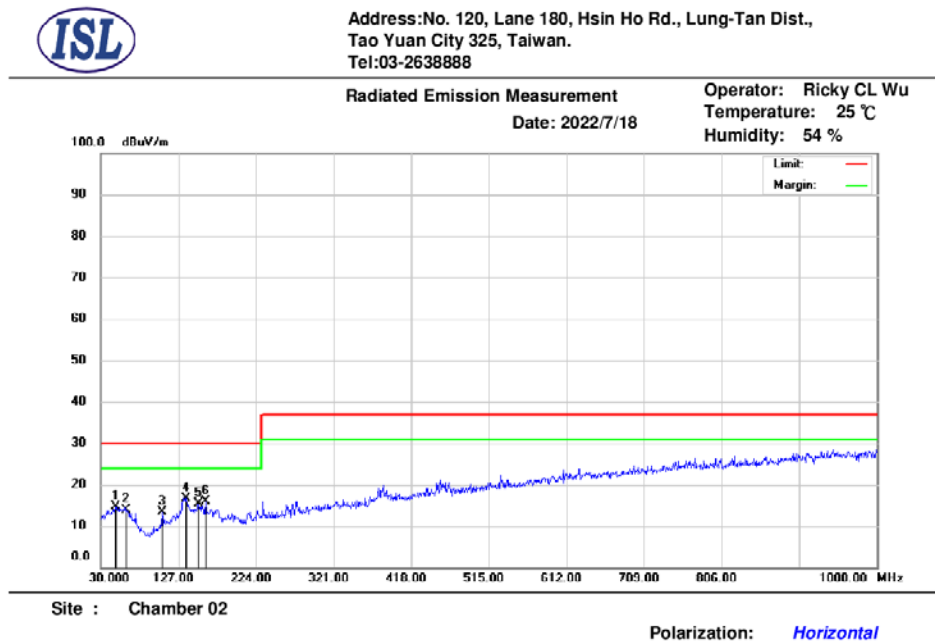

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	48.43	31.12	-16.59	14.53	30.00	-15.47	400	332	QP
2	62.01	31.29	-17.32	13.97	30.00	-16.03	400	144	QP
3	106.63	32.93	-19.54	13.39	30.00	-16.61	300	263	QP
4	136.70	33.39	-16.69	16.70	30.00	-13.30	400	81	QP
5	152.22	30.67	-15.40	15.27	30.00	-14.73	226	267	QP
6	160.95	31.25	-15.45	15.80	30.00	-14.20	375	360	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

If the peak measured value meets the QP limit, The QP value is inherently compliant.




Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement

Date: 2022/7/13

Operator: Zac Lin
Temperature: 24 °C
Humidity: 58 %

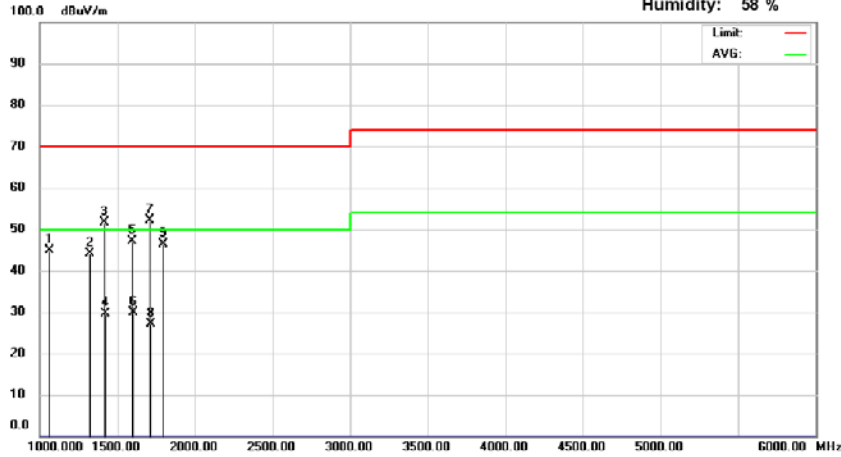

Site : Chamber 14

Polarization: *Horizontal*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1060.00	61.53	-16.77	44.76	70.00	-25.24	100	142	peak
2	1320.00	59.32	-15.20	44.12	70.00	-25.88	150	122	peak
3	1415.00	67.57	-15.93	51.64	70.00	-18.36	150	187	peak
4	1416.06	45.54	-15.94	29.60	50.00	-20.40	151	184	AVG
5	1595.00	62.78	-15.54	47.24	70.00	-22.76	200	222	peak
6	1597.11	45.45	-15.51	29.94	50.00	-20.06	200	225	AVG
7	1710.00	66.61	-14.59	52.02	70.00	-17.98	200	298	peak
8	1710.15	41.83	-14.59	27.24	50.00	-22.76	200	301	AVG
9	1795.00	60.24	-13.75	46.49	70.00	-23.51	150	156	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

If the peak measured value meets the Average limit, The Average value is inherently compliant.


-Radiated Emissions (Vertical)



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement
Date: 2022/7/18

Operator: Ricky CL Wu
Temperature: 25 °C
Humidity: 54 %

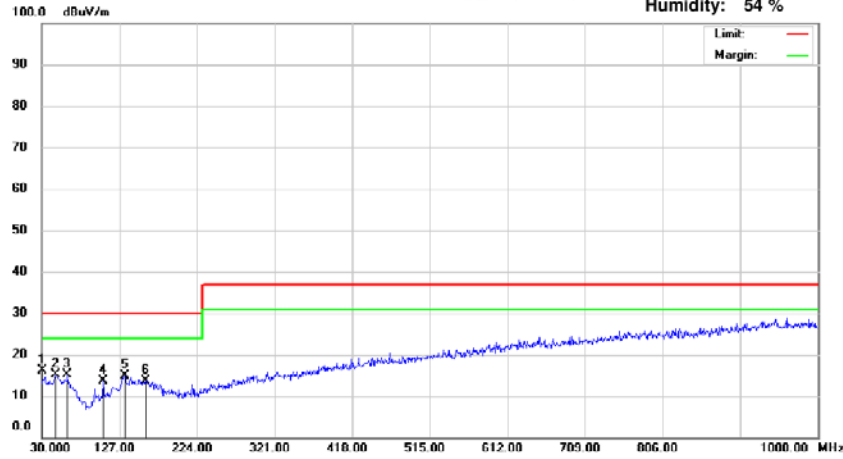

Site : Chamber 02

Polarization: *Vertical*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	30.00	35.26	-19.09	16.17	30.00	-13.83	162	360	QP
2	47.46	31.94	-16.84	15.10	30.00	-14.90	121	360	QP
3	62.01	32.33	-17.32	15.01	30.00	-14.99	200	278	QP
4	106.63	33.23	-19.54	13.69	30.00	-16.31	400	139	QP
5	133.79	31.72	-16.96	14.76	30.00	-15.24	200	167	QP
6	159.98	29.01	-15.46	13.55	30.00	-16.45	400	335	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

If the peak measured value meets the QP limit, The QP value is inherently compliant.




Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement

Date: 2022/7/13

Operator: Zac Lin
Temperature: 24 °C
Humidity: 58 %

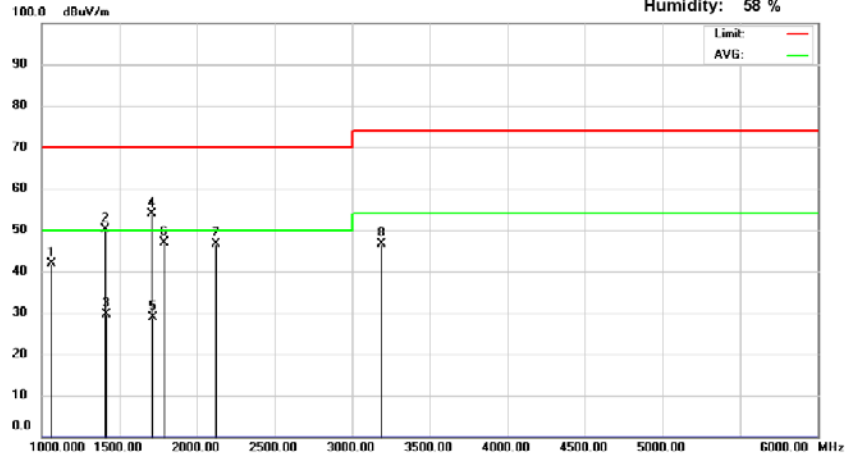

Site : Chamber 14

Polarization: Vertical

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1060.00	58.72	-16.77	41.95	70.00	-28.05	200	166	peak
2	1410.00	65.96	-15.89	50.07	70.00	-19.93	200	195	peak
3	1414.93	45.64	-15.93	29.71	50.00	-20.29	202	198	AVG
4	1710.00	68.54	-14.59	53.95	70.00	-16.05	100	256	peak
5	1712.17	43.54	-14.59	28.95	50.00	-21.05	101	258	AVG
6	1790.00	60.79	-13.84	46.95	70.00	-23.05	100	187	peak
7	2125.00	58.76	-12.15	46.61	70.00	-23.39	100	150	peak
8	3190.00	56.55	-9.86	46.69	74.00	-27.31	200	167	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain


A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

If the peak measured value meets the Average limit, The Average value is inherently compliant.

4.5 Radiation Test Data: Configuration 3

- Radiated Emissions (Horizontal)

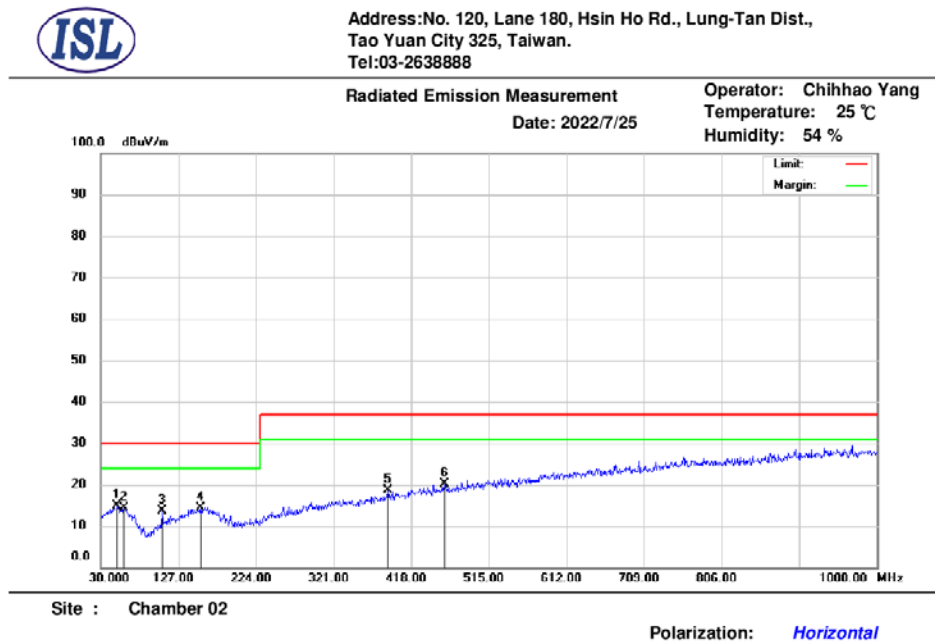

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	50.37	31.41	-16.64	14.77	30.00	-15.23	200	255	QP
2	59.10	31.15	-16.86	14.29	30.00	-15.71	100	316	QP
3	106.63	33.16	-19.54	13.62	30.00	-16.38	299	0	QP
4	154.16	29.72	-15.41	14.31	30.00	-15.69	193	360	QP
5	388.90	29.77	-11.22	18.55	37.00	-18.45	400	33	QP
6	459.71	29.69	-9.49	20.20	37.00	-16.80	100	282	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

If the peak measured value meets the QP limit, The QP value is inherently compliant.



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888


Radiated Emission Measurement

Date: 2022/7/18

Operator: Jeff Chou

Temperature: 25 °C

Humidity: 58 %

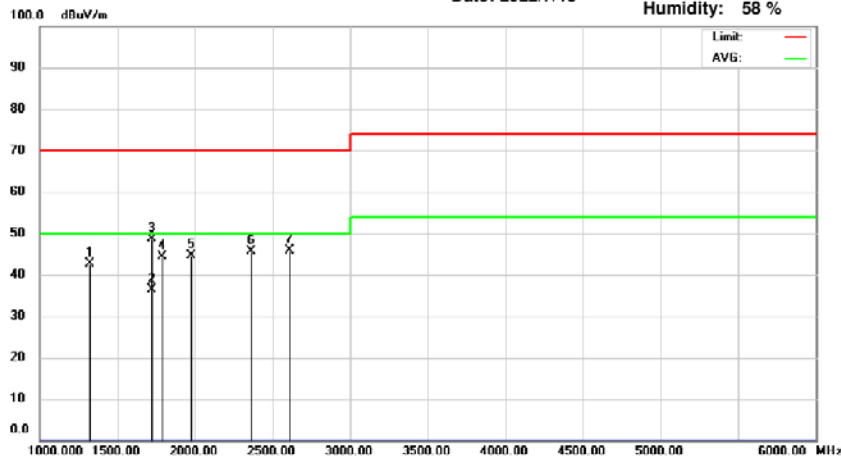

Site : Chamber 14

Polarization: *Horizontal*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1320.00	57.81	-15.20	42.61	70.00	-27.39	250	98	peak
2	1716.30	50.95	-14.58	36.37	50.00	-13.63	100	297	AVG
3	1720.00	63.19	-14.57	48.62	70.00	-21.38	100	304	peak
4	1790.00	58.21	-13.84	44.37	70.00	-25.63	400	230	peak
5	1975.00	56.86	-12.28	44.58	70.00	-25.42	229	0	peak
6	2365.00	57.22	-11.56	45.66	70.00	-24.34	250	233	peak
7	2610.00	57.05	-11.08	45.97	70.00	-24.03	149	233	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

If the peak measured value meets the Average limit, The Average value is inherently compliant.


-Radiated Emissions (Vertical)



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement
Date: 2022/7/25

Operator: Chihhao Yang
Temperature: 25 °C
Humidity: 54 %

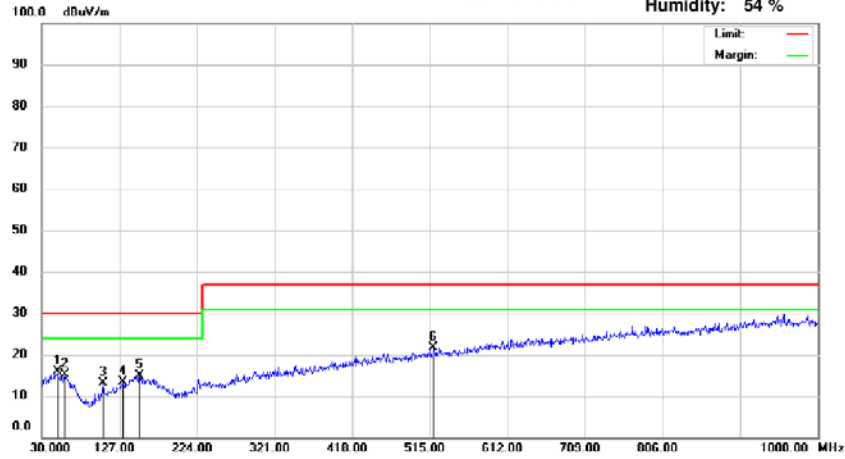

Site : Chamber 02

Polarization: *Vertical*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	49.40	32.45	-16.65	15.80	30.00	-14.20	200	83	QP
2	59.10	31.94	-16.86	15.08	30.00	-14.92	400	341	QP
3	106.63	32.56	-19.54	13.02	30.00	-16.98	400	96	QP
4	130.88	30.65	-17.20	13.45	30.00	-16.55	300	197	QP
5	152.22	30.17	-15.40	14.77	30.00	-15.23	200	344	QP
6	519.85	29.88	-8.27	21.61	37.00	-15.39	400	7	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

If the peak measured value meets the QP limit, The QP value is inherently compliant.



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888


Radiated Emission Measurement

Date: 2022/7/18

Operator: Jeff Chou

Temperature: 25 °C

Humidity: 58 %

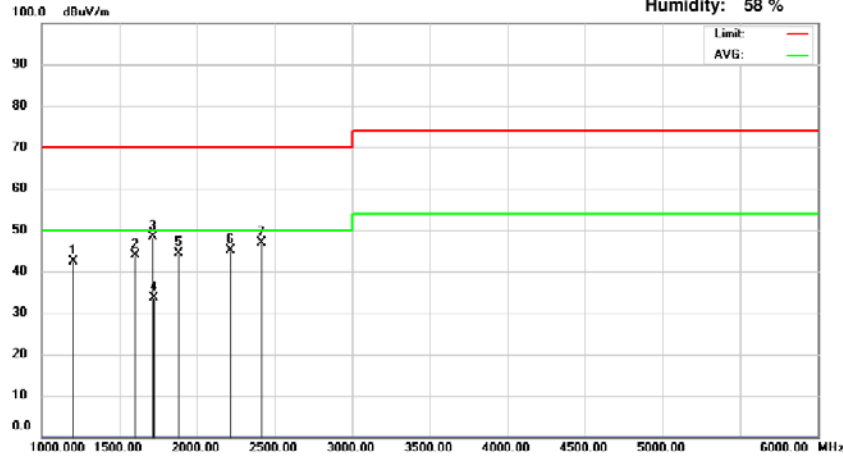

Site : Chamber 14

Polarization: Vertical

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1205.00	57.57	-15.24	42.33	70.00	-27.67	250	314	peak
2	1605.00	59.25	-15.41	43.84	70.00	-26.16	100	149	peak
3	1715.00	63.06	-14.58	48.48	70.00	-21.52	156	140	peak
4	1718.50	48.23	-14.57	33.66	50.00	-16.34	149	135	AVG
5	1885.00	57.06	-12.61	44.45	70.00	-25.55	201	347	peak
6	2215.00	57.42	-12.21	45.21	70.00	-24.79	300	203	peak
7	2415.00	58.16	-11.39	46.77	70.00	-23.23	189	360	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain


A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

If the peak measured value meets the Average limit, The Average value is inherently compliant.

4.6 Radiation Test Data: Configuration 4

- Radiated Emissions (Horizontal)

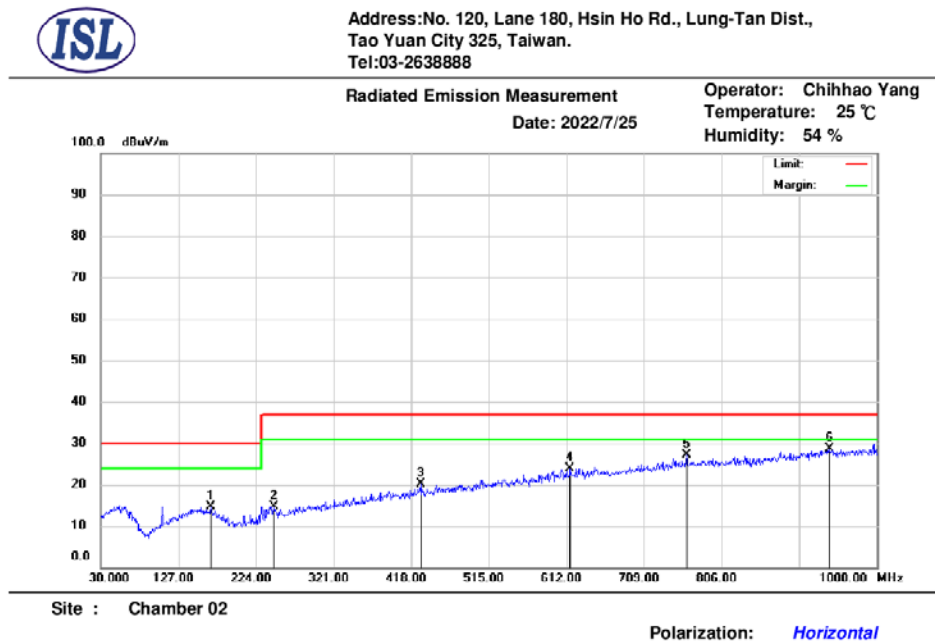

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	167.74	30.31	-15.66	14.65	30.00	-15.35	100	285	QP
2	246.31	30.83	-16.09	14.74	37.00	-22.26	400	181	QP
3	429.64	30.30	-10.18	20.12	37.00	-16.88	300	89	QP
4	616.85	29.89	-5.96	23.93	37.00	-13.07	200	356	QP
5	762.35	30.42	-3.36	27.06	37.00	-9.94	300	86	QP
6	940.83	29.65	-0.92	28.73	37.00	-8.27	300	71	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

If the peak measured value meets the QP limit, The QP value is inherently compliant.



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888


Radiated Emission Measurement

Date: 2022/7/18

Operator: Jeff Chou

Temperature: 25 °C

Humidity: 58 %

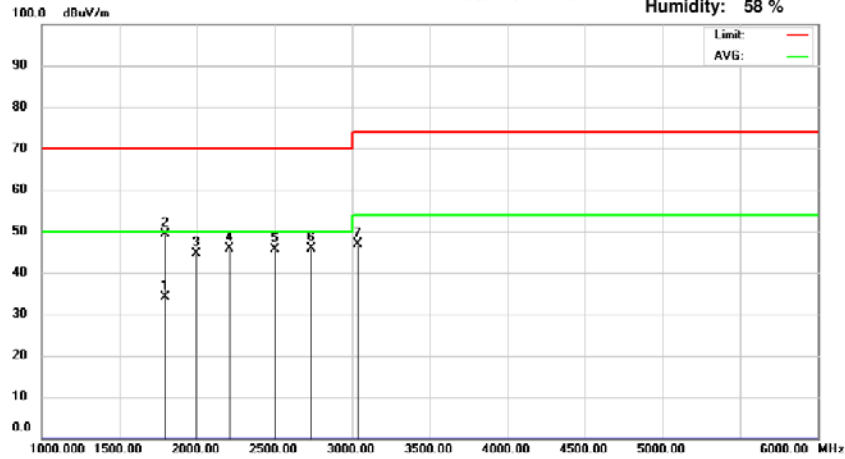

Site : Chamber 14

Polarization: *Horizontal*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1791.50	47.95	-13.82	34.13	50.00	-15.87	349	288	AVG
2	1795.00	63.01	-13.75	49.26	70.00	-20.74	342	281	peak
3	1995.00	56.93	-12.26	44.67	70.00	-25.33	200	155	peak
4	2210.00	58.07	-12.23	45.84	70.00	-24.16	150	114	peak
5	2505.00	57.10	-11.45	45.65	70.00	-24.35	100	317	peak
6	2735.00	56.89	-10.98	45.91	70.00	-24.09	100	304	peak
7	3035.00	57.04	-10.20	46.84	74.00	-27.16	350	306	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters

If the peak measured value meets the Average limit, The Average value is inherently compliant.


-Radiated Emissions (Vertical)



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement
Date: 2022/7/25

Operator: Chihhao Yang
Temperature: 25 °C
Humidity: 54 %

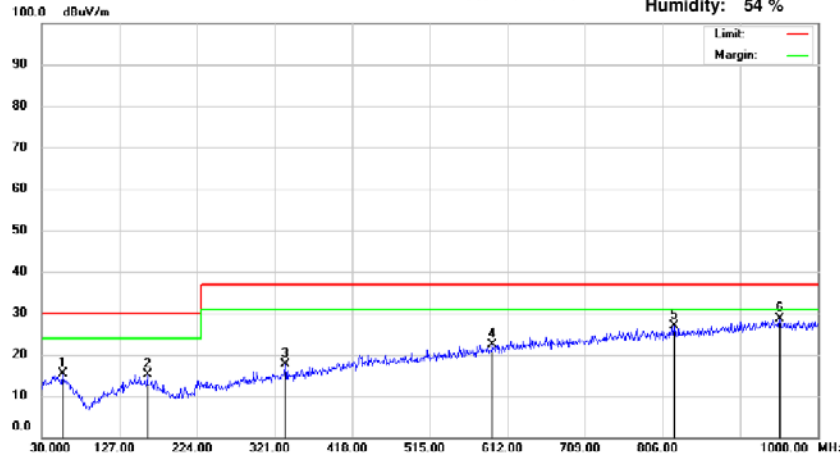

Site : Chamber 02

Polarization: Vertical

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	56.19	31.92	-16.61	15.31	30.00	-14.69	100	174	QP
2	161.92	30.76	-15.52	15.24	30.00	-14.76	100	348	QP
3	334.58	30.48	-12.79	17.69	37.00	-19.31	100	75	QP
4	593.57	28.90	-6.57	22.33	37.00	-14.67	100	25	QP
5	820.55	29.81	-2.81	27.00	37.00	-10.00	100	152	QP
6	952.47	29.61	-0.90	28.71	37.00	-8.29	100	350	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

If the peak measured value meets the QP limit, The QP value is inherently compliant.



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888


Radiated Emission Measurement

Date: 2022/7/18

Operator: Jeff Chou

Temperature: 25 °C

Humidity: 58 %

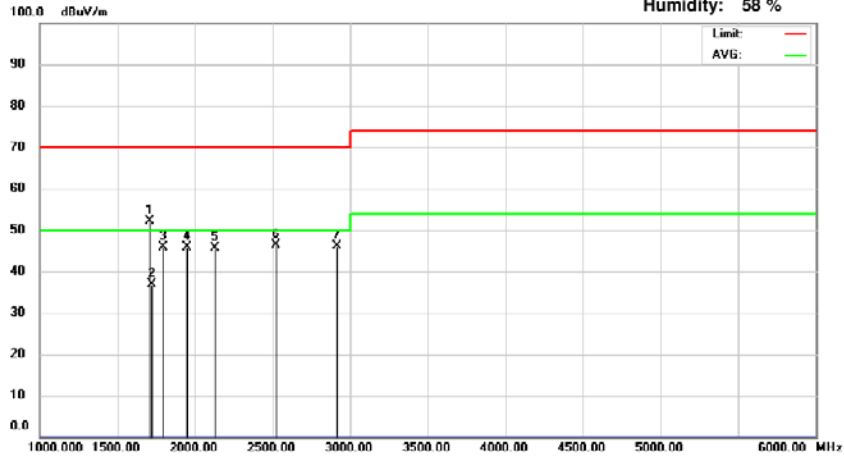

Site : Chamber 14

Polarization: *Vertical*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1710.00	66.61	-14.59	52.02	70.00	-17.98	157	230	peak
2	1715.10	51.35	-14.58	36.77	50.00	-13.23	151	236	AVG
3	1795.00	59.65	-13.75	45.90	70.00	-24.10	250	191	peak
4	1950.00	58.27	-12.29	45.98	70.00	-24.02	150	314	peak
5	2130.00	57.90	-12.16	45.74	70.00	-24.26	100	171	peak
6	2520.00	57.71	-11.40	46.31	70.00	-23.69	100	181	peak
7	2915.00	56.91	-10.68	46.23	70.00	-23.77	400	89	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain


A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters


If the peak measured value meets the Average limit, The Average value is inherently compliant.

4.7 Test Setup Photo


Configuration 1
Front View (30MHz~1GHz)

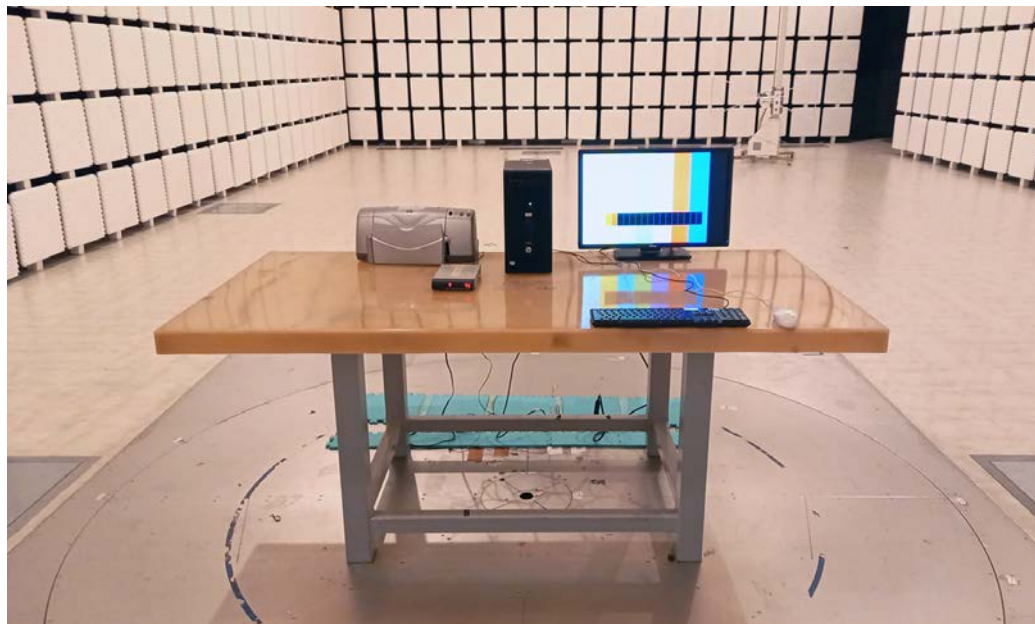


Back View (30MHz~1GHz)

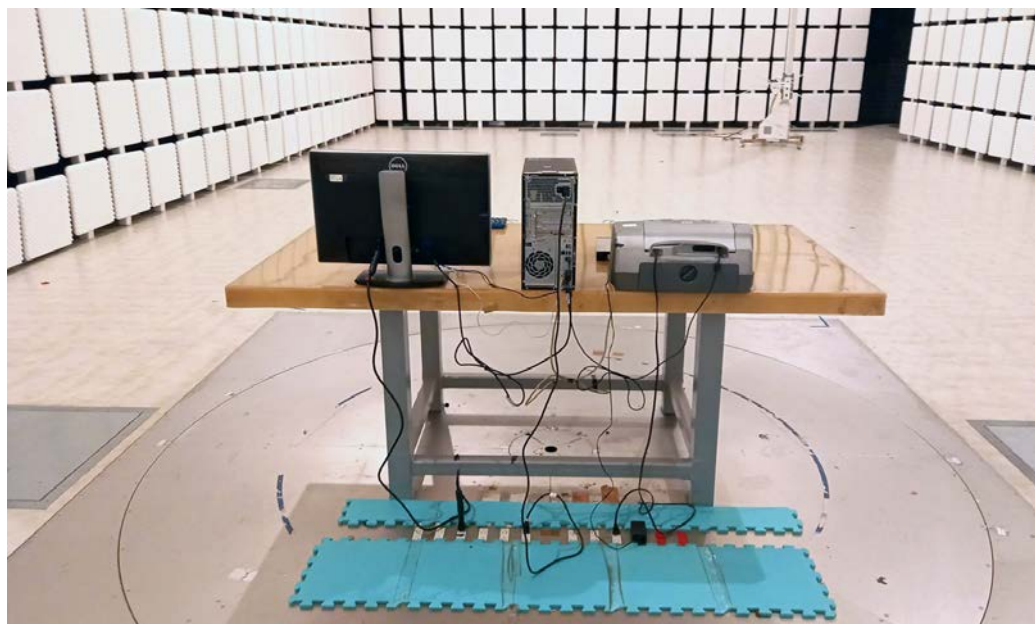

Front View (above 1GHz)

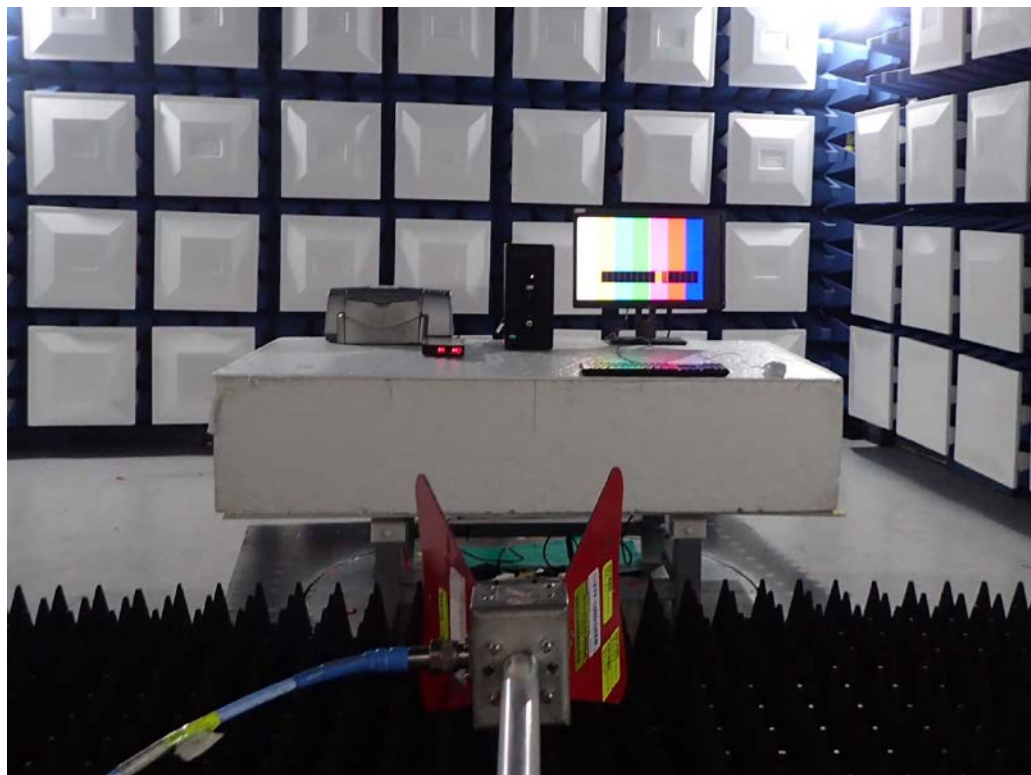


Back View (above 1GHz)

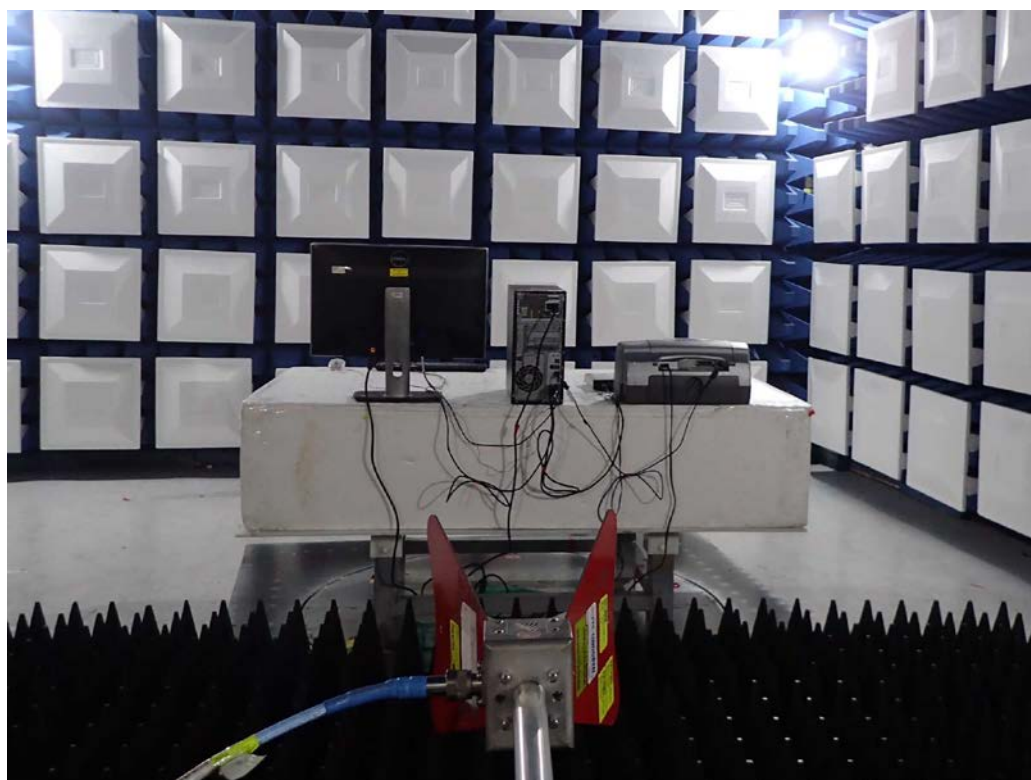


Configuration 2
Front View (30MHz~1GHz)




Back View (30MHz~1GHz)

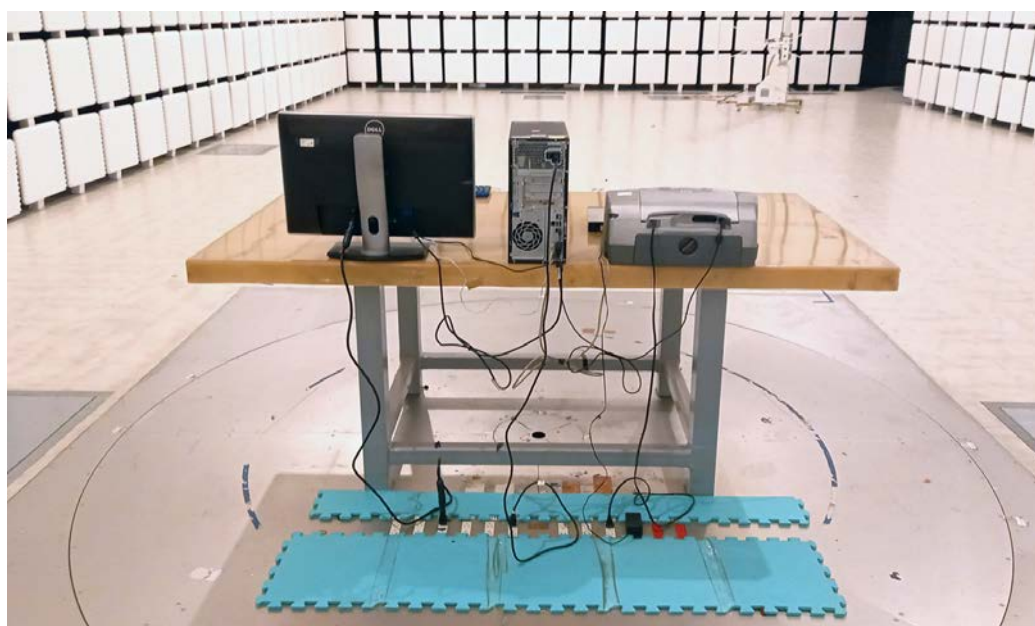

Front View (above 1GHz)

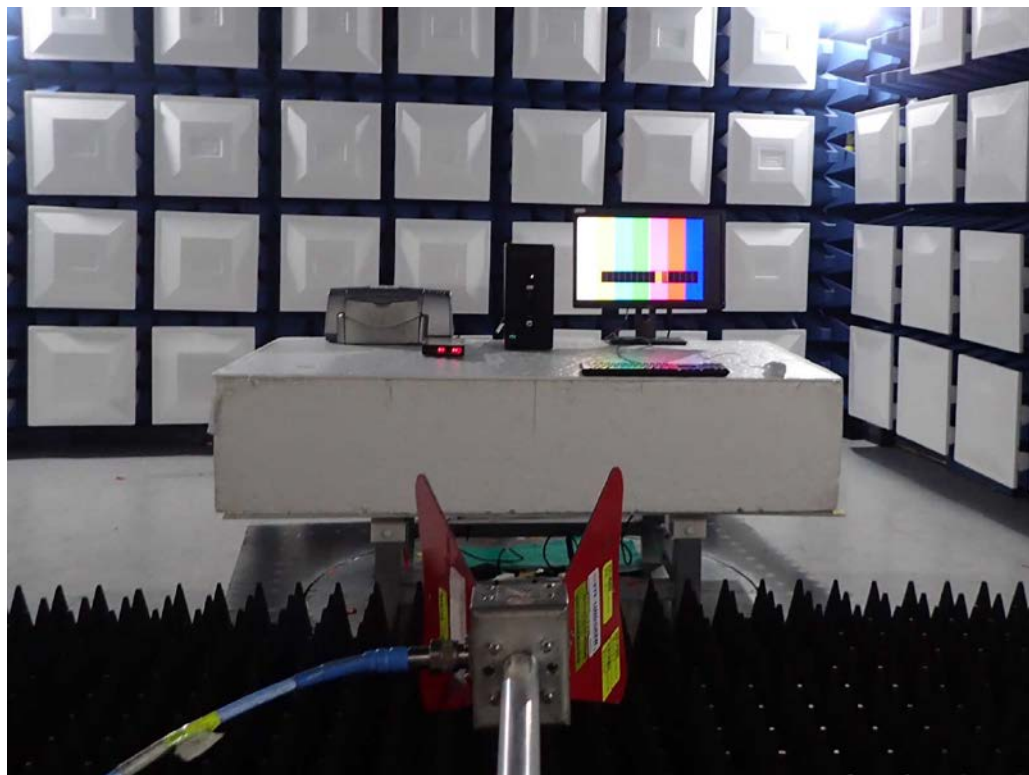

Back View (above 1GHz)

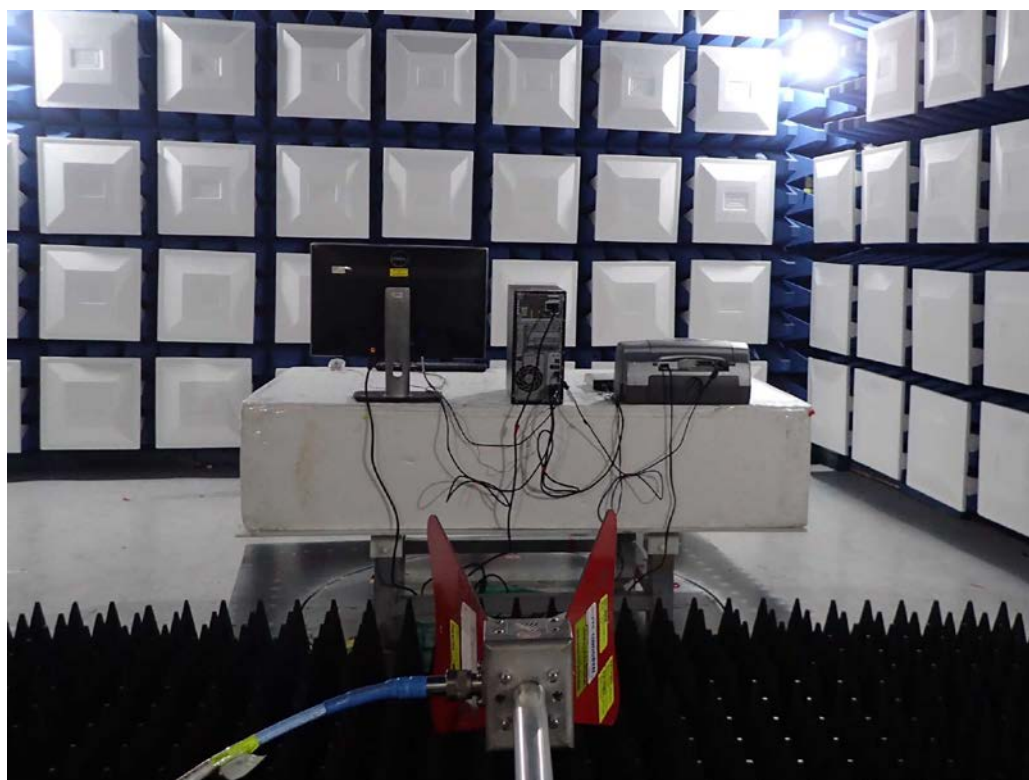


Configuration 3
Front View (30MHz~1GHz)




Back View (30MHz~1GHz)




Front View (above 1GHz)

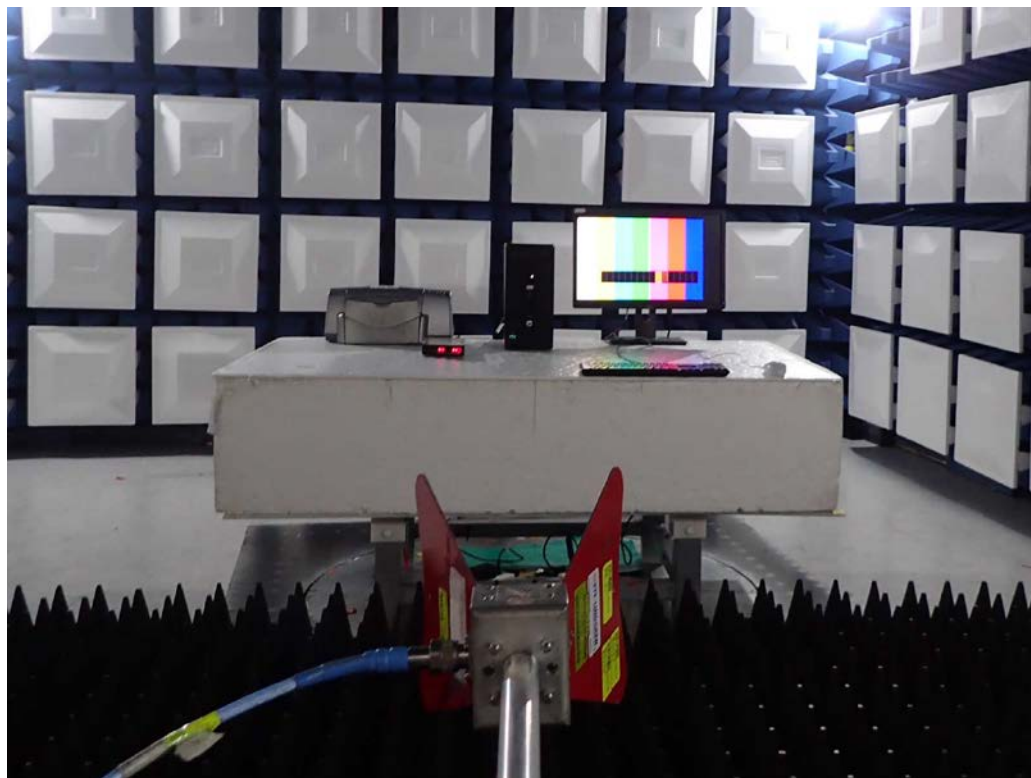


Back View (above 1GHz)

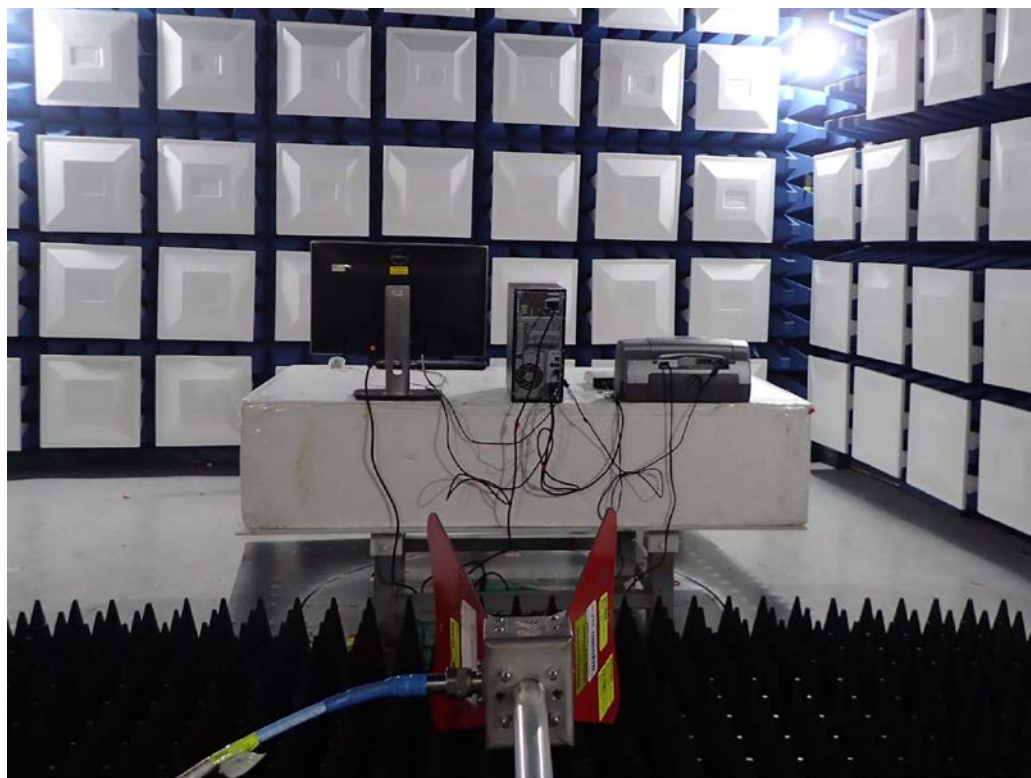


Configuration 4
Front View (30MHz~1GHz)

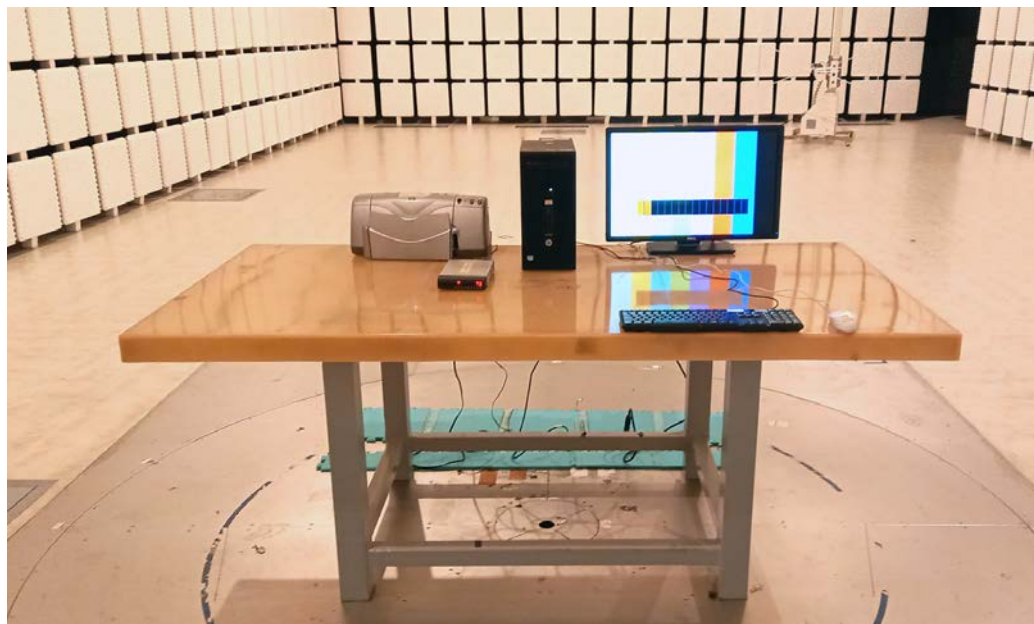


Back View (30MHz~1GHz)

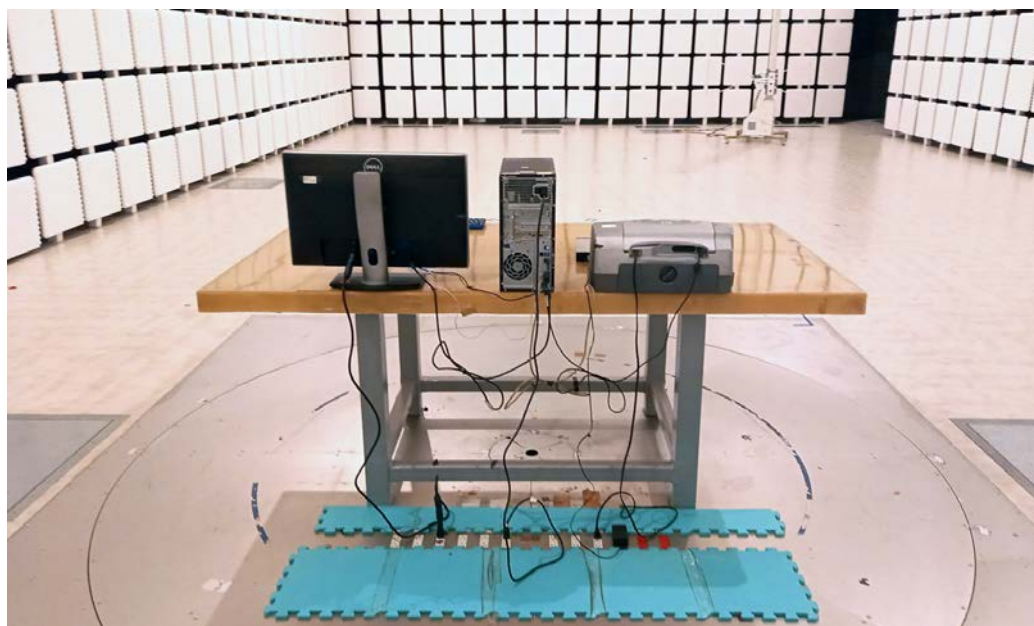

Front View (above 1GHz)

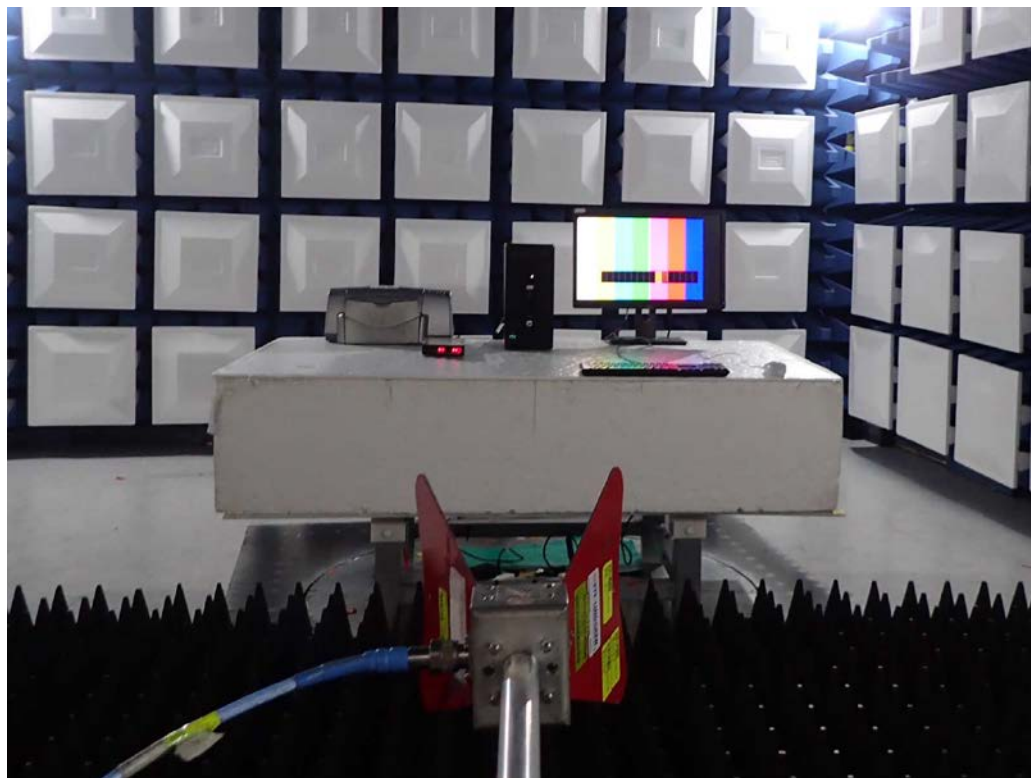


Back View (above 1GHz)

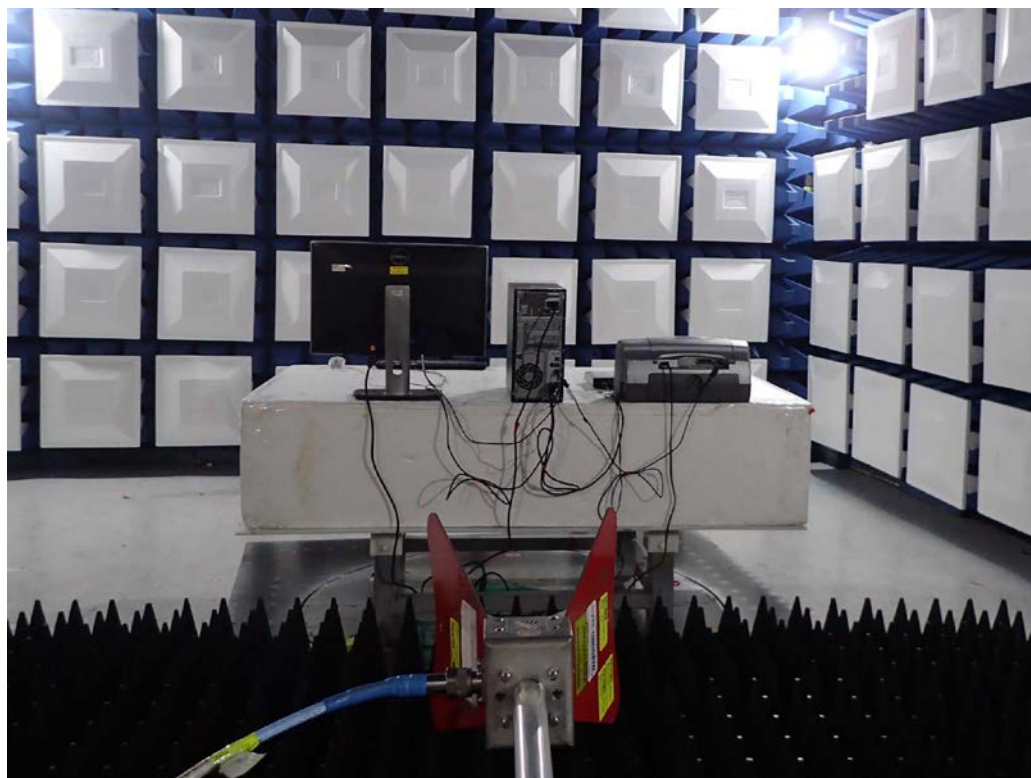

5. Voltage Disturbance Emissions at Antenna Terminals

5.1 Test Setup and Procedure

5.1.1 Test Setup

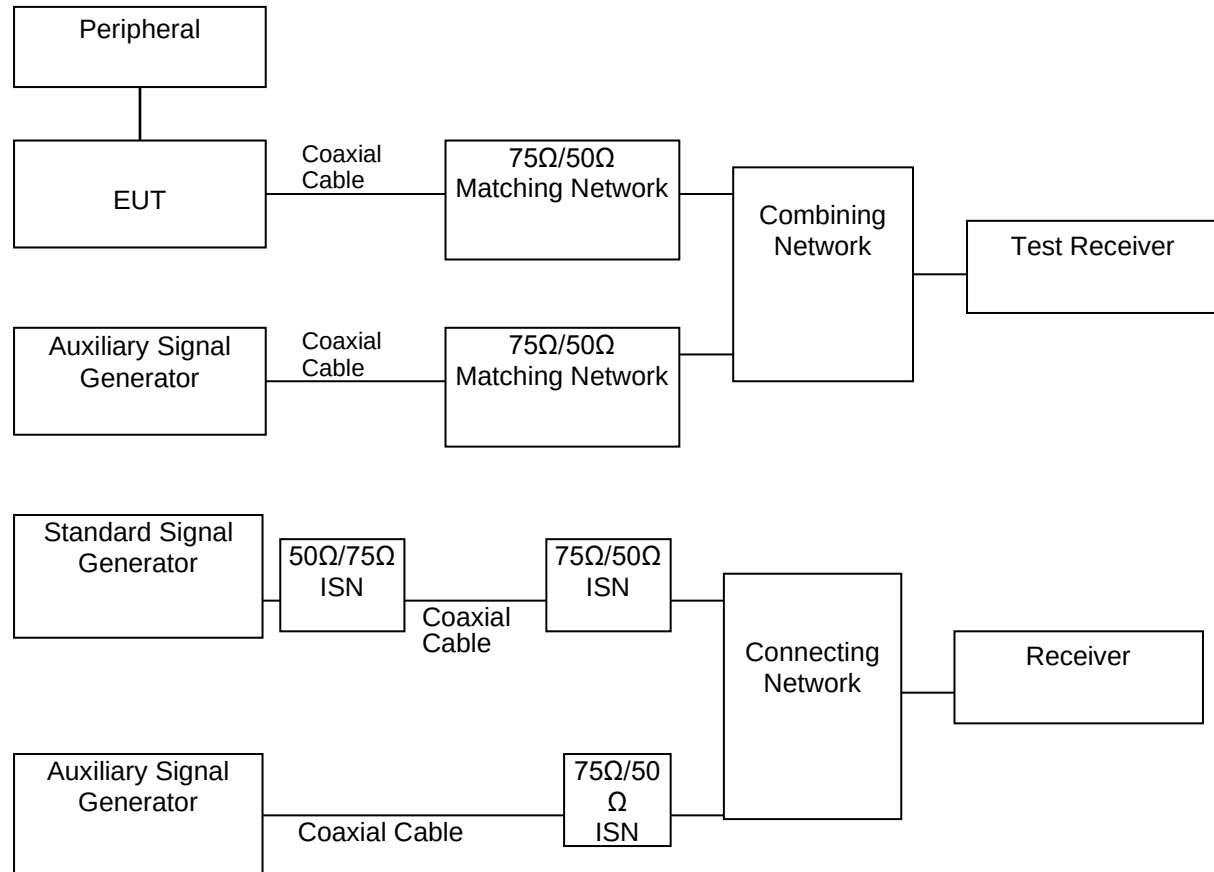

5.1.2 Test Procedure

The output level of the auxiliary signal generator was set to 70dB μ V at the EUT antenna terminal with 75 ohms impedance with an un-modulated carrier.

The highest emissions were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The power of EUT was switched off to make sure the emission was not contributed by the auxiliary signal generator. While doing so, the interconnecting cables and major parts of the system were moved around to maximize the emission.

5.1.3 EMI Receiver Configuration (for the frequencies tested)

Frequency Range:	30MHz-2150MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120kHz

5.1.4 Limit

Applicable to:

1. TV broadcast receiver tuner ports with an accessible connector.
2. RF modulator output ports.
3. FM broadcast receiver tuner ports with an accessible connector.

Applicable to

1. TV broadcast receiver tuner ports (3.1.8) with an accessible connector

2. RF modulator output ports (3.1.29)

3. FM broadcast receiver tuner ports (3.1.8) with an accessible connector

Table clause	Frequency range MHz	Detector type/ bandwidth	Class B limits dB(μV) 75 Ω			Applicability
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics	
A13.1	30 to 950	For frequencies ≤1 GHz	46	46	46	See ^a
	950 to 2 150		46	54	54	
A13.2	950 to 2 150	Quasi Peak/ 120 kHz	46	54	54	See ^b
A13.3	30 to 300		46	54	50	See ^c
	300 to 1 000	52				
A13.4	30 to 300	For frequencies ≥1 GHz	46	66	59	See ^d
	300 to 1 000				52	
A13.5	30 to 950	Peak/ 1 MHz	46	76	46	See ^e
	950 to 2 150			n/a	54	

a

Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.

b

Tuner units (not the LNB) for satellite signal reception.

c

Frequency modulation audio receivers and PC tuner cards.

d

Frequency modulation car radios.

e

Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports. Limits specified for the LO are for the RF modulator carrier signal and harmonics.

The term 'other' refers to all emissions other than the fundamental and the harmonics of the LO.

The measurement shall cover the entire frequency range.


The EUT shall be tuned in accordance with Table B.3 and clause C.4.2.1.

****Remarks: It is not necessary to be tested on this item.**

6. Differential Voltage Emissions

6.1 Test Setup and Procedure

6.1.1 Test Setup

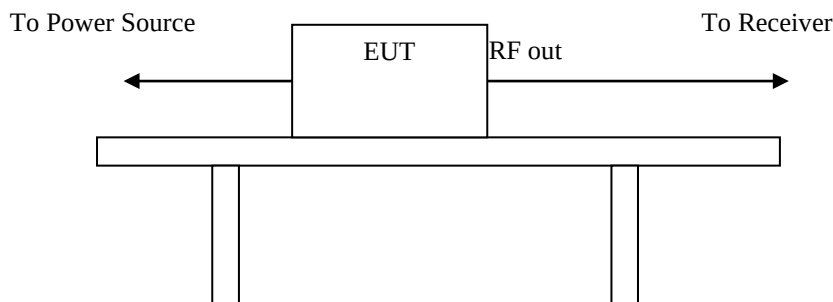

6.1.2 Test Procedure

The output level of the auxiliary signal generator was set to 70dB μ V at the EUT antenna terminal with 75 ohms impedance with an un-modulated carrier.

The highest emissions were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The power of EUT was switched off to make sure the emission was not contributed by the auxiliary signal generator. While doing so, the interconnecting cables and major parts of the system were moved around to maximize the emission.

6.1.3 EMI Receiver Configuration (for the frequencies tested)

Frequency Range:	30MHz-2150MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120kHz

6.1.4 Limit

Applicable to:

1. TV broadcast receiver tuner ports with an accessible connector.
2. RF modulator output ports.
3. FM broadcast receiver tuner ports with an accessible connector.

Applicable to

1. TV broadcast receiver tuner ports (3.1.8) with an accessible connector

2. RF modulator output ports (3.1.29)

3. FM broadcast receiver tuner ports (3.1.8) with an accessible connector

Table clause	Frequency range MHz	Detector type/ bandwidth	Class B limits dB(μV) 75 Ω			Applicability
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics	
A13.1	30 to 950	For frequencies ≤1 GHz	46	46	46	See ^a
	950 to 2 150		46	54	54	
A13.2	950 to 2 150	Quasi Peak/ 120 kHz	46	54	54	See ^b
A13.3	30 to 300		46	54	50	See ^c
	300 to 1 000	52				
A13.4	30 to 300	For frequencies ≥1 GHz	46	66	59	See ^d
	300 to 1 000				52	
A13.5	30 to 950	Peak/ 1 MHz	46	76	46	See ^e
	950 to 2 150			n/a	54	

a

Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.

b

Tuner units (not the LNB) for satellite signal reception.

c

Frequency modulation audio receivers and PC tuner cards.

d

Frequency modulation car radios.

e

Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports. Limits specified for the LO are for the RF modulator carrier signal and harmonics.

The term 'other' refers to all emissions other than the fundamental and the harmonics of the LO.

The measurement shall cover the entire frequency range.



The EUT shall be tuned in accordance with Table B.3 and clause C.4.2.1.

****Remarks: It is not necessary to be tested on this item.**

7. Outdoor units of home satellite receiving systems

7.1 Test Setup and Procedure

7.1.1 Test Setup

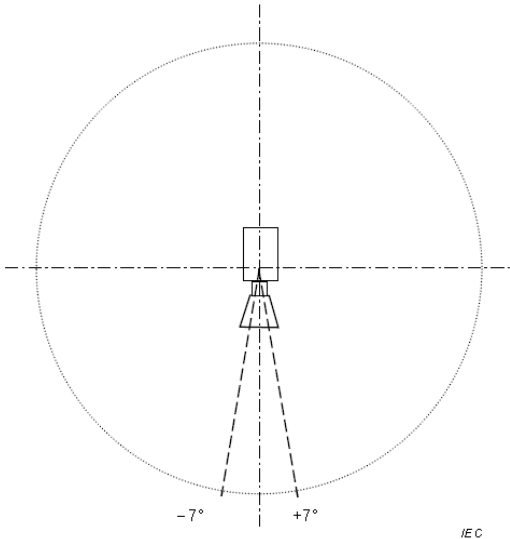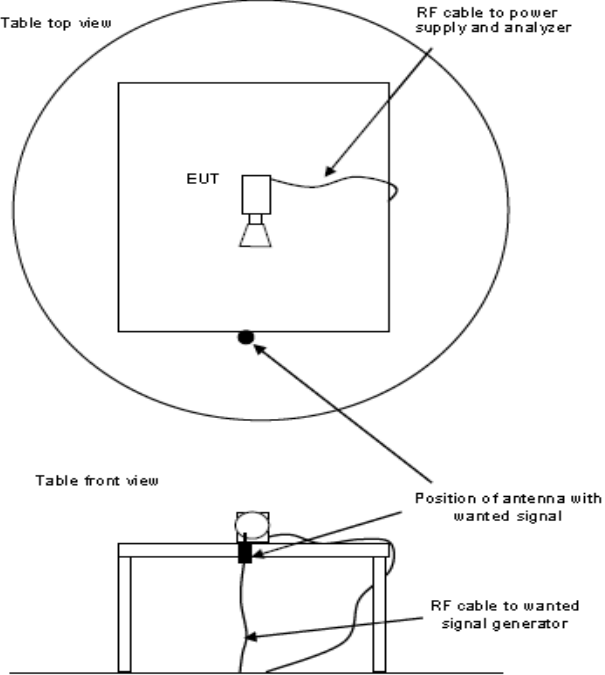	
Description of $\pm 7^\circ$ of the main beam axis of the EUT	Measurement arrangements of transmit antenna for the wanted signal

7.1.2 Test Procedure

The input signal shall be adjusted to get the maximum rated output level from the EUT. For the measurement in the frequency range from 30 MHz to 18 GHz the input signal shall be adjusted so that the output frequency is within this frequency range. For the measurement in the frequency range above 1 GHz, the frequency of the input signal shall be adjusted in such a way that the EUT is measured, as a minimum, at the lowest, middle and highest rated output frequency within the measured frequency range.

7.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 30MHz--1000MHz
 Detector Function: Quasi-Peak Mode
 Resolution Bandwidth: 120kHz

Frequency Range: Above 1000MHz
 Detector Function: Peak/Average Mode
 Resolution Bandwidth: 1MHz

7.1.4 Limit

EN 55032:2015+A11:2020

Table Clause	Frequency Range MHz	Measurement			Class B Limits	Applicable to
		Facility (see Table A.1)	Distance m	Detector type / Bandwidth		
A7.1	30 to 1 000	SAC / OATS / FAR	See Table A.4	Quasi Peak / 120 kHz	See Table A.4	
A7.2	1 000 to 2 500	FSOATS	3	Average / 1 MHz	50 dB(μV/m)	LO leakage and spurious radiated emissions from the EUT, in the region outside ±7° of the main beam axis. See Figure H.1
	2 500 to 18 000				64 dB(μV/m)	
A7.3	1 000 to 18 000	FSOATS	3	Average / 1 MHz	37 dB(μV/m)	LO leakage from the EUT, in the region within ±7° of the main beam axis. See Figure H.1
A7.4	1 000 to 18 000	Conducted (Clause H.4)	n/a	Average / 1 MHz	30 dBpW	

For details of the EUT configuration, see Annex H.

For radiated emissions measurements at frequencies up to 1 GHz, the requirements defined in Table A.4 shall be satisfied.

Apply the appropriate limits across the entire frequency range.

Apply the limits defined in table Clause A7.1 and A7.2. Also apply the limits defined in either table Clause A7.3 or A7.4.

EN 55032:2015+A1:2020

Table Clause	Frequency Range MHz	Measurement			Class B Limits	Notes
		Facility (see Table A.1)	Distance m	Detector type / Bandwidth		
A7.1	30 to 1 000	SAC / OATS / FAR	See Table A.4	Quasi Peak / 120 kHz	See Table A.4	See Annex H
A7.2	1 000 to 2 500	FSOATS	3	Average / 1 MHz	50 dB(μV/m)	LO leakage and spurious radiated emissions from the EUT, in the region outside ±7° azimuth of the main beam axis. See Annex H
	2 500 to 18 000				64 dB(μV/m)	
A7.3	1 000 to 18 000	FSOATS	3	Average / 1 MHz	70 dB(μV/m)	LO leakage from the EUT, in the region within ±7° azimuth of the main beam axis. See Annex H
A7.4	1 000 to 18 000	Conducted (Clause H.4)	n/a	Average / 1 MHz	63 dBpW	

Apply the limits defined in table Clause A7.1 and A7.2. Also apply the limits defined in either table Clause A7.3 or A7.4.

For details of the EUT configuration, see Annex H.

For radiated emissions measurements at frequencies up to 1 GHz, the requirements defined in Table A.4 shall be satisfied.

Apply the appropriate limits across the entire frequency range.

Note 1: The test limit in this report is based on EN 55032:2015+A11:2020.

Note 2: Test data in this report has been taken against the EN 55032:2015+A11:2020 limit as it is the most stringent limit. By complying with the more restrictive EN 5032:2015+A11:2020 limit compliance with the EN 55032:2015+A1:2020 limit is also demonstrated.

****Remarks: It is not necessary to be tested on this item.**

8. Electrostatic discharge (ESD) immunity

8.1 Test Specification and Setup

8.1.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-2 / IEC 61000-4-2 / BS EN 61000-4-2 (details referred to Sec 1.2)
Test Level:	Air +/- 2 kV, +/- 4 kV, +/- 8 kV Contact +/- 4 kV
Criteria:	B
Test Procedure:	refer to ISL QA -T4-E-S7
Temperature:	22°C
Humidity:	40%

Selected Test Point


Air: discharges were applied to slots, aperture or insulating surfaces. 10 single air discharges were applied to each selected points.

Contact: 10 discharges minimum were to the selected contact points.

Indirect Contact Points: 10 discharges were applied to center of one edge of VCP and each EUT side of HCP with 10 cm away from EUT.

8.1.2 Test Setup

EUT is 1m from the wall and other metallic structure. When Battery test mode is needed, a cable with one 470kΩ resistor at two rare ends is connected from metallic part of EUT and screwed to HCP.

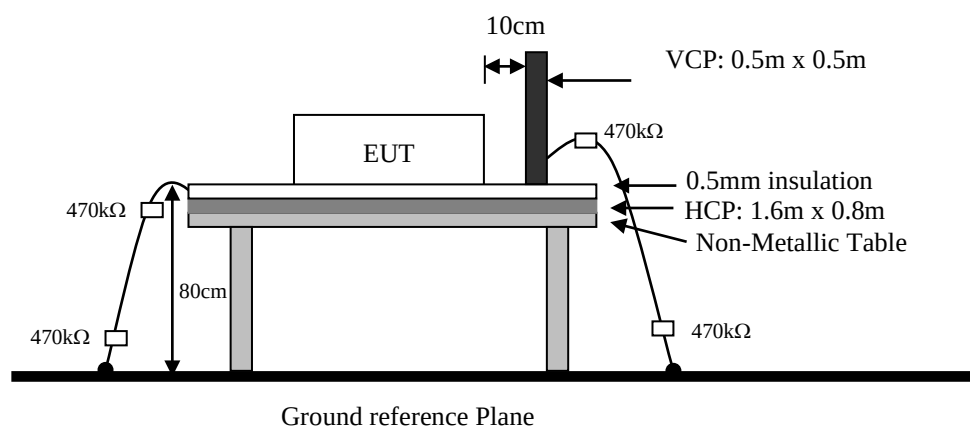

8.1.3 Test Result

Performance of EUT complies with the given specification.

8.2 Test Point: Configuration 1

Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.

Figure 1: Test Point Assignments Discharge:


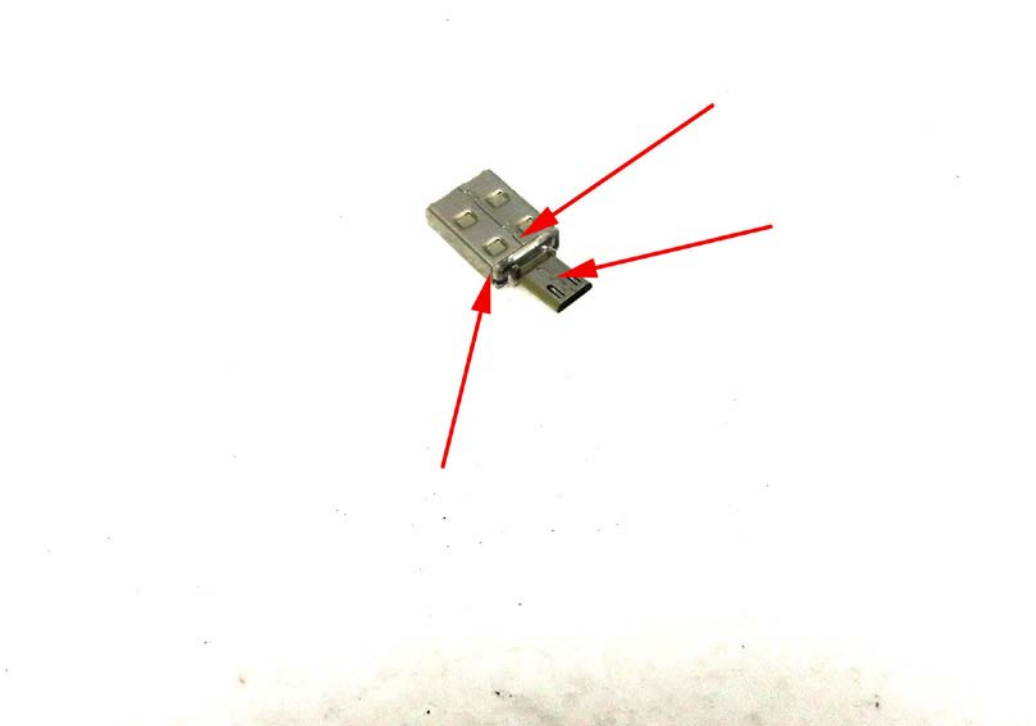


Figure 2: Test Point Assignments Discharge:

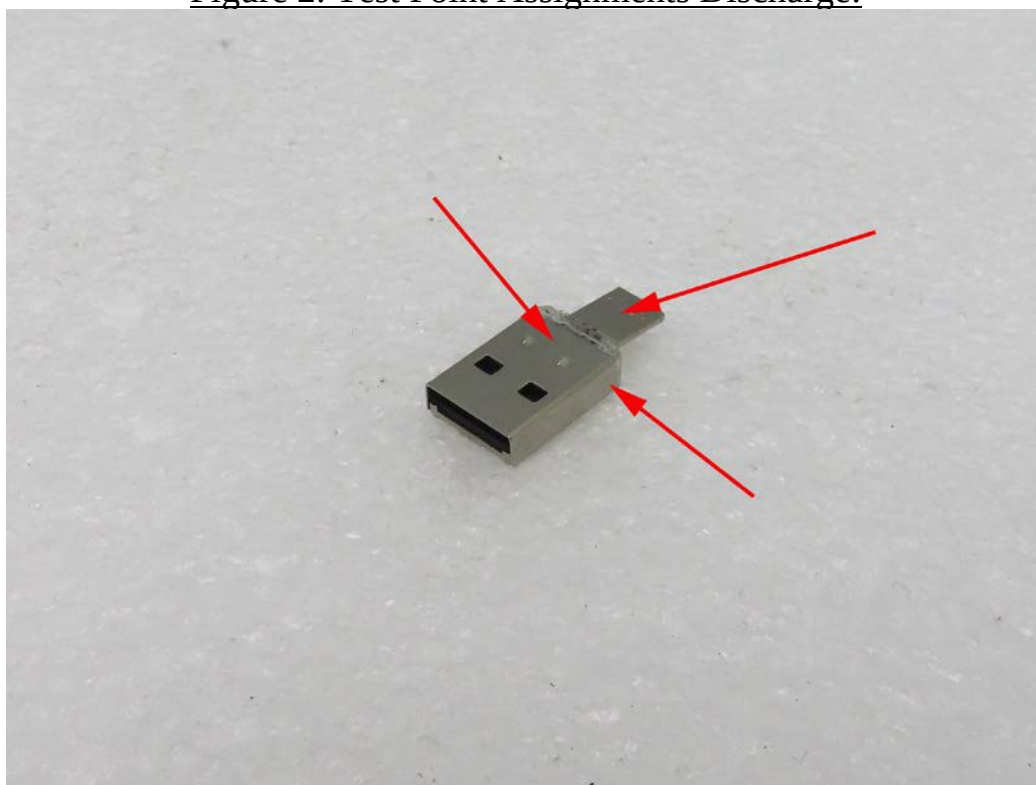

8.3 Test Point: Configuration 2

Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.

Figure 1: Test Point Assignments Discharge:


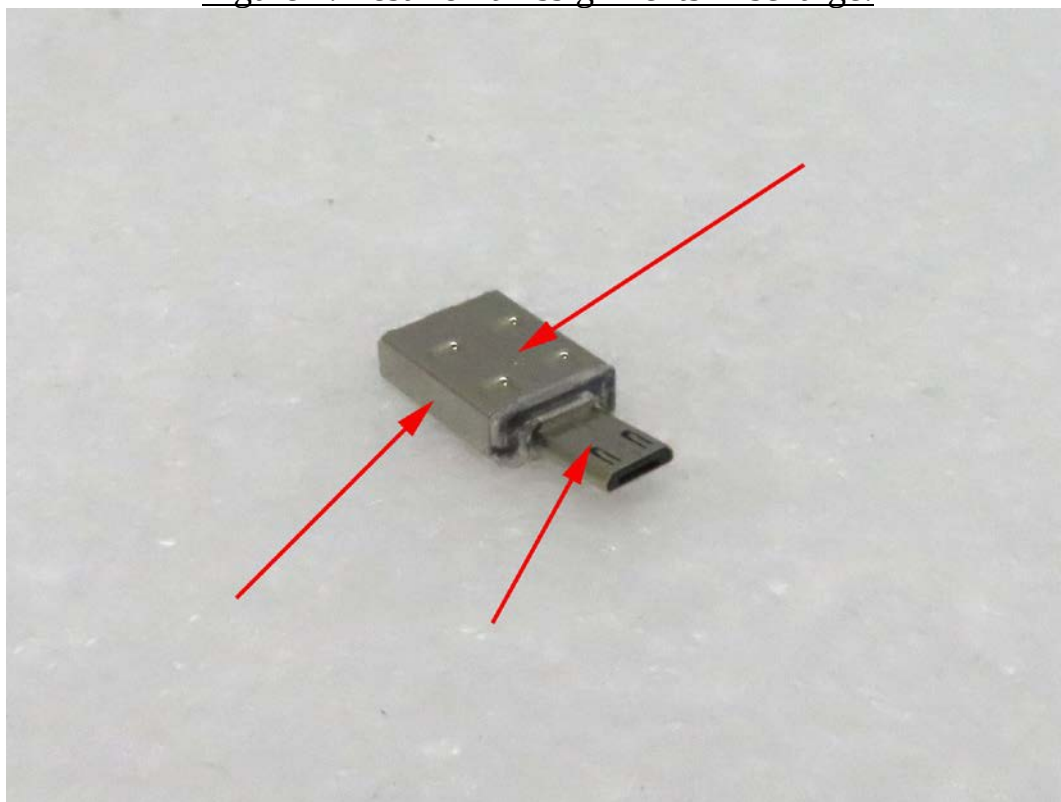


Figure 2: Test Point Assignments Discharge:

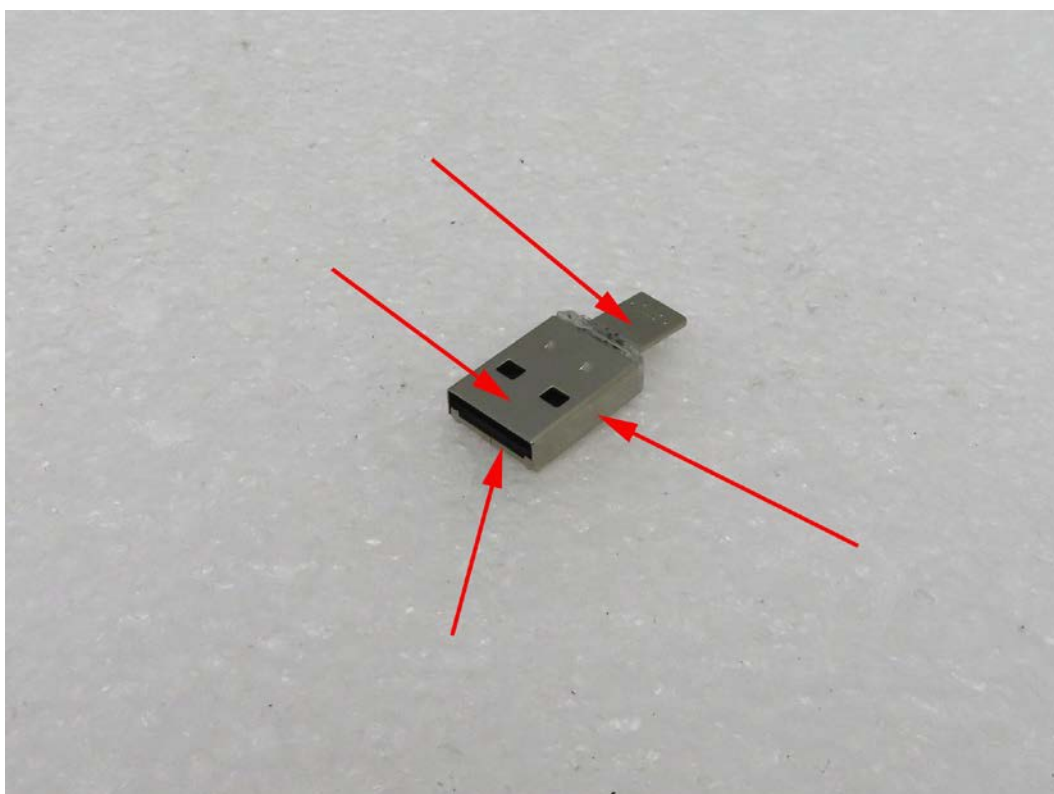

8.4 Test Point: Configuration 3

Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.

Figure 1: Test Point Assignments Discharge:


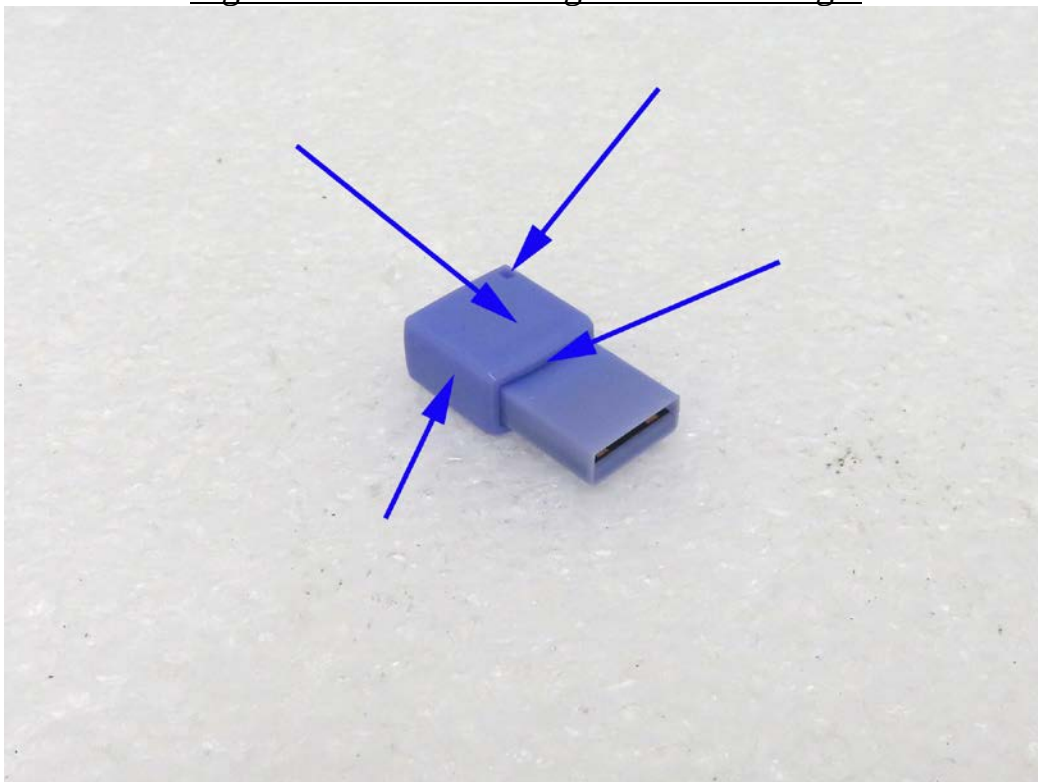


Figure 2: Test Point Assignments Discharge:

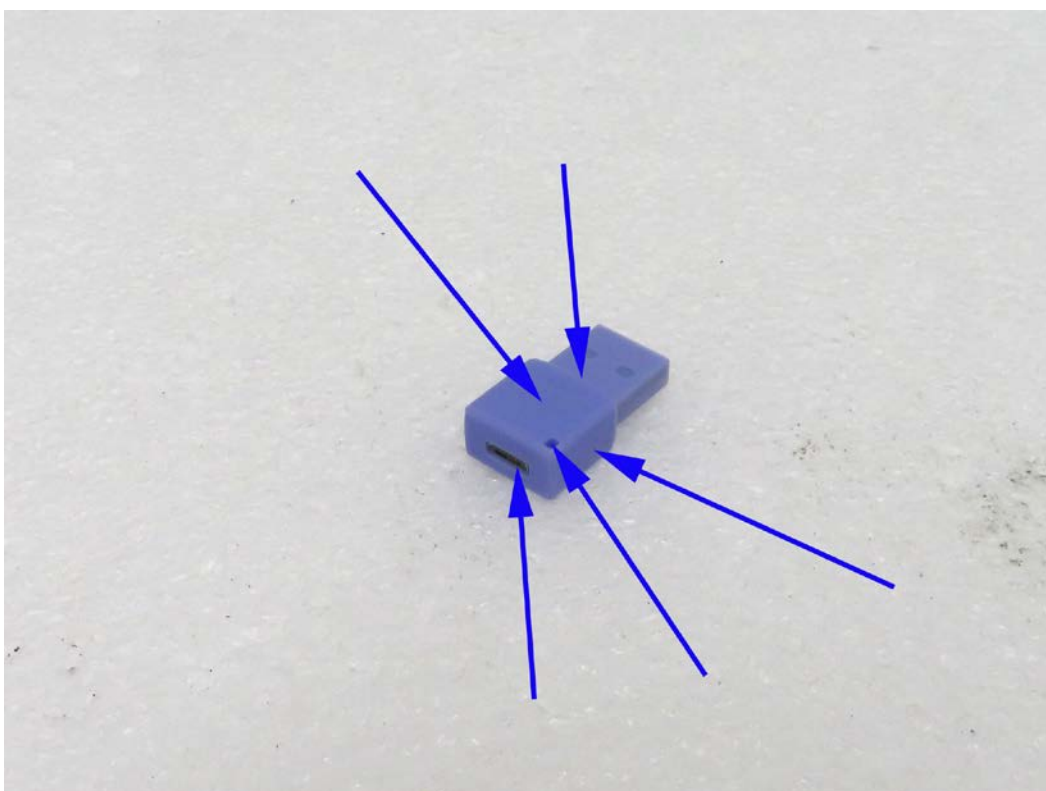

8.5 Test Point: Configuration 4

Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.

Figure 1: Test Point Assignments Discharge:



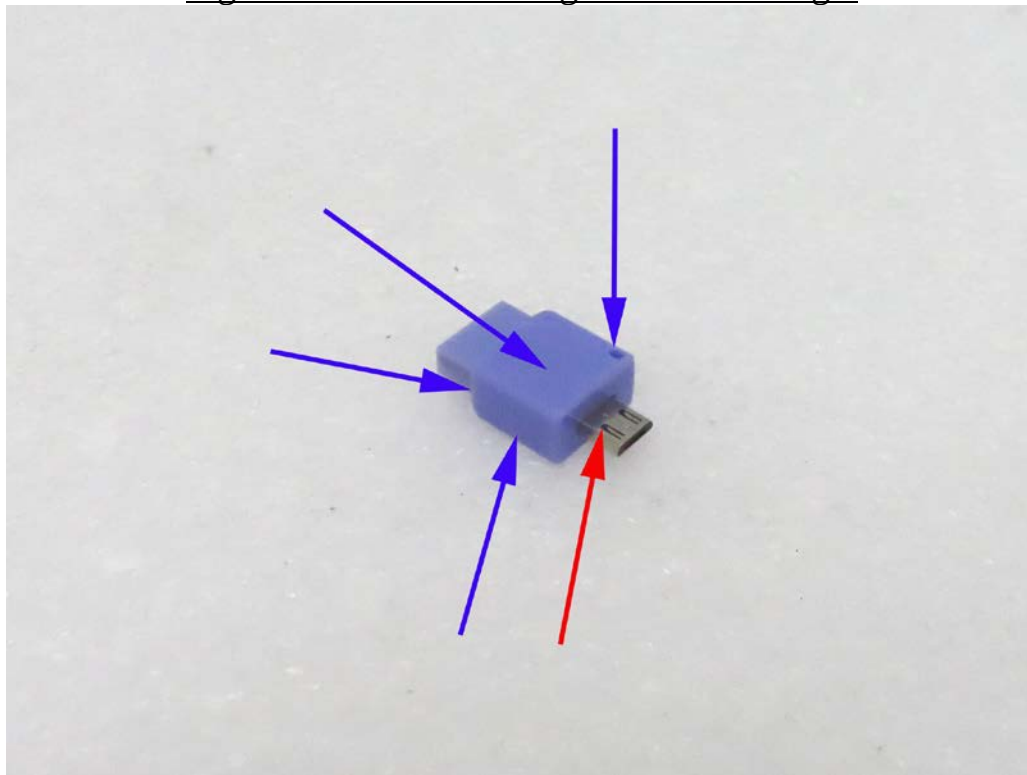


Figure 2: Test Point Assignments Discharge:

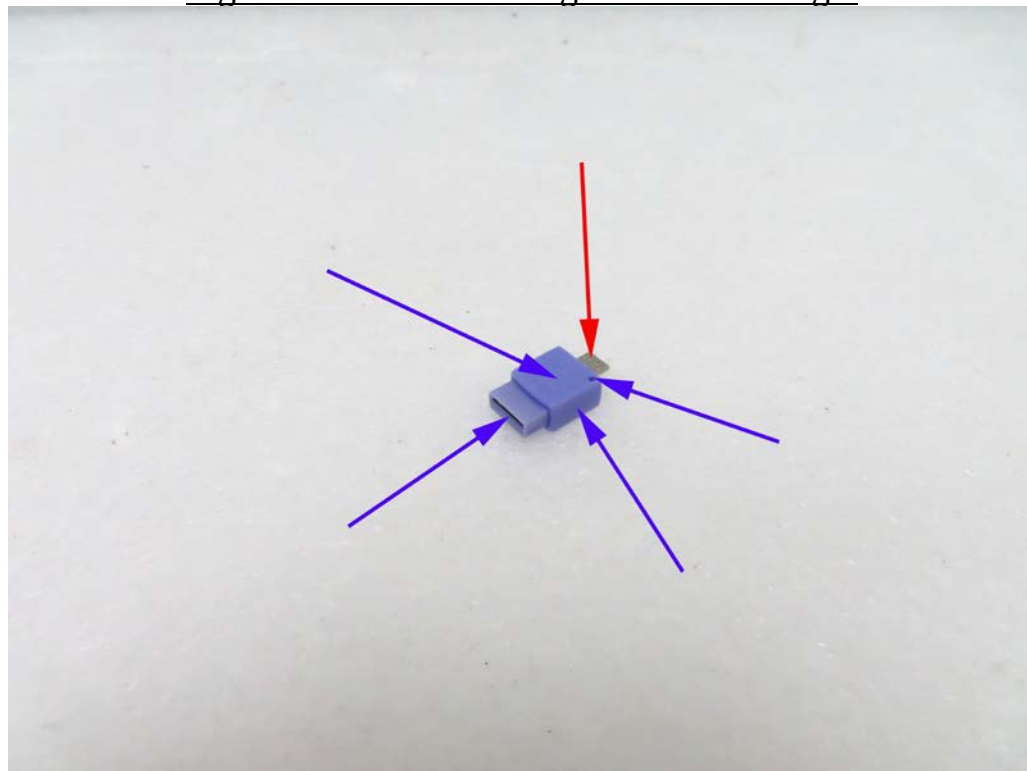


8.6 Test Setup Photo


Configuration 1

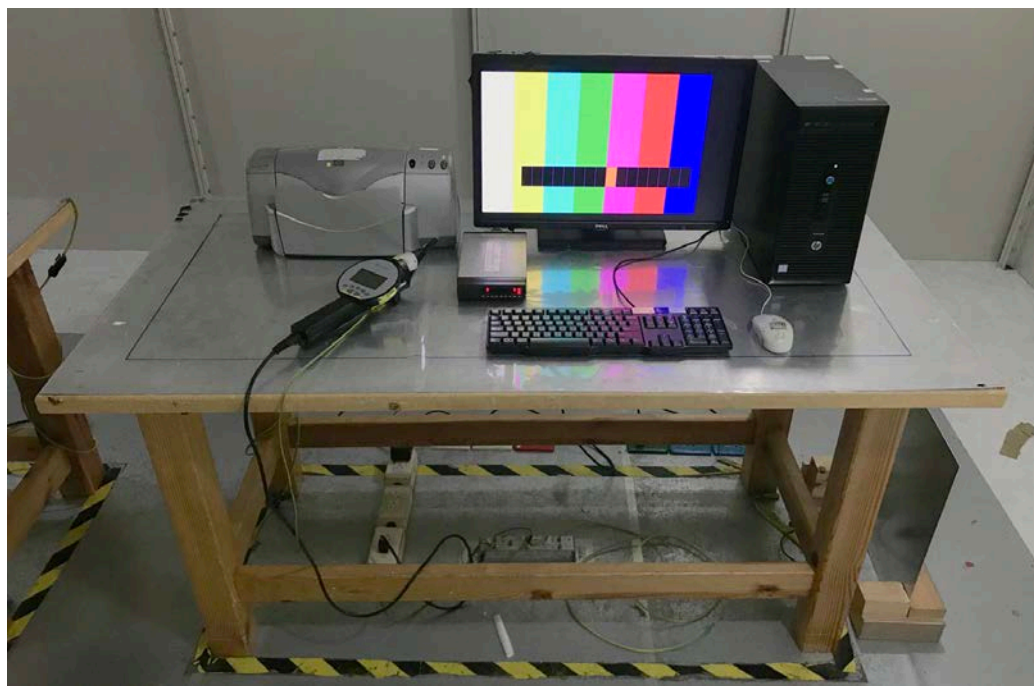


Configuration 2

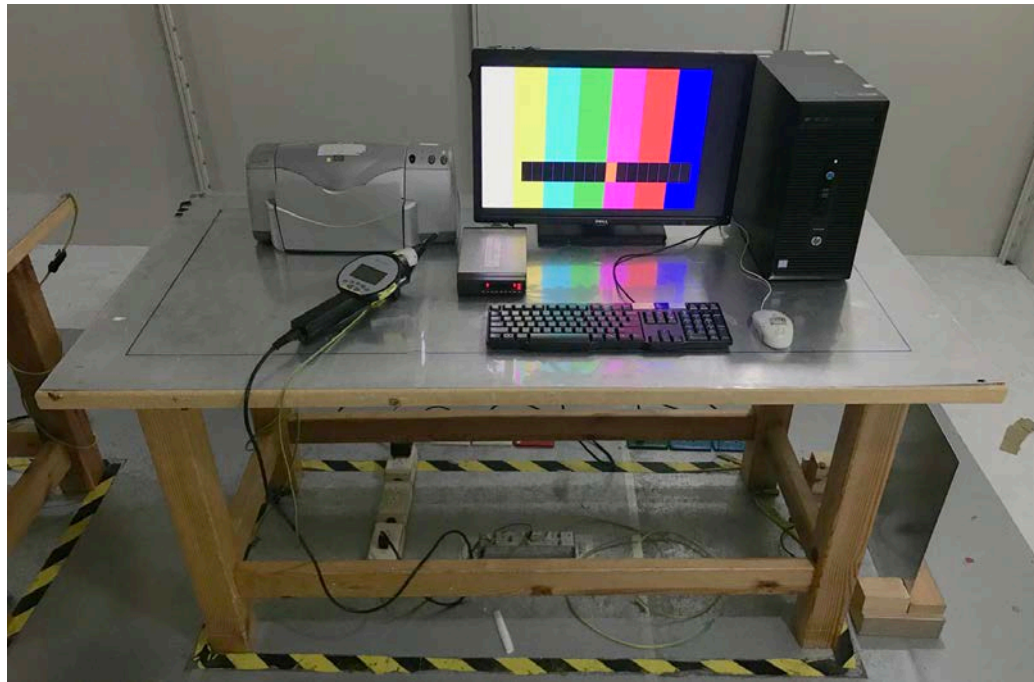

Configuration 3

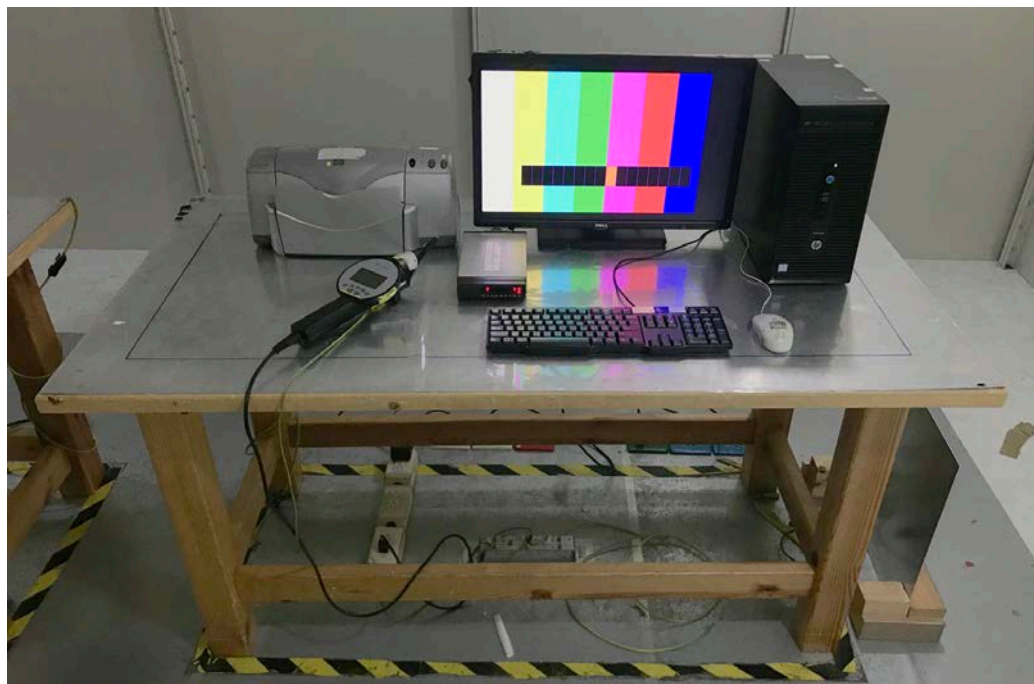

Configuration 4

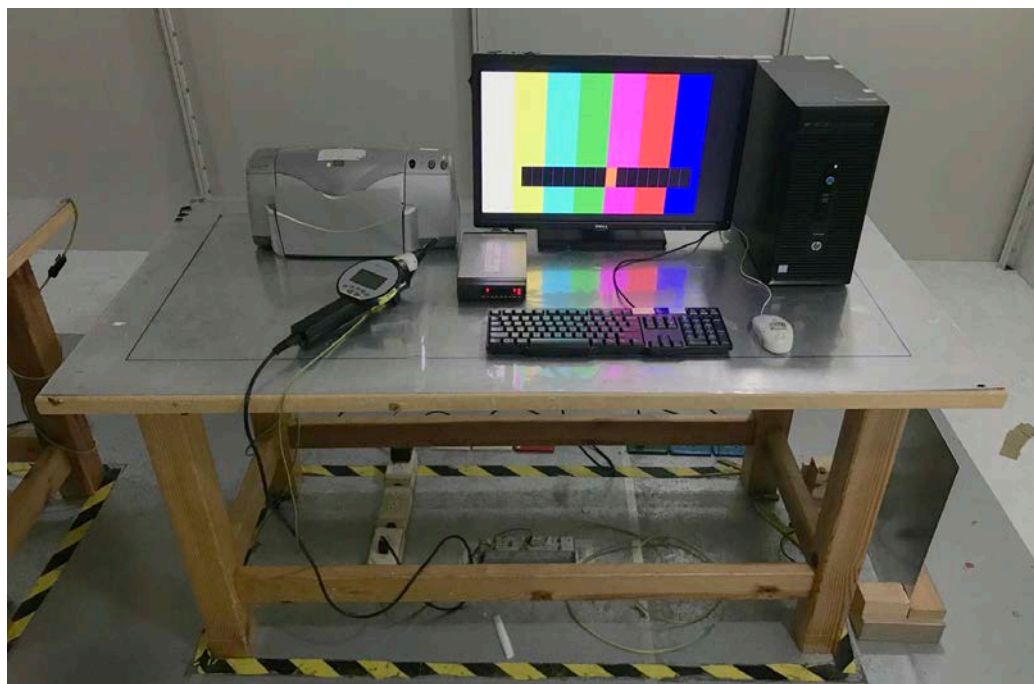

9. Radio-Frequency, Electromagnetic Field immunity


9.1 Test Specification and Setup

9.1.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-3 / IEC 61000-4-3 / BS EN 61000-4-3 (details referred to Sec 1.2)
Test Level:	3 V/m
Modulation:	AM 1kHz 80%
Frequency range:	80 MHz~1 GHz 1800MHz, 2600MHz, 3500MHz, 5000MHz
Frequency Step:	1% of last step frequency
Dwell time:	2s
Polarization:	Vertical and Horizontal
EUT Azimuth Angle	☒ 0° ☒ 90° ☒ 180° ☒ 270°
Criteria:	A
Test Procedure:	refer to ISL QA -T4-E-S8
Temperature:	24°C
Humidity:	55%

9.1.2 Test Setup

The field sensor is placed at one calibration grid point to check the intensity of the established fields on both polarizations. EUT is adjusted to have each side of EUT face coincident with the calibration plane. A CCD camera and speakers are used to monitor the condition of EUT for the performance judgment.

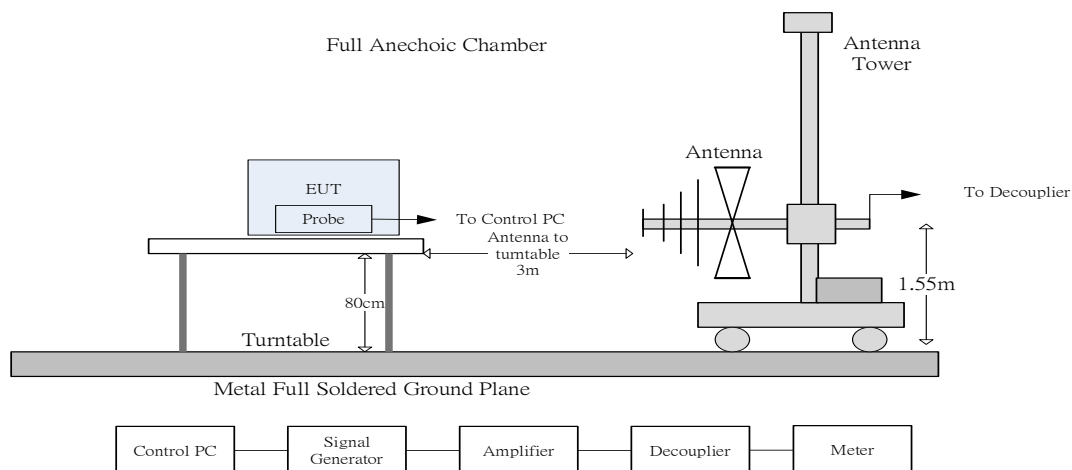

9.1.3 Test Result

Performance of EUT complies with the given specification.

9.2 Test Setup Photo

Configuration 1



Configuration 2



Configuration 3



Configuration 4



10. Electrical Fast transients/burst immunity

10.1 Test Specification and Setup

10.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-4 / IEC 61000-4-4 / BS EN 61000-4-4 (details referred to Sec 1.2)
Test Level:	AC Power Port: +/- 1 kV
Rise Time:	5ns
Hold Time:	50ns
Burst Period:	300ms
Repetition Frequency:	5kHz
Criteria:	B
Test Procedure:	refer to ISL QA -T4-E-S9
Temperature:	24°C
Humidity:	55%

Test Procedure


The EUT was setup on a nonconductive table 0.1 m above a reference ground plane.

Test Points	Polarity	Result	Comment
Line	+	N	60 sec
	-	N	60 sec
Neutral	+	N	60 sec
	-	N	60 sec
Ground	+	N	60 sec
	-	N	60 sec
Line and Neutral	+	N	60 sec
	-	N	60 sec
Line and Ground	+	N	60 sec
	-	N	60 sec
Neutral and Ground	+	N	60 sec
	-	N	60 sec
Line and Neutral and Ground	+	N	60 sec
	-	N	60 sec

Note: 'N' means normal, the EUT function is correct during the test.

10.1.2 Test Setup

EUT is at least 50cm from the conductive structure.

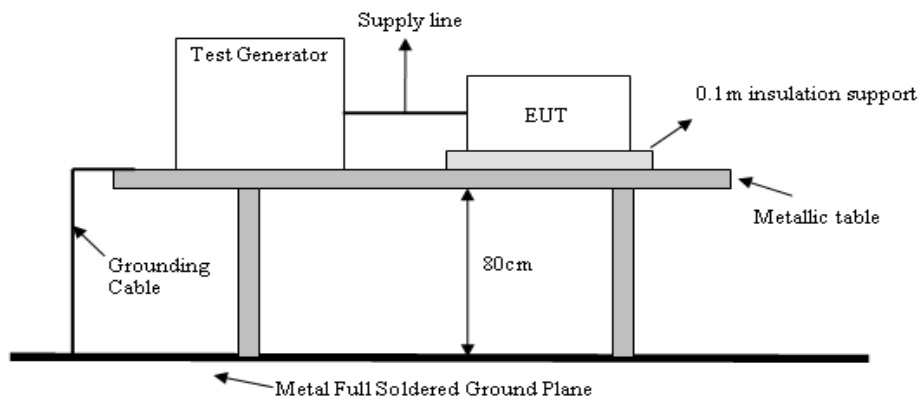

10.1.3 Test Result

Performance of EUT complies with the given specification.

10.2 Test Setup Photo

Configuration 1



Configuration 2



Configuration 3



Configuration 4




11. Surge Immunity

11.1 Test Specification and Setup

11.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-5 / IEC 61000-4-5 / BS EN 61000-4-5 (details referred to Sec 1.2)
Test Level:	Line to Line: +/- 0.5 kV, +/- 1 kV Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 2kV
Rise Time:	1.2us
Hold Time:	50us
Repetition Rate:	30 seconds
Angle:	☐ 0° ☒ 90° ☐ 180° ☒ 270°
Criteria:	B
Test Procedure:	refer to ISL QA -T4-E-S10
Temperature:	24°C
Humidity:	56%

11.1.2 Test Setup

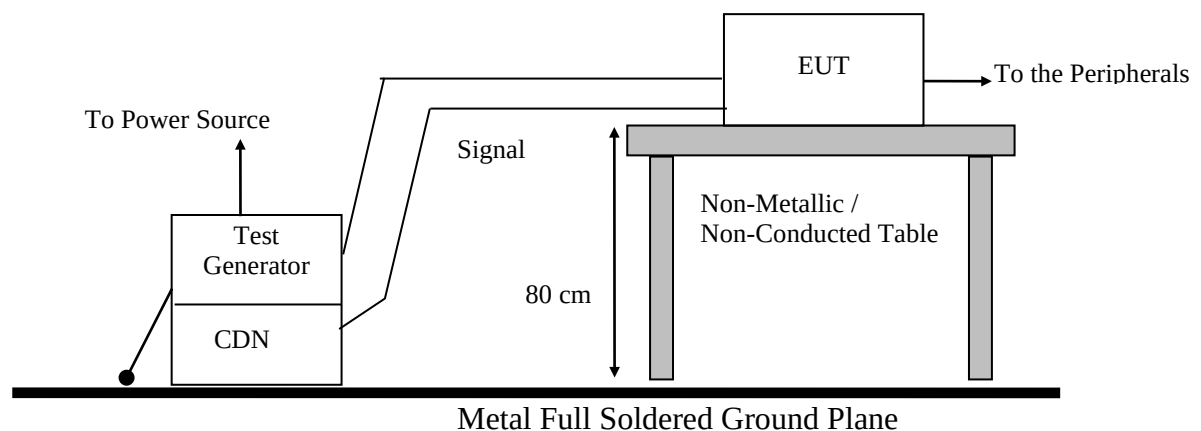

11.1.3 Test Result

Performance of EUT complies with the given specification.

11.2 Test Setup Photo

Configuration 1



Configuration 2



Configuration 3



Configuration 4




12. Immunity to Conductive Disturbance

12.1 Test Specification and Setup

12.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-6 / IEC 61000-4-6 / BS EN 61000-4-6 (details referred to Sec 1.2)
Frequency range and Test Level:	0.15MHz to 10MHz: 3 Vrms 10MHz to 30MHz: 3Vrms to 1Vrms 30MHz to 80MHz: 1Vrms
Modulation:	AM 1kHz 80%
Frequency Step:	1% of last Frequency
Dwell time:	2s
Criteria:	A
CDN Type:	CDN M2+M3
Test Procedure:	refer to ISL QA -T4-E-S11
Temperature:	23°C
Humidity:	56%

12.1.2 Test Setup

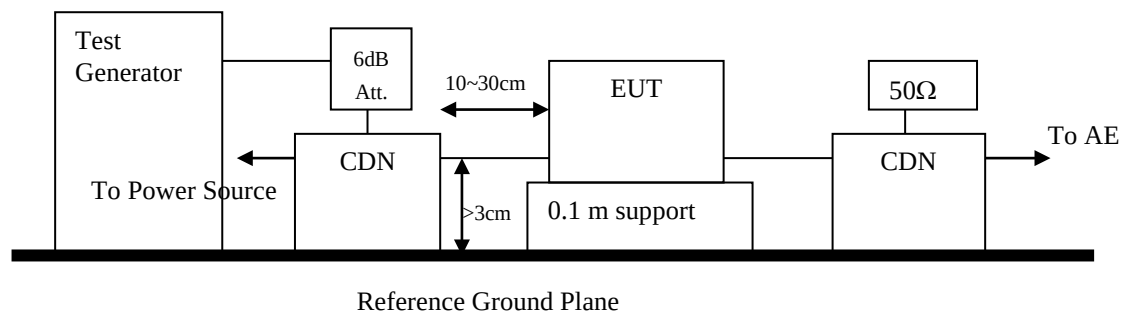

12.1.3 Test Result

Performance of EUT complies with the given specification.

12.2 Test Setup Photo

Configuration 1




Configuration 2



Configuration 3



Configuration 4

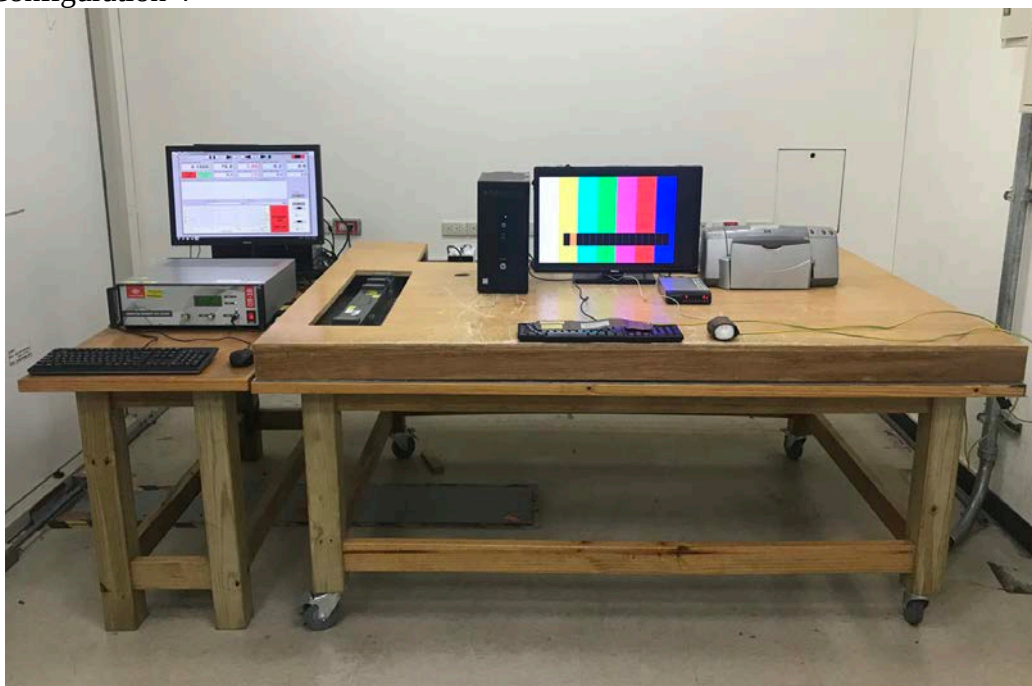


13. Power Frequency Magnetic Field immunity

13.1 Test Specification and Setup

13.1.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-8 / IEC 61000-4-8 / BS EN 61000-4-8 (details referred to Sec 1.2)
Test Level:	1A/m
Polarization:	X, Y, Z
Criteria:	A
Test Procedure:	refer to ISL QA -T4-E-S12
Temperature:	23°C
Humidity:	56%

13.1.2 Test Setup

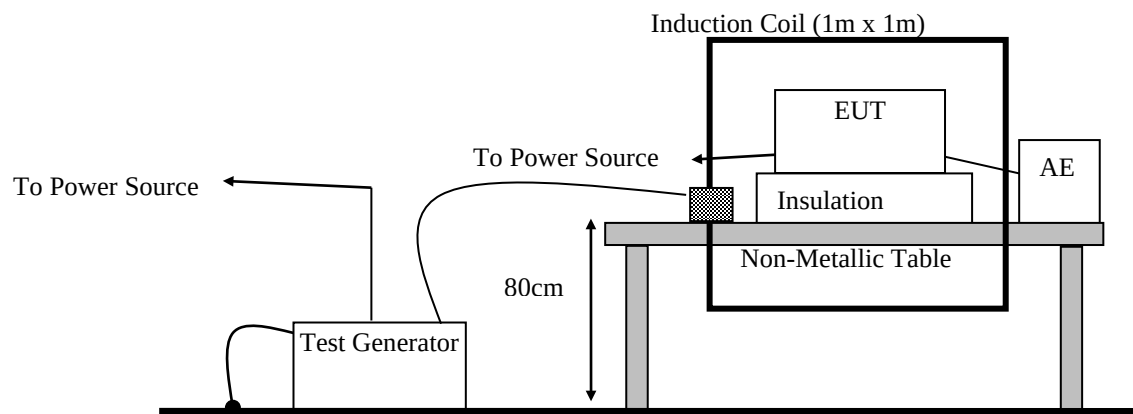

13.1.3 Test Result

Performance of EUT complies with the given specification.

13.2 Test Setup Photo

Configuration 1




Configuration 2



Configuration 3



Configuration 4

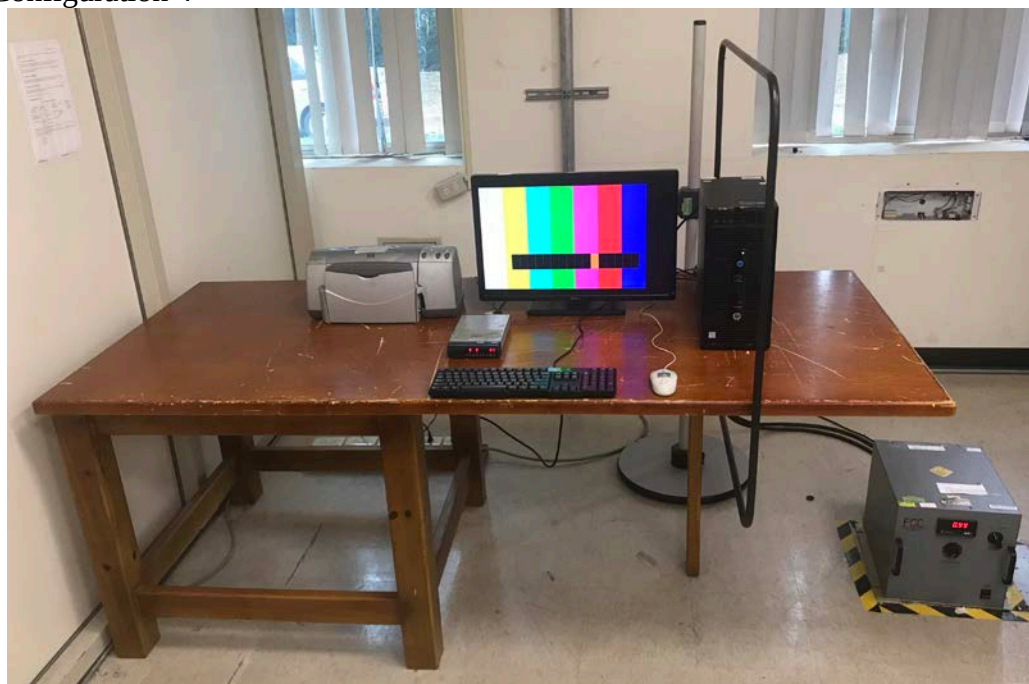


14. Voltage Dips, Short Interruption and Voltage Variation immunity

14.1 Test Specification and Setup

14.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-11 / IEC 61000-4-11 / BS EN 61000-4-11 (details referred to Sec 1.2)
When the product is greater than 16A does not apply to this Standard, it is not necessary to be tested on this item. In addition, IEC/EN 61000-4-34 Standard was used to evaluating.	
Test Level:	>95% in 0.5 cycle
Criteria:	B
Test Level:	30% in 25 cycle
Criteria:	C
Test Level:	>95% in 250 cycle
Criteria:	C
Phase:	0°; 180°
Test intervals:	3 times with 10s each
Test Procedure:	refer to ISL QA -T4-E-S13
Temperature:	23°C
Humidity:	55%

14.1.2 Test Setup

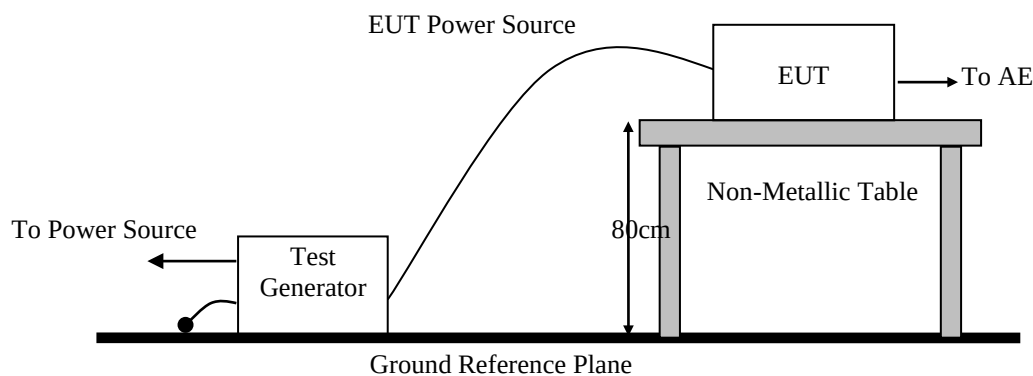

14.1.3 Test Result

Performance of EUT complies with the given specification.

14.2 Test Setup Photo

Configuration 1



Configuration 2



Configuration 3



Configuration 4



15. Harmonics

15.1 Test Specification and Setup

15.1.1 Test Specification


Port:	AC mains
Active Input Power:	<75W
Basic Standard:	EN IEC 61000-3-2 / IEC 61000-3-2 / BS EN IEC 61000-3-2 (details referred to Sec 1.2)
Test Duration:	2.5min
Class:	A
Test Procedure:	refer to ISL QA -T4-E-S14
Temperature:	23°C
Humidity:	56%

Test Procedure

The EUT is supplied in series with shunts or current transformers from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the EUT. The EUT is configured to its rated current with additional resistive load when the testing is performed.

Equipment having more than one rated voltage shall be tested at the rated voltage producing the highest harmonics as compared with the limits.

15.1.2 Test Setup

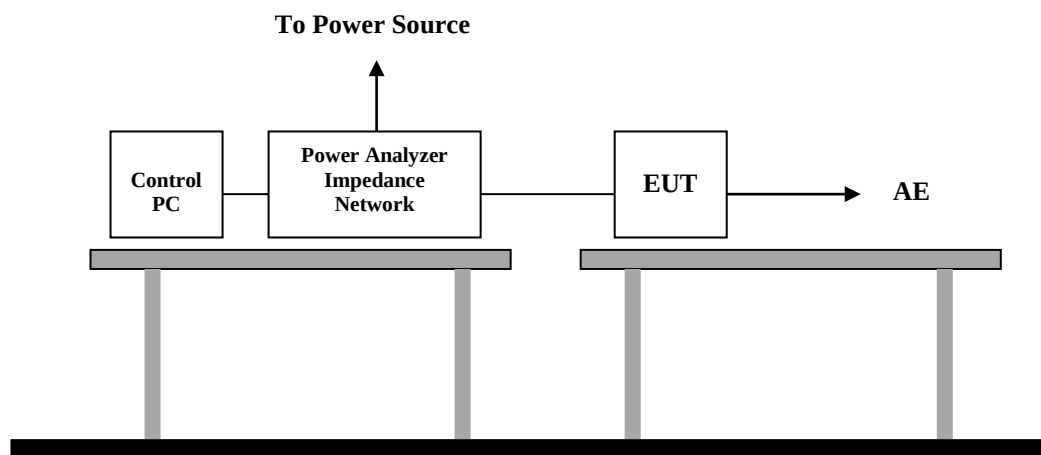

15.1.3 Limit

Limits of Class A Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current A	Harmonics Order n	Maximum Permissible harmonic current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	$8 \leq n \leq 40$	$0.23 * 8/n$
11	0.33		
13	0.21		
$15 \leq n \leq 39$	$0.15 * 15/n$		

15.1.4 Test Result

Active input power under 75W, no limit apply, declare compliance.

16. Voltage Fluctuations

16.1 Test Specification and Setup


16.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-3-3 / IEC 61000-3-3 / BS EN 61000-3-3 (details referred to Sec 1.2)
Test Procedure:	refer to ISL QA -T4-E-S14
Observation period:	For Pst 10min
	For Plt 2 hours
Temperature:	23°C
Humidity:	56%

Test Procedure

The EUT is supplied in series with reference impedance from a power source with the voltage and frequency as the nominal supply voltage and frequency of the EUT.

16.1.2 Test Setup

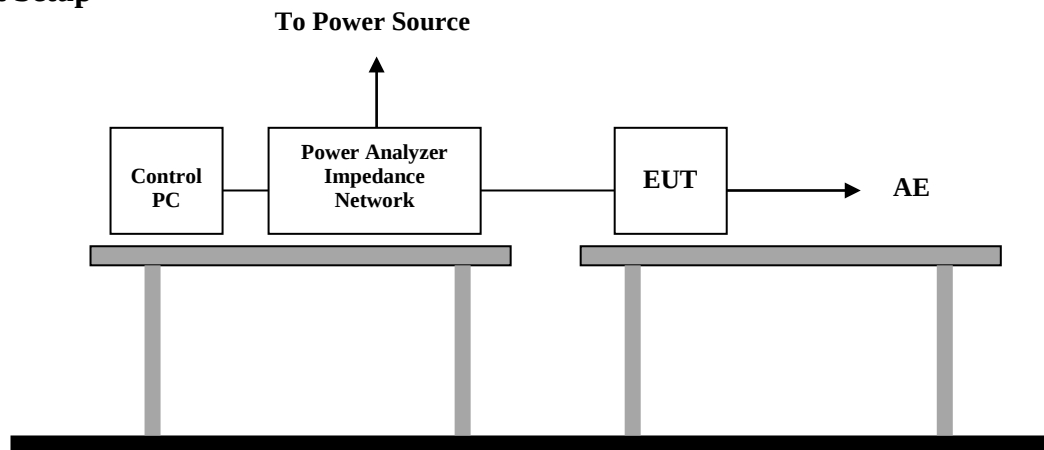

16.1.3 Test Result

Performance of EUT complies with the given specification.

16.2 Test Data: Configuration 1


Test File: F-20220713_140
 Test Standard: Test per IEC 61000-3-3 Ed. 3.1 : 2017
 Test Class: Flicker Test, All Parameters
 Test Result: PASS
 Test Duration (min): 10

Source Qualification: Compliance with IEC 61000-3-3 Ed. 3.1 : 2017


Phase A

Vrms (Volts):	230.99	Frequency (Hz):	50.00
I _{rms} (Amps):	0.207	Power (W):	27.0
V-THD (%):	0.343	T-Max (ms):	0 (500)
dmax (%):	0.000 (7.000)	Hi dmax (%):	0.000 (7.000)
dc (%):	0.000 (3.300)	Hi dc (%):	0.000 (3.300)

Pst Spectrum

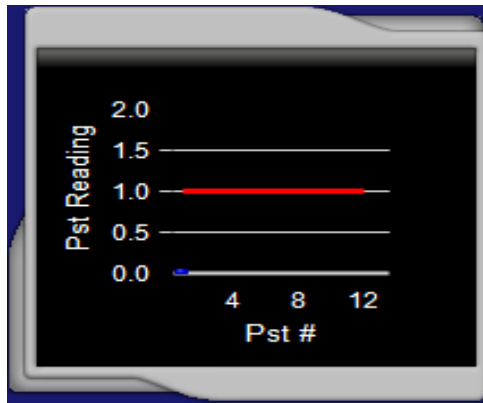

Plt Spectrum

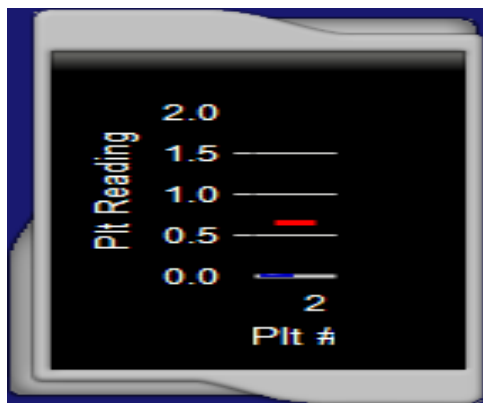

16.3 Test Data: Configuration 2


Test File: F-20220713_141
 Test Standard: Test per IEC 61000-3-3 Ed. 3.1 : 2017
 Test Class: Flicker Test, All Parameters
 Test Result: PASS
 Test Duration (min): 10

Source Qualification: Compliance with IEC 61000-3-3 Ed. 3.1 : 2017


Phase A

Vrms (Volts):	230.99	Frequency (Hz):	50.00
I _{rms} (Amps):	0.201	Power (W):	25.2
V-THD (%):	0.341	T-Max (ms):	0 (500)
dmax (%):	-0.892 (7.000)	Hi dmax (%):	-0.892 (7.000)
dc (%):	0.000 (3.300)	Hi dc (%):	0.000 (3.300)

Pst Spectrum

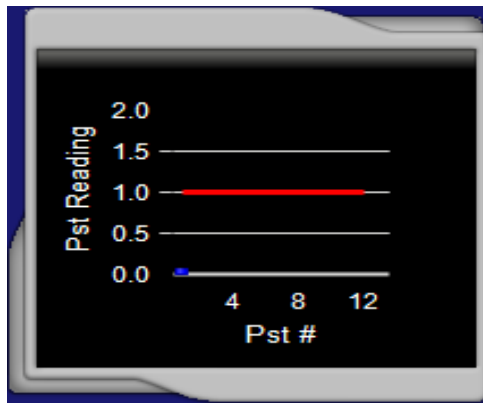

Plt Spectrum

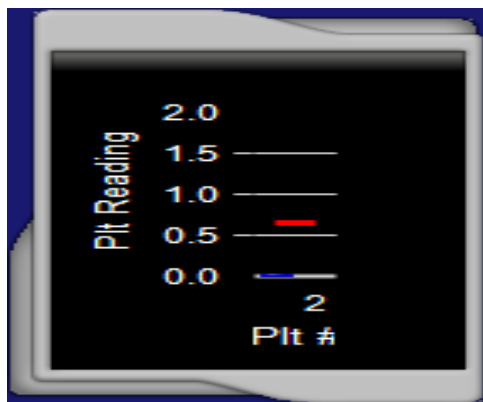

16.4 Test Data: Configuration 3


Test File: F-20220713_142
 Test Standard: Test per IEC 61000-3-3 Ed. 3.1 : 2017
 Test Class: Flicker Test, All Parameters
 Test Result: PASS
 Test Duration (min): 10

Source Qualification: Compliance with IEC 61000-3-3 Ed. 3.1 : 2017


Phase A

Vrms (Volts):	231.00	Frequency (Hz):	50.00
I _{rms} (Amps):	0.201	Power (W):	25.5
V-THD (%):	0.343	T-Max (ms):	0 (500)
dmax (%):	0.000 (7.000)	Hi dmax (%):	0.000 (7.000)
dc (%):	0.000 (3.300)	Hi dc (%):	0.000 (3.300)

Pst Spectrum

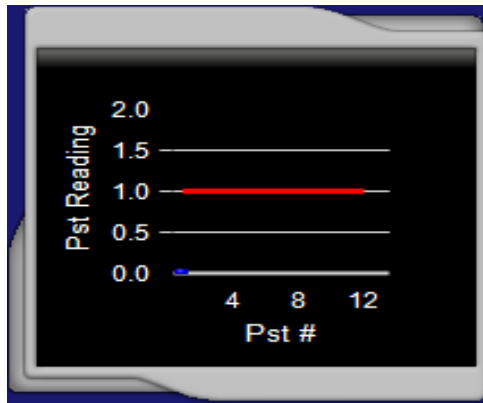

Plt Spectrum

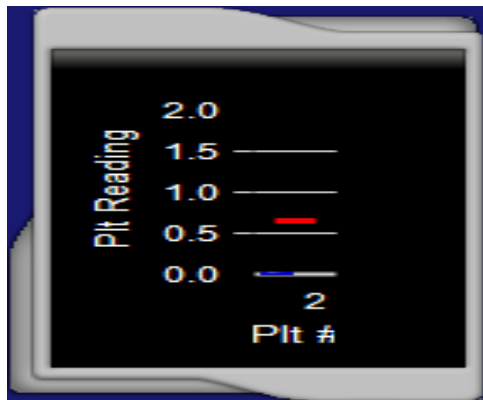

16.5 Test Data: Configuration 4


Test File: F-20220713_143
 Test Standard: Test per IEC 61000-3-3 Ed. 3.1 : 2017
 Test Class: Flicker Test, All Parameters
 Test Result: PASS
 Test Duration (min): 10

Source Qualification: Compliance with IEC 61000-3-3 Ed. 3.1 : 2017


Phase A

Vrms (Volts):	230.97	Frequency (Hz):	50.00
I _{rms} (Amps):	0.211	Power (W):	27.6
V-THD (%):	0.341	T-Max (ms):	0 (500)
dmax (%):	0.000 (7.000)	Hi dmax (%):	0.000 (7.000)
dc (%):	0.000 (3.300)	Hi dc (%):	0.000 (3.300)

Pst Spectrum

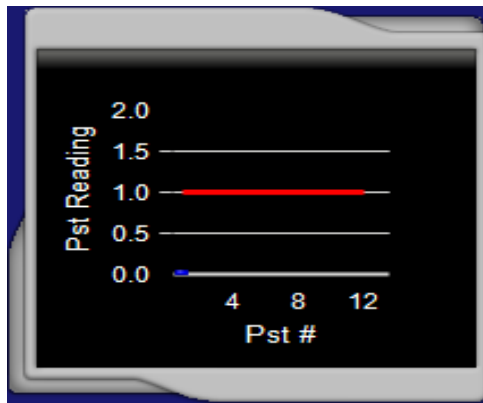

Plt Spectrum

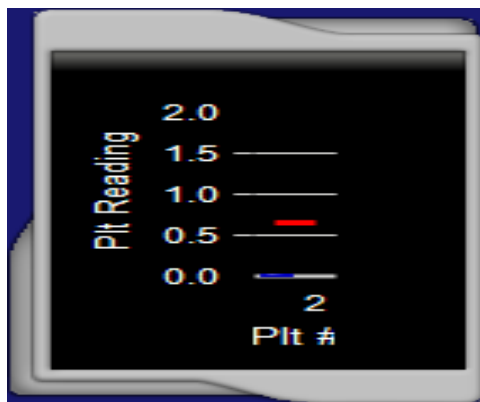

16.6 Test Setup Photo

Configuration 1



Configuration 2



Configuration 3



Configuration 4



17. Appendix

17.1 Appendix A: Test Equipment

17.1.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction 02	EMI Receiver 14	ROHDE & SCHWARZ	ESCI	101034	05/25/2022	05/25/2023
Conduction 02	Conduction 02-1 Cable	WOKEN	CFD 300-NL	Conduction 02 -1	10/13/2021	10/13/2022
Conduction 02	LISN 26	R&S	ENV216	102378	12/03/2021	12/03/2022
Conduction 02	LISN 03	R&S	ESH3-Z5	828874/010	11/11/2021	11/11/2022

Location Chamber02	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Radiation	BILOG Antenna 17 (30MHz~1GHz)	SCHWARZBECK	VULB 9168+EMCI-N-6-05	645	05/18/2022	05/18/2023
Radiation	Preamplifier 25	EMCI	EMC9135	980295	03/31/2022	03/31/2023
Radiation	Coaxial Cable Chmb 02-10M-02	EMC	RG214U	Chmb 02-10M-02	10/13/2021	10/13/2022
Radiation	EMI Receiver 13	ROHDE & SCHWARZ	ESCI	101015	06/07/2022	06/07/2023

Location Chmb14	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Rad. Above 1GHz	Spectrum Analyzer 25	R&S	FSV 40	101499	10/29/2021	10/29/2022
Rad. Above 1GHz	Horn Antenna 06	ETS-Lindgren	3117	00066665	12/20/2021	12/20/2022
Rad. Above 1GHz	Preamplifier 20	EMC INSTRUMENT	EMC051845	980084	11/16/2021	11/16/2022
Rad. Above 1GHz	Microwave Cable 11	HUBER SUHNER	SUCOFLEX 106	78034/6	03/09/2022	03/09/2023
Rad. Above 1GHz	Microwave Cable 26	EMCI	EMC104-NM-S M-800	141112	03/09/2022	03/09/2023

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
EN61K-4-2	ESD Gun 14	EM TEST	Dito	P2223264472	07/07/2022	07/07/2023
EN61K-4-3	Broadband Log-Periodic Antenna	AR	AT1080	310698	N/A	N/A
EN61K-4-3	Horn Antenna RF-01	AR	ATS700M11G	0335864	N/A	N/A
EN61K-4-3	Amplifier 80Mz~1GHz 250W	AR	250W1000C	358877	N/A	N/A
EN61K-4-3	Amplifier 0.7~6GHz 60W	AR	60S1G6	358973	N/A	N/A
EN61K-4-3	Broadband Coupler 80M~1GHz	Amplifier Research	DC6180A	0341805	N/A	N/A
EN61K-4-3	Coaxial Cable	INSULATED	NPS-4806-2360-NP3	108599.003.01.03	N/A	N/A
EN61K-4-3	Broadband Coupler 0.8G~4.26GHz	AR	DC7144A	0335226	N/A	N/A
EN61K-4-3	Broadband Coupler 4G~8GHz	AR	DC7350A	0335817	N/A	N/A
EN61K-4-3	Signal Generator 07	ROHDE&SCHWARZ	SMB100A	107780	11/23/2021	11/23/2022
EN61K-4-4	Signal Generator 10	EMC Partner	IMU3000	1547	09/01/2021	09/01/2022
EN61K-4-5	CDN-UTP8 03	EMC-PARTNER	CDN-UPT8ESD3	1546	03/29/2022	03/29/2023
EN61K-4-5	Surge Tester	EMC Partner	MIG0603IN3	523	07/10/2022	07/10/2023
EN61K-4-6	CDN M2+M3 04	TESEQ	CDN M016	43257	09/01/2021	09/01/2022
EN61K-4-6	Coaxial Cable 4-6 02-1			4-6 02-1	N/A	N/A
EN61K-4-6	Conducted Immunity Test System 03	Frankonia	CIT-10-75	126B1151	01/14/2022	01/14/2023
EN61K-4-8	Magnetic Field Immunity Loop	FCC	F-1000-4-8-L-1 M	01037	05/30/2022	05/30/2023
EN61K-4-8	Magnetic Field Test Generator	FCC	F-1000-4-8-G-12 5A	01038	05/30/2022	05/30/2023
EN61K-4-11	Voltage Dip and UP Simulator 01	NoiseKen	VDS-2002	VDS1750439	09/17/2021	09/17/2022
EN61K-3-2/3, EN61K-3-11-12	Harmonics & Flickers Test System 04	PACIFIC*APS	ECTS2-3450F-n	550072	04/20/2022	04/20/2023

PS: N/A => The equipment does not need calibration.

****Software for Controlling Spectrum/Receiver and Calculating Test Data**

Test Item	Filename	Version
EN IEC 61000-3-2	HFa-16 Program	v1.0.0.9
EN 61000-3-3	HFa-16 Program	v1.0.0.9
EN 61000-4-2	N/A	2.0
EN 61000-4-3	i2	529b
EN 61000-4-4	TEM A3000	v4.6.1
EN 61000-4-5	EMC Partner	1.69
EN 61000-4-6	i2	529b
EN 61000-4-8	N/A	
EN 61000-4-11(<16A)	NOISE KEN	2.0

Site	Filename	Version
Conduction/Radiation	EZ EMC	ISL-03A2

17.2 Appendix B: Uncertainty of Measurement

The laboratory measurement uncertainty accordance with refers to CISPR 16-4-2. If U_{lab} is less than or equal to U_{Cispr} in Table 1, then the test report may either state the value of U_{lab} or state that U_{lab} is less than U_{Cispr} .

The coverage factor $k = 2$ yields approximately a 95 % level of confidence.

<Conduction 02>

AMN: $\pm 2.90\text{dB}$

<Chamber 02 (10m)>

Horizontal

30MHz~200MHz: $\pm 4.42\text{dB}$

200MHz~1000MHz: $\pm 3.83\text{dB}$

Vertical

30MHz~200MHz: $\pm 4.57\text{dB}$

200MHz~1000MHz: $\pm 3.97\text{dB}$

<Chamber 14 (3m)>

1GHz~6GHz: $\pm 5.06\text{dB}$

<Immunity 02>

Test item	Uncertainty	Test item	Uncertainty
EN 61000-4-2 (ESD)		EN 61000-4-6 (CS)	
Rise time tr	$\leq 9.81\%$	CDN	1.73 dB
Peak current Ip	$\leq 4.83\%$	EM Clamp	3.37 dB
current at 30 ns	$\leq 4.84\%$	EN 61000-4-8 (Magnetic)	5.49 %
current at 60 ns	$\leq 4.84\%$	EN 61000-4-11 (Dips)	2.04 %
EN 61000-4-3 (RS)	2.66 dB	EN IEC 61000-3-2 (Harmonics)	0.43 %
EN 61000-4-4 (EFT)		EN 61000-3-3 (Fluctuations and Flicker)	8 %
voltage rise time (tr)	5.4 %		
peak voltage value (VP)	6.34 %		
voltage pulse width (t_w)	3.5 %		
EN 61000-4-5 (Surge)			
open-circuit voltage front time	10.5 %		
open-circuit voltage peak value	7.5 %		
open-circuit voltage duration (T_d)	53.33 μ s		

17.3 Appendix C: Photographs of EUT

Please refer to the File of **ISL-22LE0543P-MD**

--- END ---